


2004 DEC 6 AM 11 46

FORM APPROVED
OMB NO. 1004-0136
Expires: November 30, 2000

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

RECEIVED



1a. TYPE OF WORK



DRILL



REENTER

b. TYPE OF WELL



OIL



GAS WELL



OTHER



SINGLE ZONE



MULTIPLE ZONE

2. Name of Operator

Coleman Oil & Gas, Inc.

3a. Address

P.O. Drawer 3337, Farmington N.M. 87499

3b. Phone No. (include area code)

(505) 327-0356

4. Location of well (Report location clearly and in accordance with any State requirements.)*

At surface

900' FSL, 1050' FWL NMPM Latitude 36° 18' 30", Longitude 107° 55' 25"

At proposed prod. zone

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

South East of Farmington New Mexico on County RD. 7515 approximately 40 miles.

15. Distance from proposed*

location to nearest

property or lease line, ft.

900'

(Also to nearest drlg unit line, if any)

18. Distance from proposed location*

to nearest well, drilling, completed,

applied for, on this lease, ft.

NA

16. No. of Acres in lease

640

17. Spacing Unit dedicated to this well

320 ACRES W/2

19. Proposed Depth

1370'

20. BLM/ BIA Bond No. on file

BLM Blanket Bond #08510612

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

6632' GR

22. Approximate date work will start*

January-05

23. Estimated Duration

2 Weeks

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1 shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by existing bond on file (see item 20 above).
5. Operator certification.
6. Such other site specific information and/ or plans as may be required by the authorized officer.

25. Signature

Michael T. Hanson

Name (Printed/ Typed)

Michael T. Hanson

DATE

2-Dec-04

Title

Operations Engineer

Approved By (Signature)

Jim Gable

Name (Printed/ Typed)

DATE

3/11/05

Title

Acting Field Manager - Minerals

Office

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instructions On Reverse Side

NMOC

District I
PO Box 1980, Hobbs, NM 88241-1980

District II
PO Drawer DD, Artesia, NM 88211-0719

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
PO Box 2088
Santa Fe, NM 87504-2088

Form C-102

Revised February 21, 1994

Instructions on back

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

*API Number 30045-32726		*Pool Code 71629	*Pool Name BASIN FRUITLAND COAL
*Property Code 34701	*Property Name JUNIPER 17		*Well Number 14
*GRID No. 4838	*Operator Name COLEMAN OIL & GAS, INC.		*Elevation 6632'

¹⁰ Surface Location



UL or lot no.	Section	Township	Range	Lot Idh	Feet from the	North/South line	Feet from the	East/West line	County
M	17	24N	10W		900	SOUTH	1050	WEST	SAN JUAN

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idh	Feet from the	North/South line	Feet from the	East/West line	County


¹² Dedicated Acres 320.0 Acres - (W/2)	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--	-------------------------------	----------------------------------	-------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION
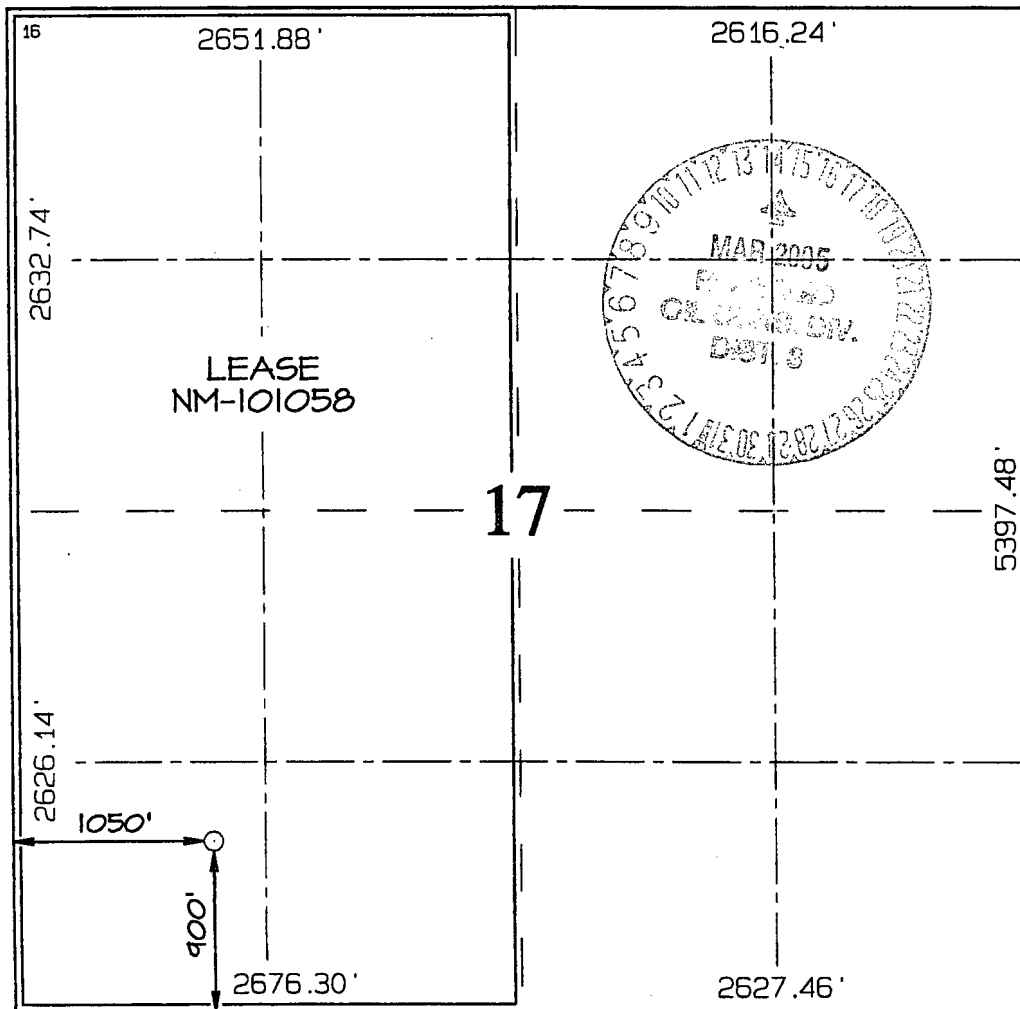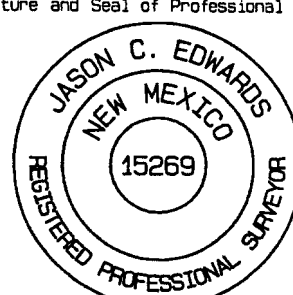
<div><p>¹⁶</p></div>	<p>¹⁷ OPERATOR CERTIFICATION</p> <p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief</p> <p><i>Michael T. Hanson</i> Signature <i>Michael T. HANSON</i> Printed Name <i>Engineer</i> Title <i>Dec 2, 2007</i> Date</p>
	<p>¹⁸ SURVEYOR CERTIFICATION</p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>Survey Date: DECEMBER 17, 2003</p> <p>Signature and Seal of Professional Surveyor</p> <div><p><i>JASON C. EDWARDS</i> Certificate Number 15269</p></div>

COLEMAN OIL & GAS, INC. JUNIPER #14-17
900' FSL & 1050' FWL, SECTION 17, T24N, R10W
NMPM, SAN JUAN COUNTY, NEW MEXICO
GROUND ELEVATION: 6632'

LATITUDE: 36°18'30"
LONGITUDE: 107°55'25"
 DATUM: NAD1927

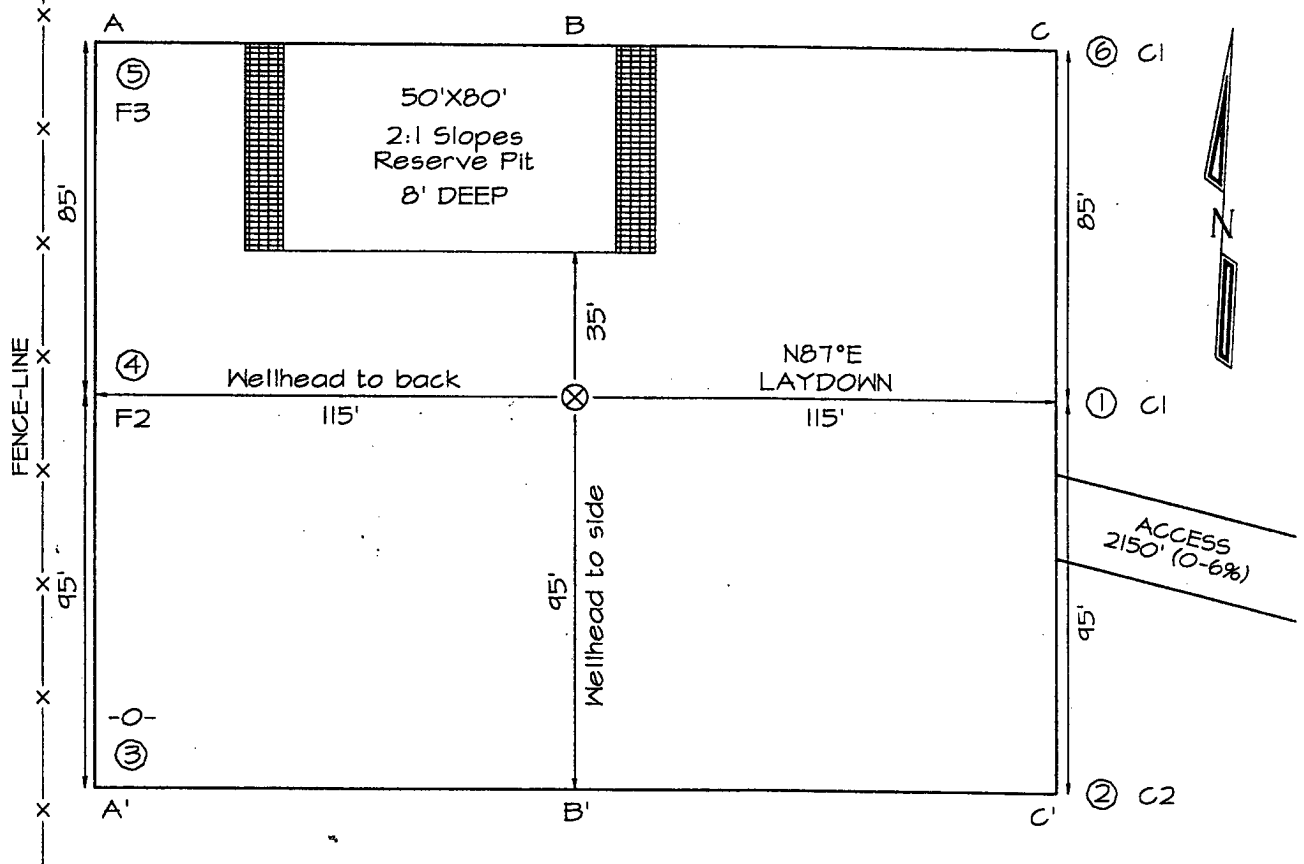

A-A'						
6642'						
6632'						
6622'						

B-B'						
6642'						
6632'						
6622'						

C-C'						
6642'						
6632'						
6622'						

Note: Contractor should call One-Call for location of any marked or unmarked buried pipelines or cables on well pad and/or access road at least two (2) working days prior to construction

Saturday, October 16, 2004

OPERATIONS PLAN

Well Name: Juniper 17 #14
Location: 900' FSL, 1050' FWL Section 17, T-24-N, R-10-W, NMPM
San Juan County, NM
Formation: Basin Fruitland Coal
Elevation: 6632' GL

Formation:	Top	Bottom	Contents
Nacimiento	Surface	385'	aquifer
Ojo Alamo	385'	495'	aquifer
Kirtland	495'	905'	
Fruitland	905'	1195'	gas
Pictured Cliffs	1195'	1370'	gas
Total Depth	1370'		

Drilling Contractor: Availability

Mud Program:

<u>Interval</u>	<u>Type</u>	<u>Weight</u>	<u>Vis.</u>	<u>Fluid Loss</u>
0 - 120'	Spud	8.4 - 9.0	40 - 50	no control
120 - 1370'	Non-dispersed	8.4 - 9.0	30 - 60	6cc or less

Logging Program: Porosity Log - Triple Litho Density W/ GR and CAL.
Induction Log - Array Induction W/ GR and SP

Coring Program: None

Casing Program:

<u>Hole Size</u>	<u>Depth Interval</u>	<u>Csg. Size</u>	<u>Wt.</u>	<u>Grade</u>
12 1/4"	0' - 120'	8 5/8"	24#	J-55 or K-55
7 7/8"	120' - 1370'	5 1/2"	15.5#	J-55 or K-55

Tubing Program:

0' - 1225'	2 7/8"	6.50#	J-55
------------	--------	-------	------

Float Equipment:

8 5/8" surface casing - saw tooth guide shoe. One Centralizer.

5 1/2" production casing - Cement guide shoe and self fill insert float collar. Place float one joint above shoe. Five centralizers spaced every other joint above shoe and five centralizers every other joint from top of well.

Wellhead Equipment:

8 5/8" x 5 1/2" Braiden Head and 5 1/2" x 2 7/8" Tubing Head. Independent Well Head assembly with a minimum rated working pressure of 1000 psig.

Cementing:**8 5/8" Surface Casing -**

Cement with 92 sacks Class "B" cement with 1/4# celloflake/sx and 2% calcium chloride (108.56 cu. ft. of slurry, 100% excess to circulate to surface). WOC 12 hrs. Test casing to 750 psi/30 minutes.

5 1/2" Production Casing -

Before cementing circulate hole with at least 1 1/2 hole volumes of mud. Precede cement with 20 bbls of fresh water. Lead with 134 sacks (349.74 cu. ft) of Class "G" with 3% D79 and 1/4# per sack D29. (Yield = 2.61 cu. ft. /sk; slurry weight = 11.7 PPG). Tail with 90 sx (113.4 cu. ft.) of Class "G" with 50/50 POZ, 2% GEL D-20, 5# per sack Gilsonite, .1% D-46, 1% S-1 and 1/4# per sack D-29. (Yield = 1.26 cu. ft. / sk; slurry weight = 13.5 PPG). Total cement volume is 463.14 cu. ft. (100% excess on open hole, calculated on cement volumes). WOC 12 hrs.

BOP and Tests:

Surface to Total Depth – Annular or Double Ram type 2000 psi (minimum) double gate BOP stack (Reference Figure #1, #2, #3). Prior to drilling out surface casing, test blind rams and casing to 750 psig for 30 minutes; all pipe rams and choke assembly to 750 psig for 15 minutes each. 30

From surface to TD - choke manifold (Reference Figure #3).

Pipe rams will be actuated at least once each day and blind rams actuated once each trip to test proper functioning. An upper kelly cock valve with handle and drill string safety valves to fit each drill string will be maintained and available on the rig floor.

Additional information:


- The Fruitland Coal formation will be completed.
- Anticipated pore pressure for the Fruitland is 250 psi.
- New casing will be utilized.
- Pipe movement (either rotation or reciprocation) will be done if hole conditions permit.

Date: 12/2/09 Drilling Engineer: Michael H. [Signature]

BOP Configuration 2M psi System

Rotating head will be used during
air or gas drilling only.

Drilling spool single wing valves
during normal drilling operations.
Dual wing valves during air or gas
dilling.

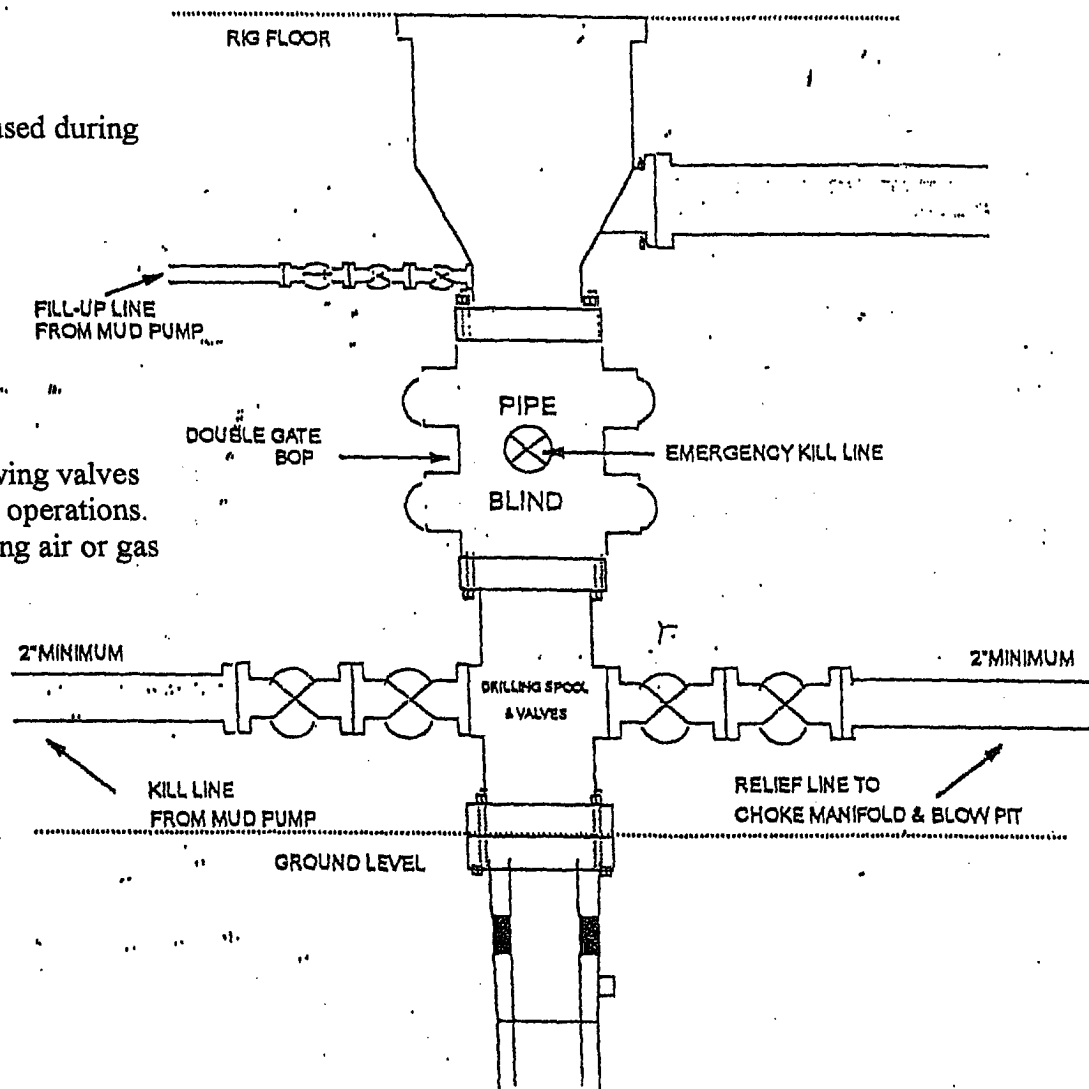

13 5/8" and 11" Bore, 2000psi minimum working pressure double gate BOP to be equipped with blind and pipe rams: A Schaffer Type 50 or equivalent rotating head to be installed on the top of the BOP. All equipment is 2000psi working pressure/ or greater.

FIGURE #1


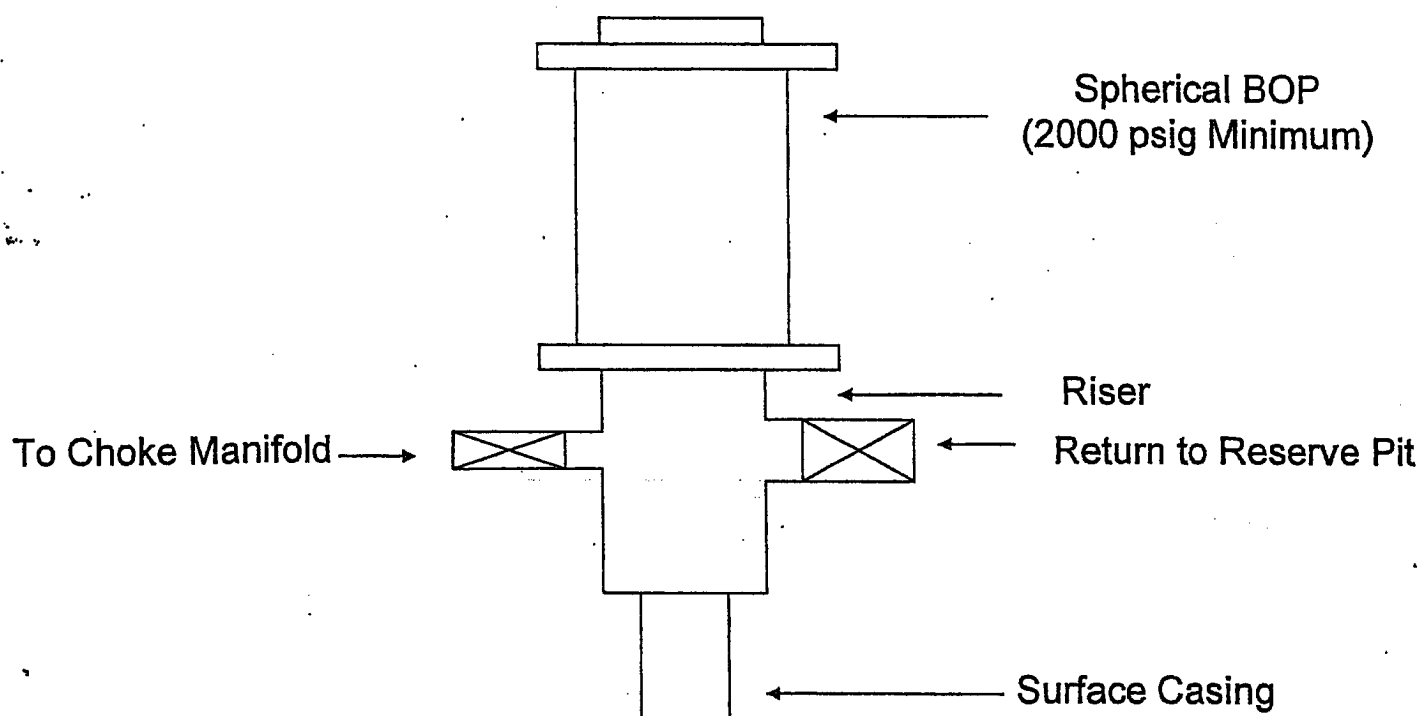


FIGURE #2

Choke Manifold Configuration 2M System

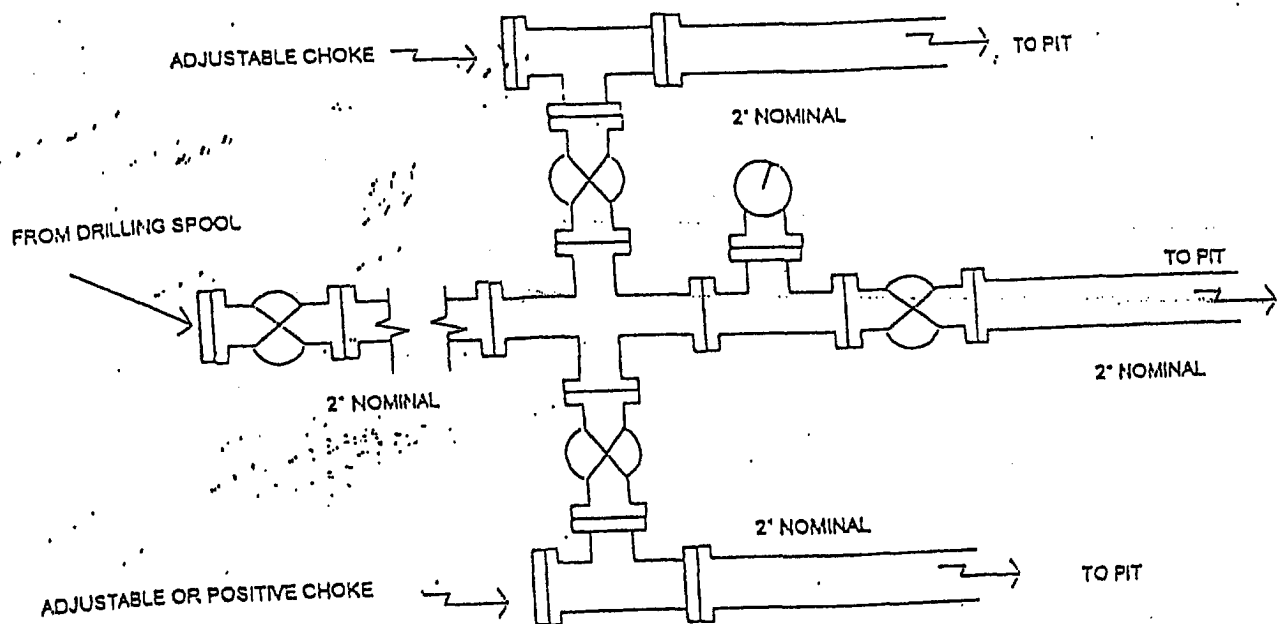

Minimum choke manifold installation from surface to Total Depth.
2" minimum, 2000psi working pressure equipment with two chokes.

Figure #3