


Wellsite Schematic

VASALY COM #2 SWD

API / UWI 3004529936	Surface Legal Location 022-030N-011W-B	Field Name WILDCAT	License No. #0900	Well Configuration Type
Ground Elevation (ft) 5,856.00	Orig KB/RT (ft) 5,882.00	KB-Grd (ft) 26.00	KB-CF (ft) 5,882.00	KB-TF (ft) 5,882.00
			Other Elevation Type	Other Elevation (ft)

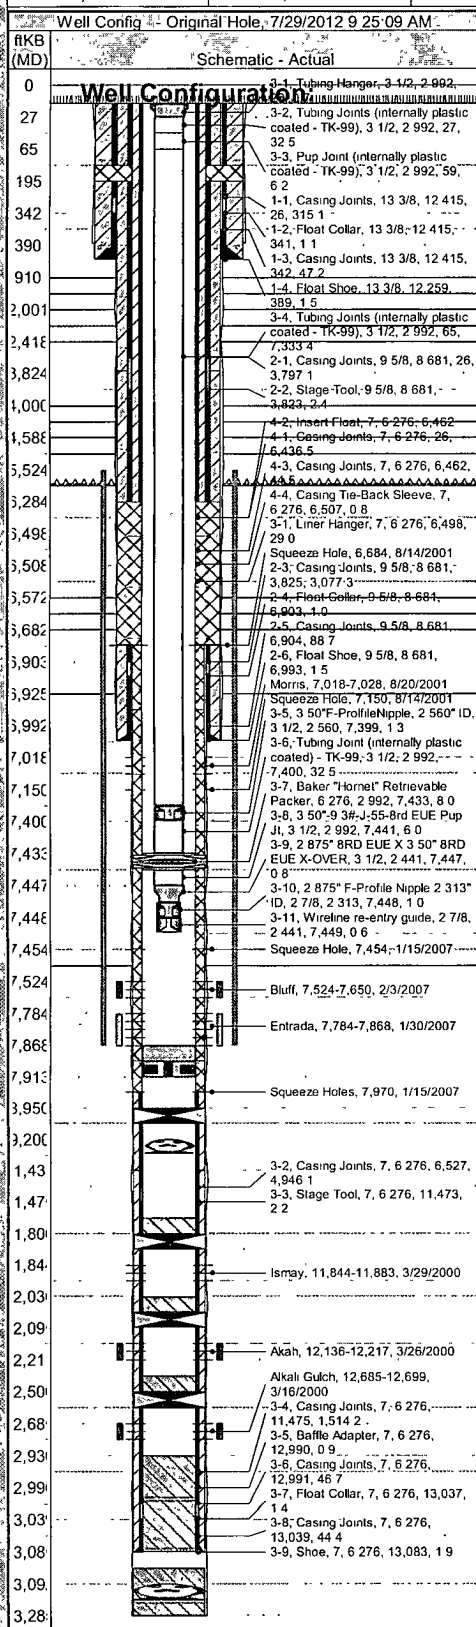


WELLHEADS									
Type				Install Date					
Description	Make	Model	WP (psi)	Top Ring Gasket	Min Bore (in)				
CASING STRINGS									
Casing Description	String OD (in)	String Wt (lbs/ft)	String Grade	String Top Thrd	Set Depth (ftKB)				
Surface	13 3/8	68.00	J-55		390.9				
Production	7	26.00	P-110	LT&C	6,507.8				
Intermediate	9 5/8	47.00	L-80		6,994.0				
Liner	7	26.00	P-110		13,085.0				
PBTDs									
Depth (ftKB)	KO MD (ftKB)		TD (max) (ftKB)						
7,908.0			13,285.0						
PERFORATIONS									
Date	Top (ftKB)	Botm (ftKB)	Zone	Current Status					
8/14/2001	6,684.0	6,684.0		RCVD JUL 31 '12					
8/20/2001	7,018.0	7,028.0							
8/14/2001	7,150.0	7,150.0							
1/15/2007	7,454.0	7,454.0							
2/3/2007	7,524.0	7,650.0		OIL CONS. DIV.					
1/30/2007	7,784.0	7,868.0							
1/15/2007	7,970.0	7,970.0							
3/29/2000	11,844.0	11,883.0							
3/26/2000	12,136.0	12,217.0		DIST. 3					
3/16/2000	12,685.0	12,699.0							
TUBING STRING									
Tubing Description	Run Date	Pull Date	String Length (ft)	Set Depth (ftKB)					
Tubing-water Injection	6/6/2012		7,423.06	7,449.1					
Comment									
Jts	Item Description	OD Nominal (in)	Nominal ID (in)	Wt (lbs/ft)	Grade	Make	Model	Len (ft)	Top (ftKB)
1	Tubing Hanger	3 1/2	2.992	9.30	J-55	WSI	T&C Upset	0.73	26.0
1	Tubing Joints (internally plastic coated - TK-99)	3 1/2	2.992	9.30	J-55	MAVE...	T&C Upset	32.52	26.7
1	Pup Joint (internally plastic coated - TK-99)	3 1/2	2.992	9.30	J-55	MAVE...	T&C Upset	6.17	59.3
227	Tubing Joints (internally plastic coated - TK-99)	3 1/2	2.992	9.30	J-55	MAVE...	T&C Upset	7,333.45	65.4
1	3.50" F-Profile Nipple, 2 560" ID	3 1/2	2.560	9.30	J-55	BAKER OIL TOOLS	T&C Upset	1.30	7,398.9
1	Tubing Joint (internally plastic coated) - TK-99	3 1/2	2.992	9.30	J-55	MAVE...	T&C Upset	32.51	7,400.2
1	Baker "Hornet" Retrievable Packer	6.276	2.992	9.30	J-55	BAKER OIL TOOLS	T&C Upset	8.00	7,432.7
1	3.50"-9.3#-J-55-8rd EUE Pup Jt	3 1/2	2.992	9.30	J-55	BAKER OIL TOOLS	T&C Upset	6.05	7,440.7
1	2.875" 8RD EUE X 3 50" 8RD EUE X-OVER	3 1/2	2.441	9.30	J-55	BAKER OIL TOOLS	T&C Upset	0.78	7,446.7
1	2.875" F-Profile Nipple 2.313" ID	2 7/8	2.313	6.50	J-55	BAKER OIL TOOLS	T&C Upset	1.00	7,447.5
1	Wireline re-entry guide	2 7/8	2.441	6.50	J-55	BAKER OIL TOOLS	T&C Upset	0.55	7,448.5



Wellsite Schematic

VASALY COM #2 SWD

API / UWI 3004529936		Surface Legal Location 022-030N-011W-B		Field Name WILDCAT #0900		License No.	Well Configuration Type
Ground Elevation (ft) 5,856.00	Orig KB/RT (ft) 5,882.00	KB-Grd (ft) 26.00	KB-CF (ft) 5,882.00	KB-TF (ft) 5,882.00	Other Elevation Type		Other Elevation (ft)

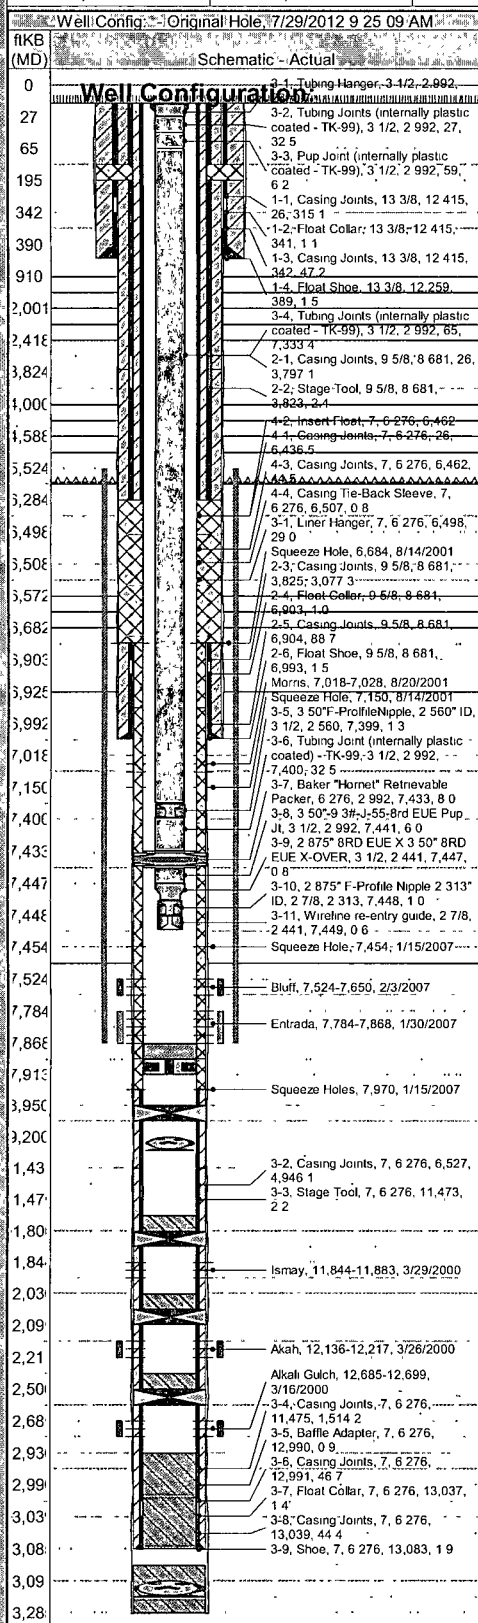

OTHER IN HOLE			
Run Date	Description	OD (in)	ID (in)
12/25/1999	Fish	5 3/4	
Top (ftKB)	Bottom (ftKB)	Make	Model
9,200.0	9,201.0		
Run Date	Description	OD (in)	ID (in)
1/7/2009	Fill	6 267	
Top (ftKB)	Bottom (ftKB)	Make	Model
7,868.0	7,908.0		
Run Date	Description	OD (in)	ID (in)
8/4/2009	Fish	8 1/2	
Top (ftKB)	Bottom (ftKB)	Make	Model
13,092.0	13,100.0		
Run Date	Description	OD (in)	ID (in)
2/1/2010	Cement Retainer	6.276	
Top (ftKB)	Bottom (ftKB)	Make	Model
7,908.0	7,913.0		
Run Date	Description	OD (in)	ID (in)
2/1/2010	Cast Iron Bridge Plug	6 276	
Top (ftKB)	Bottom (ftKB)	Make	Model
11,800 0	11,805.0		
Run Date	Description	OD (in)	ID (in)
2/1/2010	Cast Iron Bridge Plug	6.276	
Top (ftKB)	Bottom (ftKB)	Make	Model
12,090 0	12,095.0		
Run Date	Description	OD (in)	ID (in)
2/1/2010	Cast Iron Bridge Plug	6.276	
Top (ftKB)	Bottom (ftKB)	Make	Model
12,500 0	12,505 0		