State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-144 Revised June 6, 2013 below-grade tanks, and

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Below-Grade Tank, or	
Proposed Alternative Method Permit or Closure Type of action: Below grade tank registration Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed altern Modification to an existing permit/or registration Closure plan only submitted for an existing permitter	RCVD OCT 4'13 OIL CONS. DIV. DIST. 3
or proposed alternative method Instructions: Please submit one application (Form C-144) per individual pit, bel Please be advised that approval of this request does not relieve the operator of liability should operations resi	low-grade tank or alternative request
environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable.	e governmental authority's rules, regulations or ordinances.
Operator: ENERVEST DEENATING, L.L.C. OGRID#	·
Address: 1001 FANNIN ST., SVITE 800, HOUSTON, TX	77002
Facility or well name: JICANILLA APACHE TRIBAL 151 #4 API Number: 30-039-20605 OCD Permit Number:	1170.
API Number: OCD Permit Number:	9756
U/L or Qtr/Qtr C Section 3 Township 26N Range 5W	
Center of Proposed Design: Latitude 36.52160 Longitude -107. Surface Owner: Federal State Private Tribal Trust or Indian Allotment	NAD: [1927 P4 1983
	PIV DIST. 3
Pit: Subsection F, G or J of 19.15.17.11 NMAC	OIL CONS. DIV DIST. 3
Temporary: Drilling Workover	AUG 1 2 2013
Permanent Emergency Cavitation P&A Multi-Well Fluid Management	
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC	
☐ String-Reinforced	
Liner Seams: Welded Factory Other Volume:	bbl Dimensions: L x W x D
3. Below-grade tank: Subsection of 19.15.17.11 NMAC	
Volume: 95 bbl Type of fluid: PRODJCED WATER, COMPRE	
	INCIDENTAL WBRICATING DIL
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automati	
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☑ Other	ONITORING
Liner type: Thicknessmil	
4. Alternative Method:	
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Enviror	nmental Bureau office for consideration of approval.
5.	
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below	•
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 fe institution or church)	eet of a permanent residence, school, hospital,
Four foot height, four strands of barbed wire evenly spaced between one and four feet	

MAlternate. Please specify 42" HOL WIRE FENCE W/L STRANDS BARBED-WIRE ON TOP.

	···
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Netting Other	
Monthly inspections (If netting or screening is not physically feasible)	
5. Signs: Subsection C of 19.15.17.11 NMAC	
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
Signed in compliance with 19.15.16.8 NMAC	
8. Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	otable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☑ NA
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes 🔀 No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	Yes No
Within an unstable area. (Does not apply to below grade tanks) - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	Yes No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark).	☐ Yes 🗷 No
- Topographic map; Visual inspection (certification) of the proposed site	
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes 🗷 No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☐ No
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	i
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of	
initial application NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 No Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the document of the subsection of the following items must be attached to the application.	
attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.1 and 19.15.17.13 NMAC	
Previously Approved Design (attach copy of design) API Number: or Permit Number:	
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC	
Previously Approved Design (attach copy of design) API Number: or Permit Number:	

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the	documents are							
Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC								
Proposed Closure: 19.15.17.13 NMAC								
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	luid Management Pit							
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be closure plan. Please indicate, by a check mark in the box, that the documents are attached. ✓ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC ✓ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC ✓ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ✓ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ✓ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC								
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. P. 19.15.17.10 NMAC for guidance.								
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA							
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA							
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No							
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No							
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No							
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	Yes No							
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No							
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	□ Vas □ Na							
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	☐ Yes ☐ No							

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	
· I	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	
Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain. FEMA map	☐ Yes ☐ No
16,	
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17. Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	11 NMAC 15.17.11 NMAC
Operator Application Certification:	
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and beli	ief.
Name (Print): BART TREVING Title: REGULATORY ANALY	S T
Signature: Date: 8/8/15	
e-mail address: BTREVIND @ ENERVEST. NET Telephone: 713-659-3500	
18.	
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: OCD Permit Number:	/2013
OCD Representative Signature: Chath. Kelly Control Velly 10/192013 Approval Date: 8/21	the closure report.
OCD Representative Signature: Title: OCD Permit Number: OCD Permit Number: OCD Permit Number: OCD Permit Number: 19. Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed.	the closure report. complete this

22.	
Operator Closure Certification:	
I hereby certify that the information and attachments submitted with this closure repobelief. I also certify that the closure complies with all applicable closure requirement	
Name (Print): WYDEBT L GARDNER	Title: 5R 45E SPECIALIST.
Signature: MANK & Devolution	Date: $ $
e-mail address: NGARONER @ ENERVIEST - NEX	Telephone: 505 - 325 - 0318



New Mexico Office of the State Engineer Water Column/Average Depth to Water

No records found.

PLSS Search:

Township: 26N Range: 05W

EnerVest Operating, LLC (EV)

BELOW-GRADE TANK CLOSURE PLAN

Rule 19.15.17.13

Well Name – Jicarilla Apache Tribal 151-4 API # 30-039-20605 Location UL- C, Sec 3, T-26N, R-5W Lat: N 36.521160 Lat W -107.349100

Before June 15, 2013, EV shall close, retrofit, or replace an existing below-grade tank that has not demonstrated integrity.

EV shall close a below-grade tank within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.

A. EV shall close an existing below-grade tank that does not meet the requirements of Subsection I, paragraphs (1) through (4), of 19.15.17.11 NMAC if not retrofitted to comply with said requirements prior to any sale or change of operator to 19.15.9.9 NMAC.

Any below-grade tank installed prior to June 16, 2008 that is single walled and where any portion of the tank sidewall is below the ground surface and not visible shall equip or retrofit the below-grade tank to comply with paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, or close it, within 5 years after June 16, 2008.

Within 60 days of cessation of the permitted below-grade tanks operation or as required by Subsection B of 19.15.17.17 NMAC, EV shall close the below-grade tank in accordance with a closure plan that the appropriate division district office approves.

Below grade tank was removed on or about August 14. 2013

B. Prior to implementing any closure operations EV shall research county tax records to determine the name and address of the surface owner of the properties involved. EV shall notify this surface owner via Certified U.S. Mail, return receipt requested, of their intent to close said below-grade tank.

Upon determination, EV will notify the appropriate district office verbally and in writing at least 72 hours but not more than one week prior to beginning work. Such notice shall contain at a minimum the following:

Operators Name
Unit letter, Section, Township, & Range of well
Well name and well number
API Number of well

Enervest Operating provided 72 hour notification to the state of New Mexico and the Jicarilla Tribal Environmental Protection Officer per regulations. See attached notification and responses

- C. Within 60 days of completion of closure operations, EV will file Form C-144, with attachments, outlining the detailed operations of the closing operations. Such attachments shall include, but not limited to, proof of surface owner and division notifications, confirmation of sampling analysis, disposal facility names and permit numbers, soil backfilling and cover installation, re-vegetation application rates and seeding techniques, and photo documentations.
- D. All free standing liquids and sludge will be removed at the start of the below-grade tank closure process from the below-grade tank and disposed of in one of the below division-approved facility as indicated below:

TNT Land Farm Permit # NM-01-0008 Liquids & Sludge Environtech Land Farm Permit # NM-01-0011 Solids AguaMoss Permit # 247130 Liquids

EV will obtain prior approval from the division to dispose, recycle, reuse, or reclaim the below-grade tanks and provide documentation of the final disposition of the below-grade tank in the closure report.

All material in the below grade tank was removed and disposed of at the T-N-T Land Farm (#NM-01-008). The interior of the tank was steam cleaned prior to removal. The tank was transported to the Enervest Jicarilla yard where it was inspected and recoated. The tank will be utilized at another location in the future.

Existing liners that are removed as a result of closure will be wiped cleaned and disposed of at a solid waste facility listed below in compliance with Subparagraph (M) of Paragraph (I) of Subsection C 19.15.35.8 NMAC..

San Juan Regional Landfill Permit # SWM 052426 or Special Waster Permit # SWM052433 "sp"

If there is any on-site equipment associated with a below grade tank, EV shall remove the equipment, unless the equipment is required for some other purpose.

Upon removal of the below-grade tank, EV will take, at a minimum, a five point composite sample from where the tank was sitting. EV shall collect individual grab samples will be taken from any area that is wet, discolored or showing other evidence of a release. All samples will be analyzed for the following:

Constituent	Method	Groundwater 51-100 FT	Test Results
		10,000	40.3
Chloride	EPA 300.0	mg/kg	mg/kg
	EPA SW-846		
TPH	Method 418.1	2,500 mg/kg	291 mg/kg
	EPA SW-846		
	Method 8021B		Non-
BTEX	or8260B	50 mg/kg	Detect
	EPA -SW-846		
	Method 8021B or		Non
Benzene	8015M	10 mg/kg	Detect
	EPA SW-846		26.5
GRO/DRO	Method 8015B	1,000 mg/kg	mg/kg

The sample was analyzed by Envirotech Analytical Laboratory in Aztec NM. See attached laboratory report.

EV will insure that the results of all sampling shall be reported to the division on approved form C-141. EV understands that the division may require additional delineation upon review of the results.

If sampling demonstrates that concentrations specified above have NOT been exceeded, or that a release has NOT occurred, EV will backfill the excavation with compacted, non-waste containing, earthen material, construct a division prescribed soil cover, and recontour and re-vegetate the site. The division prescribed soil cover, recontouring, and re-vegetation shall comply with 19.15.17.13.

The excavation was back filled by Costilla Oil Field Services on September 5, 2013 utilizing soil that was already on location. The location was contoured to match the existing terrain. See attached photographs

If EV or the division determines that a release has occurred, EV shall fully comply with 19.15.29 NMAC and 19.15.30 NMAC as appropriate.

No release was observed. See the attached C-141 for details

E. Once EV has closed a below-grade tank, we shall reclaim the site to a safe and stable condition that blends with the surrounding undisturbed area. When possible, EV will restore the impacted surface area to the condition that existed prior to oil and gas operations by the placement of soil cover.

If the closed area is within the confines of the pad location EV will blend the site to match the pad location as much as possible. Such activities shall prevent erosion, protect fresh water, human health and the environment. EV will obtain written agreement from the surface owner for any alternate re-vegetation proposals and submit to the division for final approval.

The soil cover design will be consistent with the requirements of 19.15.17.13(H)(1) and (3). The soil cover will consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater. The soil cover will be constructed to the site's existing grade and prevent ponding of water and erosion of the cover material.

EV will seed the disturbed areas the first growing season after closing the below grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.

EV shall notify the division when it has seeded or planted and when it successfully achieves re-vegetation.

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Form C-141
Revised August 8, 2011
Submit 1 Copy to appropriate District Office in

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Submit 1 Copy to appropriate District Office in accordance with 19.15.29 NMAC.

			Rele	ease Notific	cation	and Co	orrective A	ction	l			
			Г	Initial	Report	x□	Final Repo					
Name of Co	mpany En	ervest Opera	ating			OPERATO Contact Le				<u> </u>		
Address 270	00 Farming	gton Ave B	uilding K	K, Suite #1			No. 505-325-03					
Facility Nar	ne Jicarill	a Apache Tr	ibal 151-	-4]	Facility Typ	e Oil & Gas Pro	oduction	n			
Surface Ow	ner Jicarill	a Tribe		Mineral (Owner J	icarilla Trib	oe		API No	. 30-039-	20605	
				LOCA	ATION	OF REI	LEASE					
Unit Letter C	Section 3	Township 26N	Range 5W	Feet from the	North/	South Line	Feet from the	East/V	Vest Line	County Rio Arri	ba	
		Lat	itude1	N. 36.521160	Lo	ongitude	W -107.349	9100				
				NAT	TURE	OF REL	EASE					
Type of Rele							Release None			Recovered		
Source of Re		2:0					Hour of Occurrence	ce	Date and	Hour of D	iscovery	·
Was Immedi	ate Notice C		Yes X	□ No □ Not		If YES, To	wnom?					
Required		_										
By Whom?						Date and I-	lour					
Was a Water	course Reac			□ N-		If YES, Vo	olume Impacting	the Wate	ercourse.			
	· · · · · · · · · · · · · · · · · · ·		Yes X		···						<u></u> _	
If a Watercou	urse was Im	pacted, Descr	ibe Fully.	*								
Describe Cau	ise of Proble	em and Reme	dial Actio	n Taken *								
				oint composite sa	mple was	s collect from	the excavation a	and subm	nitted analy	sis, the res	sults are	
		EPA Method										
		A Method 80										
		g (EPA 8015) arbons – 291 i		PA Method 418.1)							
		(EPA Method			. /							
Describe Are	a Affected	and Cleanup A	Action Tal	ken.*								
No release w												
								- <u>-</u> -				
				e is true and comp								
				nd/or file certain : ce of a C-141 rep								
				y investigate and								
or the enviro	nment. In a	ddition, NMC	OCD accep	ptance of a C-141								
federal, state	, or local lav	ws and/or regi	ulations.				OH CON	CEDU	ATION	DIVIO	IONI	
		~ I.	1	. 1)			OIL CON	<u>SER v</u>	ATION	ואוען	IUN	
Signature: \	MILL	2 Kler	ARIM	VI.								
	`	-	00	· O(Approved by	Environmental S	Specialis	t:			
Printed Nam	c. wildert i	U Garullei										
Title: Senior	HSE Specia	alist				Approval Da	te:		Expiration	Date:		
E-mail Addr	ess: wgardn	er@ enervest.	net			Conditions o	f Approval:			Attack	м П	
				1210		1				Attached []		
Date: 9-6	-2013	Phone:	<u>505-325-0</u>	1318								



Analytical Report

Report Summary

Client: Enervest Operating

Chain Of Custody Number: 15805

Samples Received: 7/9/2013 4:19:00PM

Job Number: 05123-0002 Work Order: P307029

Project Name/Location: 151-4 Pit

Entire Report Reviewed By:

Date: 7/11/13

Tim Cain, Laboratory Manager

Supplement to analytical report generated on: 7/11/13 10:56 am

The results in this report apply to the samples submitted to Envirotech's Analytical Laboratory and were analyzed in accordance with the chain of custody document supplied by you, the client, and as such are for your exclusive use only. The results in this report are based on the sample as received unless otherwise noted. Partial or incomplete reproduction of this report is prohibited, unless approved by Envirotech, Inc. If you have any questions regarding this analytical report, please don't hesitate to contact Envirotech's Laboratory Staff.





Project Name:

151-4 Pit

2700 Farmington Ave. Farmington NM, 87401

Project Number: Project Manager: 05123-0002 W Gardner

Reported: 11-Jul-13 14:45

Analyical Report for Samples

Client Sample ID	Lab Sample ID	Matrix	Sampled	Received	Container
151-4 Pit	P307029-01A	Soil	07/09/13	07/09/13	Glass Jar, 4 oz.





Project Name:

151-4 Pit

2700 Farmington Ave.

Project Number:

05123-0002

Reported: 11-Jul-13 14:45

Farmington NM, 87401

Project Manager:

W Gardner

151-4 Pit P307029-01 (Solid)

		Reporting							
Analyte	Result	Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
Volatile Organics by EPA 8021									
Benzene	ND	0.05	mg/kg	1	1328010	10-Jul-13	10-Jul-13	EPA 8021B	
Toluene	ND	0.05	mg/kg	1	1328010	10-Jui-13	10-Jul-13	EPA 8021B	
Ethylbenzene	ND	0.05	mg/kg	1	1328010	10-Jul-13	10-Jul-13	EPA 8021B	
p,m-Xylene	ND	0.05	mg/kg	1	1328010	10-Jul-13	10-Jul-13	EPA 8021B	
o-Xylene	ND	0.05	mg/kg	1	1328010	10-Jul-13	10-Jul-13	EPA 8021B	
Total Xylenes	ND	0.05	mg/kg	1	1328010	10-Jul-13	10-Jul-13	EPA 8021B	
Total BTEX	ND	0.05	mg/kg	1	1328010	10-Jul-13	10-Jul-13	EPA 8021B	
Surrogate: Bromochlorobenzene		96.2 %	80-	120	1328010	10-Jul-13	10-Jul-13	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		99.5 %	80-	120	1328010	10-Jul-13	10-Jul-13	EPA 8021B	
Surrogate: Fluorobenzene		99.8 %	80-	120	1328010	10-Jul-13	10-Jul-13	EPA 8021B	
Nonhalogenated Organics by 8015									
Gasoline Range Organics (C6-C10)	ND	4.99	mg/kg	1	1328011	10-Jul-13	10-Jul-13	EPA 8015D	
Diesel Range Organics (C10-C28)	26.5	4.99	mg/kg	1	1328011	10-Jul-13	10-Jul-13	EPA 8015D	
GRO and DRO Combined Fractions	26.5	4.99	mg/kg	1	1328011	10-Jul-13	10-Jul-13	EPA 8015D	
Total Petroleum Hydrocarbons by 418.1									
Total Petroleum Hydrocarbons	291	20.0	mg/kg	1	1328009	09-Jul-13	10-Jul-13	EPA 418.1	
Cation/Anion Analysis									
Chloride	40.3	10.0	mg/kg	1	1328015	10-Jul-13	10-Jul-13	EPA 300.0	





Project Name:

151-4 Pit

2700 Farmington Ave. Farmington NM, 87401

Project Number: Project Manager: 05123-0002 W Gardner **Reported:** 11-Jul-13 14:45

Volatile Organics by EPA 8021 - Quality Control

Envirotech Analytical Laboratory

	5 1	Reporting		Spike	Source	0/000	%REC		RPD	
Analyte	Result	Limit	Units	Level	Result	%REC	Limits	RPD	Limit	Notes
Batch 1328010 - Purge and Trap EPA 5030A							<u></u>			
Blank (1328010-BLK1)				Prepared: 0	9-Jul-13 A	nalyzed: 10)-Jul-13			
Benzene	ND	0.05	mg/kg			_				
Toluene	ND	0.05	"							
Ethylbenzene	ND	0.05	"							
p,m-Xylene	ND	0.05	"							
o-Xylene	ND	0.05	**							
Total Xylenes	ND	0.05	**							
Total BTEX	ND	0.05	"							
Surrogate: Bromochlorobenzene	51.3		ug/L	50.0		103	80-120			
Surrogate: 1,4-Difluorohenzene	53.3		"	50.0		107	80-120			
Surrogate: Fluorohenzene	52.8		"	50.0		106	80-120			
Duplicate (1328010-DUP1)	Sou	rce: P307025-	01	Prepared: 0	9-Jul-13 A	nalyzed: 10	0-Jul-13			
Benzene	ND	0.05	mg/kg		ND				30	
Toluene	ND	0.05	11		ND				30	
Ethylbenzene	ND	0.05	"		ND				30	
p,m-Xylene	ND	0.05	**		ND				30	
o-Xylene	ND	0.05	n		ND				30	
Surrogate: Bromochlorobenzene	51.1		ug/L	50.0		102	80-120			
Surrogate: 1,4-Difluorohenzene	51.7		"	50.0		103	80-120			
Surrogate: Fluorobenzene	51.6		"	50.0		103	80-120			
Matrix Spike (1328010-MS1)	Sou	rce: P307025-	01	Prepared: 0	9-Jul-13 A	.nalyzed: 10	0-Jul-13			
Benzene	54.0		ug/L	50.0	0.24	107	39-150			
Toluene	53.5		"	50.0	0.44	106	46-148			
Ethylbenzene	52.6		"	50.0	0.36	105	32-160		•	
p,m-Xylene	106		**	100	0.81	105	46-148			
o-Xylene	52.7		11	50,0	0.77	104	46-148			
Surrogate: Bromochlorobenzene	52.1		"	50.0		104	80-120			
Surrogate: 1,4-Difluorobenzene	52.5		"	50.0		105	80-120			
Surrogate: Fluorobenzene	52.6		n	50.0		105	80-120			





Enervest Operating 2700 Farmington Ave. Farmington NM, 87401 Project Name:

151-4 Pit

Project Number:

05123-0002

Reported:

Project Manager:

W Gardner

11-Jul-13 14:45

Nonhalogenated Organics by 8015 - Quality Control

Envirotech Analytical Laboratory

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch 1328011 - GRO/DRO Extraction	on EPA 3550C						_		•	
Blank (1328011-BLK1)				Prepared:	09-Jul-13 A	nalyzed: 10	0-Jul-13			
Gasoline Range Organics (C6-C10)	ND	4.99	mg/kg							_
Diesel Range Organics (C10-C28)	ND	4.99	**							
GRO and DRO Combined Fractions	ND	4.99	"							
Duplicate (1328011-DUP1)	Sour	ce: P307025-	01	¹ Prepared:	09-Jul-13 <i>A</i>	nalyzed: 10	0-Jul-13			
Gasoline Range Organics (C6-C10)	22.5	4.99	mg/kg		24.0			6.50	30	
Diesel Range Organics (C10-C28)	24.1	4.99	n		27.0			11.4	30	
Matrix Spike (1328011-MS1)	Sour	Source: P307025-01		Prepared:	09-Jul-13 A	nalyzed: 10	0-Jul-13			
Gasoline Range Organics (C6-C10)	290	5.26	mg/kg	263	24.0	101	75-125			
Diesel Range Organics (C10-C28)	289	5.26	11	263	27.0	99.4	75-125			





Project Name:

151-4 Pit

2700 Farmington Ave. Farmington NM, 87401

Project Number: Project Manager: 05123-0002 W Gardner Reported: 11-Jul-13 14:45

Total Petroleum Hydrocarbons by 418.1 - Quality Control

Envirotech Analytical Laboratory

	Reporting			Spike	Source		%REC		RPD		
Analyte	Result	Limit Units		Level	Result	%REC	Limits	RPD	Limit	Notes	
Batch 1328009 - 418 Freon Extraction								.=			
Blank (1328009-BLK1)		Prepared &	Analyzed:	09-Jul-13							
Total Petroleum Hydrocarbons	ND	20.0	mg/kg								
Duplicate (1328009-DUP1)	Source: P306143-03RE1			Prepared &	Analyzed:	09-Jul-13					
Total Petroleum Hydrocarbons	98400	2000	mg/kg		76300			25.3	30		
Matrix Spike (1328009-MS1)	Sour	Source: P306143-03RE1			Analyzed:	09-Jul-13					
Total Petroleum Hydrocarbons	89900	2000	mg/kg	2000	76300	682	80-120			SPK1	





Project Name:

151-4 Pit

2700 Farmington Ave. Farmington NM, 87401

Project Number:

05123-0002

Project Manager:

W Gardner

Reported: 11-Jul-13 14:45

Cation/Anion Analysis - Quality Control

Envirotech Analytical Laboratory

		Reporting		Spike	Source		%REC		RPD	
Analyte	Result	Limit	Units	Level	Result	%REC	Limits	RPD	Limit	Notes
Batch 1328015 - Anion Extraction EPA 300.0								· · · ·		
Blank (1328015-BLK1)				Prepared &	Analyzed	10-Jul-13				
Chloride	ND	9.99	mg/kg							
Duplicate (1328015-DUP1)	Source: P307029-01			Prepared &	Analyzed:	10-Jul-13				
Chloride	35.6	10.0	mg/kg		40.3		·	12.5	30	





Project Name:

151-4 Pit

2700 Farmington Ave. Farmington NM, 87401

Project Number: Project Manager: 05123-0002 W Gardner Reported: 11-Jul-13 14:45

Notes and Definitions

SPK1 The spike recovery for this QC sample is outside of control limits.

DET Analyte DETECTED

ND Analyte NOT DETECTED at or above the reporting limit

NR Not Reported

dry Sample results reported on a dry weight basis

RPD Relative Percent Difference



CHAIN OF CUSTODY RECORD

15805

Client:			Project Name / Location:						ANALYSIS / PARAMETERS													ľ							
ENERVEST			151=4 PTT													,							J						
Email results to:	7	१हर	Sampler Name:						5)	21)	6												L						
WGARDNERQE	NERVE	<u> </u>	L. GARDNER						801	80	826	S				,				ļ									
Client Phone No.:	•		Client No.:						po	tt tt	B	etal	noic		불	96	=	ш	 	1		히	i						
505-320-792	4		05123-0002					ŀ	Wet	(Me	Met	8 8	<u>کر</u>	<u>۲</u>	<u>۲</u>				with	鲁	118	8		1		0 E	:		
Sample No./ Identification	Sample Date	Samp Time	i Lab No.	No./Volume of Containers		Preservative HNO ₃ HCI		TPH (Method 8015)	BTEX (Method 8021)	VOC (Method 8260)	RCRA 8 Metals	RCRA	RCRA	Cation / Anion	Cation	<u>5</u>	<u>당</u>	짍	RC	교	TCLP with H/P	CO Table 910-1	TPH (418.1)	CHLORIDE				Sample Cool	
151-4 PT	2/9/13	10:3	9 1307629-01	1-	ч%				χ	×							×	X			<u></u>	YY							
																					\downarrow	\perp							
																				_	\bot		_						
																					+	\perp							
										-											\downarrow	\perp	4						
						+		-				_									+		_						
			-																	_	+	\perp	-						
				 		-		-													\perp	\dashv	-						
		-						_						_							+	_	$\frac{1}{2}$						
			<u></u>									Ļ											╛						
Relinquished by: (Signature)				Date	Time	Recei	ved b	y: (Się	gnati	re)			•								ate	Time	- 1						
Shendery				della	16:19			_	/			, •	1							7/9	/13	1019	2						
Relinquished by: (Signature)					```	Recei	ved by	y: (Siç	gnatu	ire)									-										
Sample Matrix			-													<u> </u>				十	\exists		1						
Soil Solid Sludge	Aqueous 🗌	Other	D																										
☐ Sample(s) dropped off after	hours to sec	cure drop	o off area.	∌ €	N V Ana	irc) † (e C	h]						_													
5795 US Highway 64	4 • Farmingto	on, NM 8	7401 • 505-632-0615 • 1	hree Spr	ings • 65 N	Mercac	lo Stre	et, Su	ite 1	15, Du	urang	jo, C	0 813	01 •	labor	atory	@en	virote	ch-ind	.com									

Gardner, Wilbert

From:

Gardner, Wilbert

Sent:

Thursday, August 29, 2013 8:29 AM

To: Cc: 'Kelly, Jonathan, EMNRD'; 'Hobson Sandoval'

CC:

Cross, Jeff; Deal, Chester; Trevino, Bart

Subject:

Enervest Operating 72 Hour Notification of BGT Excavation Closure

Attachments:

Soil Test Results 151-4.pdf

Expires:

Saturday, December 07, 2013 12:00 AM

Tracking:

'Kelly, Jonathan, EMNRD'

'Hobson Sandoval'

Cross, Jeff
Deal, Chester
Trevino, Bart

Recipient

Delivery

Delivered: 8/29/2013 8:29 AM Delivered: 8/29/2013 8:29 AM

Delivered: 8/29/2013 8:29 AM

Gentlemen:

Enervest Operating is planning on closing the below grade tank containment for the Jicarilla Apache Tribal 151-4 on September 5, 2013 starting at approximately 9:00 AM.

The API number for the site is 30-039-20605. The legal description for the site is UL-C, Sec 3, T-26N, R-5W.

Attached is a copy of the soil test results for your review.

Thank you.

Lee Gardner CHMM, CSP
Sr. HSE Specialist
Enervest Operating LLC
2700 Farmington, Bldg K, Suite #1
Farmington, NM 87401
Office 505-325-0318 Ext 13
Mobile 505-320-7924
Wgardner@enervest.net

Gardner, Wilbert

From:

Microsoft Outlook

To:

Kelly, Jonathan, EMNRD; Hobson Sandoval

Sent:

Thursday, August 29, 2013 8:29 AM

Subject:

Relayed: Enervest Operating 72 Hour Notification of BGT Excavation Closure


Delivery to these recipients or distribution lists is complete, but delivery notification was not sent by the destination:


Kelly, Jonathan, EMNRD


Hobson Sandoval

Subject: Enervest Operating 72 Hour Notification of BGT Excavation Closure


Sent by Microsoft Exchange Server 2007

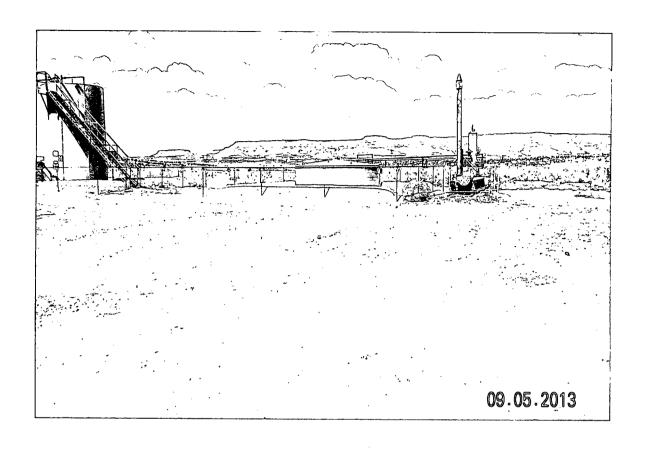


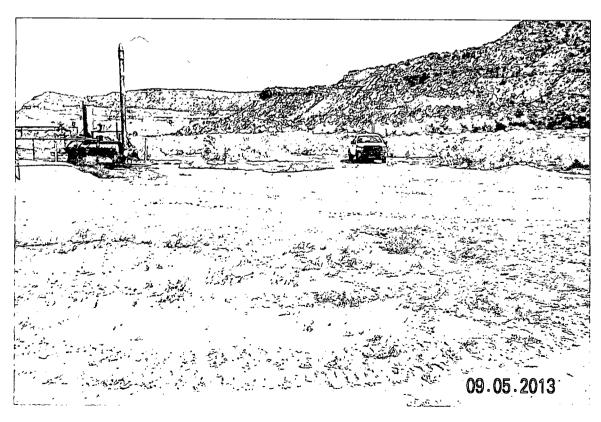


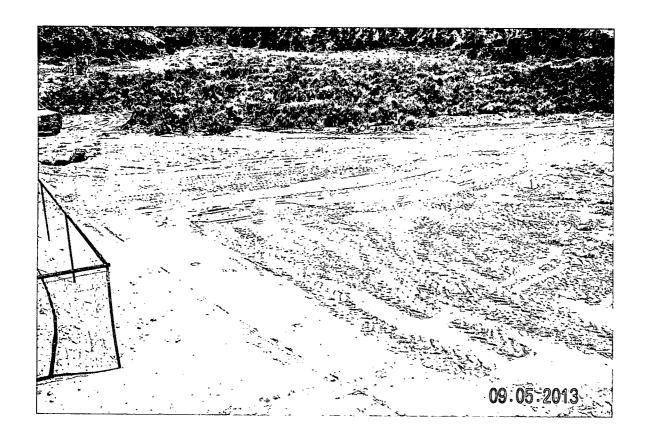




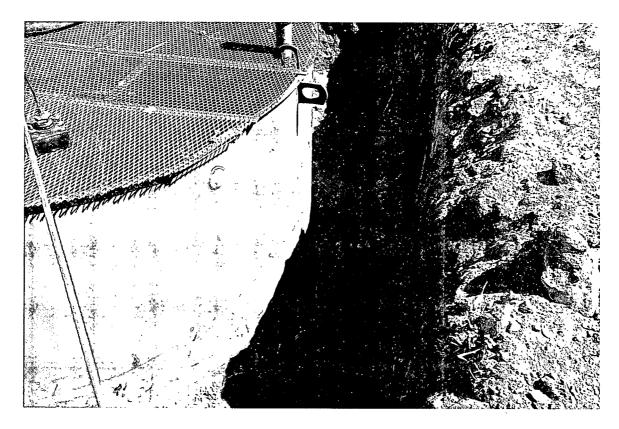

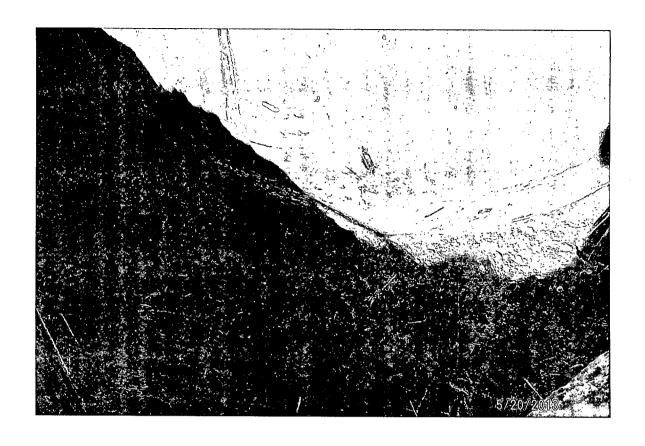

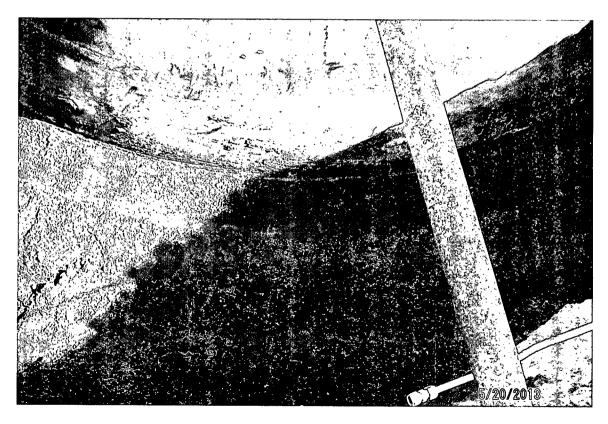

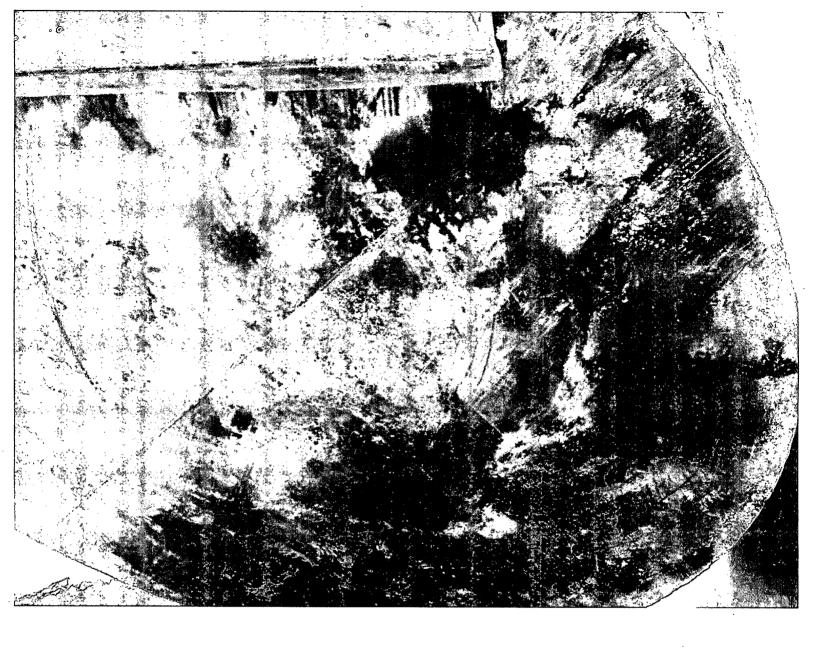

•
•
•