

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS  
NORTHWESTERN NEW MEXICO  
(Submit 3 Copies to OCD Aztec Office)

MA-7

3585

Operator: BLACKWOOD & NICHOLS CO. Location: Unit N, Sec. 16, Twp 31N, Rng 7W.

Name of Well/Wells or Pipeline Serviced NEBU 504 30-045-27991

Elevation 6500' Completion Date 10-9-93 Total Depth 350' Land Type\* Surface: S Mineral: E-178-1

Casing, Sizes, Types & Depths 8-5/8" SCH 40 P.V.C. - 100', 7-7/8" Open Hole

If Casing is cemented, show amounts & types used 20 sks Portland Zia I-II

If Cement or Bentonite Plugs have been placed, show depths & amounts used N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. No water sample.

Depths gas encountered: N/A

RECEIVED  
NOV 23 1993

Type & amount of coke breeze used: Asbury Flo-Coke, 4,150# OIL CON. DIV. J  
DIST. 3

Depths anodes placed: 175' - 285' (10)

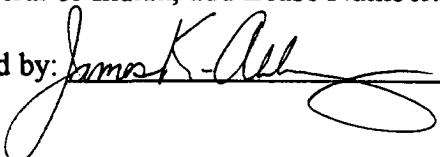
Depths vent pipes placed: Bottom to 4' Above Ground Level

Vent pipe perforations: Bottom - 240'

Remarks: Groundbed located 138° SE - North and 152' from NEBU 504 wellhead.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

\*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.  
If Federal or Indian, add Lease Number.

Signed by: 

Title: Operations Engineer Date: 11/19/93

BLACKWOOD & NICHOLS  
CATHODIC GROUND BED  
DRILLERS REPORT

P# MA-7 WELL# NEBU#504

S 16 T 3 N R 2

DEPTH	STRATA	NOTES	DEPTH	STRATA	NOTES
5'	F12H ↓ D18H				
10'					
15'					
20'					
25'					
30'					
35'					
40'					
45'					
50'					
55'					
60'	H				
65'	L				
70'	A				
75'	H				
80'	G				
85'					
90'					
95'					
100'	↓				

DRILLER Gerse Martiny

INSPECTOR Joe Matyssek

# CATHODIC GROUND BED DRILLERS REPORT

MA-7 WELL# N.E.B.U. # 504

N S 14 T 31 -

[illegible]

LER \_\_\_\_\_

INSPECTOR *WOM*