

4868

30-045-11026

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 4 Twp 31 Rng 10

Name of Well/Wells or Pipeline Serviced SCOTT #6

cps 447w

Elevation 5974' Completion Date 7/20/63 Total Depth 155' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 132', 122', 112', 102', 96', 86'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gab #1 155' OF SCRAP TUBING. ANODES INSTALLED 7/21/65. BELEIVE PIPE IS

SEPARATED AT 132'-COULD NOT GET ANODE PAST .

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
MAY 31 1991
OIL CON. DIV
DIST. 3

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 7-20-63

WELL NAME SCOTT #6 CPS NO. 447-W

LOCATION H-31N-10W

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 155'

TOTAL DRILLING RIG TIME 15 1/2 hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED _____

NUMBER SACKS MUD USED 5

NUMBER SACKS LOST CIRCULATION MAT'L USED 1

ANODE DEPTHS #1 _____, #2 _____, #3 _____, #4 _____

TOTAL LBS. COKE USED _____

ANODE OUTPUTS _____ VOLTS, #1 _____, #2 _____, #3 _____, #4 _____

TOTAL CIRCUIT RESISTANCE: VOLTS 6.5 AMPERES 10.0 OHMS .65-2

NUMBER FEET SURFACE CABLE ~~GENDITT~~ 297'

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).

REMARKS: Static $\eta_s = .65R$ 600 E


Installed Good - All Rect 40V 12A Ser # 62C6382

Installed Scrap Tubing Gd. Bed 155'

ALL CONSTRUCTION COMPLETED

E. Paahl
SIGNATURE

GROUND BED LAYOUT SKETCH

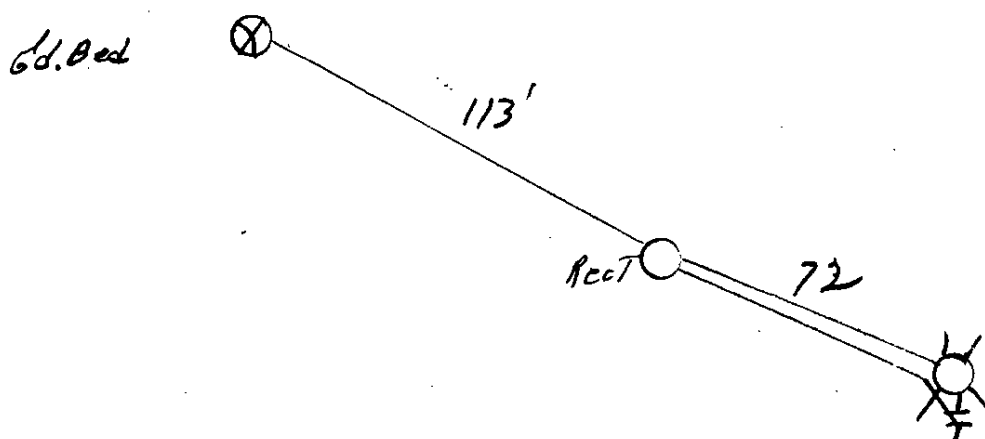

ORIGINAL & 1 COPY
ALL REPORTS

347'

日本

[illegible]

Company Secretary

111

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 7-21-65

Well Name <u>Scott #6</u>			CPS No. <u>447W</u>		
Location <u>SW² 4-31-10</u>			Work Order No. <u>52453</u>		
Anode Hole Depth <u>155'</u>	Total Drilling Rig Time <u>3 Hrs.</u>	Type & Size Bit Used		No. Sacks Mud Used	
No. Sacks Lost Circulation Mat'l Used	Anode Depth	# 1	# 2	# 3	# 4
		<u>132</u>	<u>122</u>	<u>112</u>	<u>102</u>
Total Lbs. Coke Used	Anode Output (Volts)	# 5	# 6	# 1	# 2
		<u>96</u>	<u>86</u>		
Total Circuit Resistance	No. Ft. Surface Cable Conduit				
Volts	Amps	Ohms			

Drilling Log (Attach Hereto). ☐

Remarks: Wash out Pipe G.B. - to 155'
Could not Get Anodes past 132 - Believe
Pipe is seperated at this depth
Bottom ~~Anode~~ string of 4 Anodes
Top string of 2 Anodes

Construction Completed

Donela
(Signature)

GROUND BED LAYOUT SKETCH

