

46 = 30-039-07889
437 = 30-039-24275 4460

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 11 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #46, #437

cps 187w

Elevation 6305 Completion Date 4/26/63 Total Depth 130' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A


Type & amount of coke breeze used: 850 lbs.

Depths anodes placed: 110', 104', 98', 92', 86'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

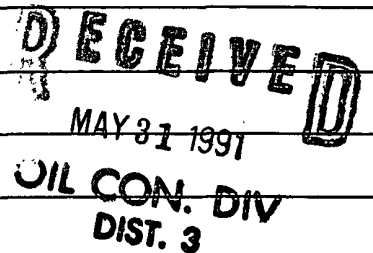

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 26 April 1963

WELL NAME Abraham No. 1-D-30-6#46 CPS NO. 187 W

LOCATION NE⁴ Sec. 11 T 30 N R 6 W

WORK ORDER NUMBER 18940542-50-02

ANODE HOLE DEPTH 130

TOTAL DRILLING RIG TIME 8 Hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED 6 1/4 Rock 1553 x

NUMBER SACKS MUD USED 6

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS: #1 110, #2 104, #3 98, #4 92 #5 86

TOTAL LBS. COKE USED 850 lbs (10 sacks)

ANODE OUTPUTS: 12.2 VOLTS, #1 2.3, #2 3.2, #3 3.4, #4 3.3 #5 3.2

TOTAL CIRCUIT RESISTANCE: VOLTS 11.8 AMPERES 7.2 OHMS 1.63 Ω

NUMBER FEET SURFACE CABLE CONDUIT 220

DRILLING LOG (ATTACH HERETO).


FORMATION LOG (ATTACH HERETO).

REMARKS: Static ϕ s 82 R 600 NE
Good All Rectifier 28 V 12A Serial/No.

ALL CONSTRUCTION COMPLETED

Donnels
SIGNATURE

GROUND BED LAYOUT SKETCH

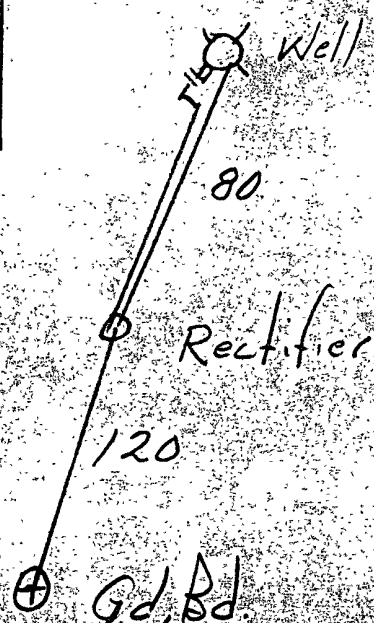

ORIGINAL & 1 COPY
ALL REPORTS

490'

ABRHAM No. 1-D

DAILY DRILLING REPORT

LEASE 5611 7300 1-60 WELL NO. CONTRACTOR *J.E. Wilson* RIG NO. *D-6* REPORT NO. DATE *April 25 & 26, 1962*

MORNING						DAYLIGHT						EVENING																			
Driller		Total Man in Crew		FORMATION		WT. BIT		R.P.M.		Driller		Total Man in Crew		FORMATION		WT. BIT		R.P.M.		Driller		Total Man in Crew		FORMATION		WT. BIT		R.P.M.			
FROM	TO										FROM	TO									FROM	TO									
0	10			64 1/2	dg	1031					10	82			55 1/2	dg	1531														
10	20			55 1/2	dg	1					10	130			55 1/2	dg	1														
20	45			55 1/2	dg	1					10	130			55 1/2	dg	1														
45	70			55 1/2	dg	1																									
TYPE		NO. DC		SIZE		LENG.				TYPE		NO. DC		SIZE		LENG.				TYPE		NO. DC		SIZE		LENG.					
SIZE		STANDS		SINGLES						SIZE		STANDS		SINGLES						SIZE		STANDS		SINGLES							
DOWN ON KELLY		TOTAL DEPTH								DOWN ON KELLY		TOTAL DEPTH								DOWN ON KELLY		TOTAL DEPTH									
MAKE		MUD RECORD		MUD ADDITIVES USED AND RECEIVED						MAKE		MUD RECORD		MUD ADDITIVES USED AND RECEIVED						MAKE		MUD RECORD		MUD ADDITIVES USED AND RECEIVED							
TIME		WT.		VIS.						TIME		WT.		VIS.						TIME		WT.		VIS.							
FROM		TO		TIME BREAKDOWN						FROM		TO		TIME BREAKDOWN						FROM		TO		TIME BREAKDOWN							

6 inch water

total dig time 8 hrs

REMARKS: Drilled 20' used 3 mud / sand water. This
 April 25 - Drilled 30' used 3 mud / sand water 5 hrs
 April 26 - Drilled 20' used 3 mud / sand water 5 hrs
 Arrived at rig 12:00 PM muddy roads

REMARKS: moving to new location

SIGNED: Toolpusher

Company / Stamp etc

St. Andrews