

#1 → 30-039-07330

4908

#60 → 30-039-07341

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 29 Twp 28 Rng 5

Name of Well/Wells or Pipeline Serviced SAN JUAN 28-5 UNIT #1, #60

cps 729w

Elevation 6708' Completion Date 4/26/66 Total Depth 280' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 4500 lbs.

Depths anodes placed: 225', 219', 205', 195', 189', 183', 150', 144', 138'

Depths vent pipes placed: 225' OF 3/4" HOSE

Vent pipe perforations: 225'

Remarks: qb #1

RECEIVED

MAY 31 1991.

OIL CON. DIV.

DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

80' With #6 Drag Bit 4 3/4"

Date 4-26-66


Well Name SJU 28.5 #1 ^{MY} & SJU 28.5 #60 ^{OK}				CPS No. 729W			
Location NE 29-28-5				Work Order No. 189-52368-50-20 54288			
Anode Hole Depth 280	Total Drilling Rig Time 14 1/2 Hrs	Type & Size Bit Used 7 7/8 - 240645 = 280		No. Sacks Mud Used 1			
No. Sacks Lost Circulation Mat'l Used 0	Anode Depth		#1 225	#2 219	#3 205	#4 195	#5 189
Total Lbs. Coke Used 4500		Anode Output (Volts)		#1 4.7	#2 4.5	#3 3.3	#4 4.0
Total Circuit Resistance Volts 12.2		Amps 13.5	Ohms 0.9	No. Ft. Surface Cable Conduit 1963' on Anodes			
				7 150	8 144	9 138	10 NO
				7 5.1	8 5.4	9 5.6	10 NO

Drilling Log (Attach Hereto). ☐

Remarks: Static R's 600' N #1 = .76 - 600' W #60 = .72

3/4" Plastic Hose to No. 1 Anode. With Perforations oppsite Anode's
10 lb Chemical Added to Water & Pumped thru. Hole

Good All Rectifier 30-20, 3NE6. Ser. No. 65C6667

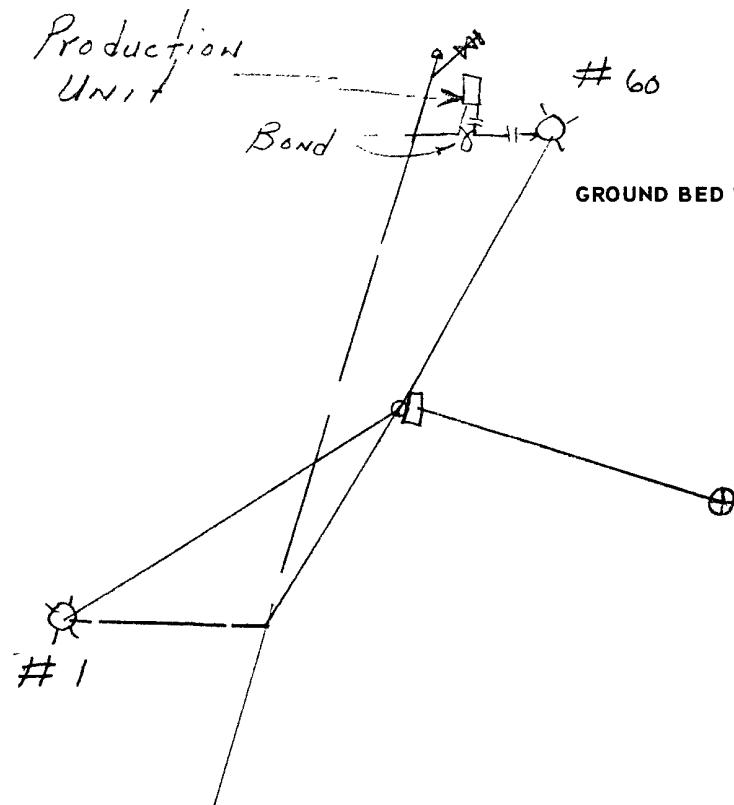

GROUND BED LAYOUT SKETCH

All Construction Completed

Arrels
(Signature)

1963'
1210'
3173' TOTAL #8 W/A
N

