

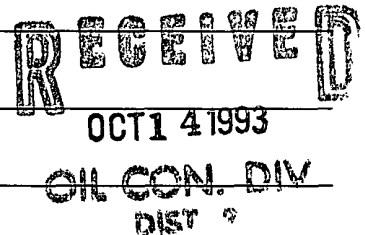
DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS SN-17

NORTHWESTERN NEW MEXICO
(Submit 3 Copies to OCD Aztec Office)

30-039-21736

Operator: BLACKWOOD & NICHOLS CO. Location: Unit F, Sec. 3, Twp 30N, Rng 7W.Name of Well/Wells or Pipeline Served NEBU 102AElevation 6175± Completion Date 6-22-93 Total Depth 330' Land Type* Surface: F Mineral: SF-079001ACasing, Sizes, Types & Depths 8-5/8" SCH 40 P.V.C. - 100' 7-7/8" Open HoleIf Casing is cemented, show amounts & types used 24 sks Portland Zia I-IIIf Cement or Bentonite Plugs have been placed, show depths & amounts used N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. Clear, Fresh 250', no sample taken.Depths gas encountered: N/AType & amount of coke breeze used: 88 50# sx Asbury GraphiteDepths anodes placed: 160' - 170' - 181' - 190' - 202 - 209' - 219' - 233' - 275' - 310'Depths vent pipes placed: 330' to surfaceVent pipe perforations: 330' to 110'Remarks: H₂O Fresh @ 250'.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.

If Federal or Indian, add Lease Number.

Signed by: James K. AllenTitle: Operations Engineer Date: 10/12/93

BLACKWOOD & NICHOLS CATHODIC GROUND BED DRILLERS REPORT

CP# SN17 WELL# 102A

6-22-93
S 3 T 30N R 7

[illegible]

DRILLER

INSPECTOR