

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐		7. UNIT AGREEMENT NAME None <i>Charles M. Goad</i>
2. NAME OF OPERATOR Charles M. Goad d/b/a Gola Oil Co.		8. FARM OR LEASE NAME Charles M. Goad <i>Gola</i>
3. ADDRESS OF OPERATOR 11912 Euclid Crt. NE, Albuquerque, New Mexico		9. WELL NO. 6 Gola
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 1790 FWL, 2234 FNL, Sec. 4 T17N-R3W		10. FIELD AND POOL, OR WILDCAT S. San Luis Mesa Verde
14. PERMIT NO.		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 4, T17N-R3W
15. ELEVATIONS (Show whether DF, RT, GR, etc.) 6420 GR		12. COUNTY OR PARISH Sandoval
		13. STATE N.M.

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☒

REPAIR WELL ☐

(Other) **First Report**

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

ABANDON* ☐

CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐

FRACTURE TREATMENT ☐

SHOOTING OR ACIDIZING ☐

(Other) ☐

REPAIRING WELL ☐

ALTERING CASING ☐

ABANDONMENT* ☐

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*



Spud date 10-24-63 Drilled a 6 1/2" hole to a depth of 370', set 356' of 4" I.D. 9 lb casing. On 10-31-63 cemented casing by circulating 40 sacks of type 1 cement & held under pressure for 48 hours. On 11-8-63 perforated as follows:

68 to 82' w/56 holes
98 to 110' w/48 holes
144 to 148' w/16 holes
196 to 206' w/40 holes
316 to 340' w/96 holes

Plan to Acidize 11-16-63

No electric logging or coring has been done

(Over)

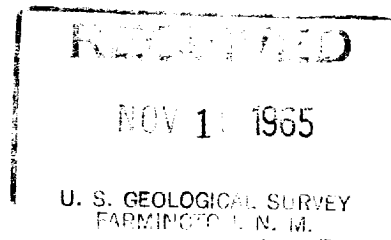

18. I hereby certify that the foregoing is true and correct

SIGNED

Charles M. Goad

TITLE

Operator

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

U.S. GOVERNMENT PRINTING OFFICE: 1963—O-685229
987-951

0-35	Shale
35-60	Shale & Sand
60	Shale & coal
61-68	Shale, grey bentonitic
* 68-82	Sand, grey-white, free oil
83-98	Shale, sandy, bentonitic
* 98-110	Sand, grey-white, free oil
110-125	Sand, grey-white, porous, faint odor, scattered fluorescence
125-144	Shale
* 144-148	Bentonitic sand, white-grey, fluorescence, free oil
148-196	Shale, grey-dark grey
* 196-206	Sand, grey, odor, bright yellow fluorescence, free oil
206-290	Shale
290-315	Sand & shale
315-316	Shale
* 316-340	Sand, grey-white, free oil
340-370	Shale
370	T.D.