

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☐ well other ☐
2. NAME OF OPERATOR
DOME PETROLEUM CORPORATION
3. ADDRESS OF OPERATOR 501 Airport Drive
Suite 107, Farmington, NM 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1660' FSL, 1980' FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ADDITIONS TO APD ☐

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐
☐

RECEIVED

FEB 6 1980

U. S. GEOLOGICAL SURVEY
FARMINGTON, N. M.

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. Attached is schematic diagram of BOP showing size API series. BOP will be tested to 500 psi before drilling out from under surface pipe. Pipe rams checked daily. Blind rams checked on trips.
2. Grade of the proposed casing strings is H40 & K55.
3. Type of cement used on production string: 2 stage Class G. Pozmix with 4% gel & 10% Gilsonite/sk. Followed with 10% salt.
4. The geologic name of the surface formation is Animas.
5. Estimated tops: Pictured Cliff 1445, Chacra 1825, Menefee 1925, Lookout 3745, Mancos 3945, Gallup 4825.
6. Gas & oil expected in Chacra & Gallup respectively. Formations probably Subsurface Safety Valve: Manu. and Type water bearing. Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED H.D. Hollingsworth
H.D. HOLLINGSWORTHTITLE DRILLING & PROD. FOREMAN

(This space for Federal or State office use)

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

TITLE _____

DATE _____


*See Instructions on Reverse Side

JAMES F. SIMS
DISTRICT ENGINEER

NMOCC

RECEIVED
FIR 2
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE



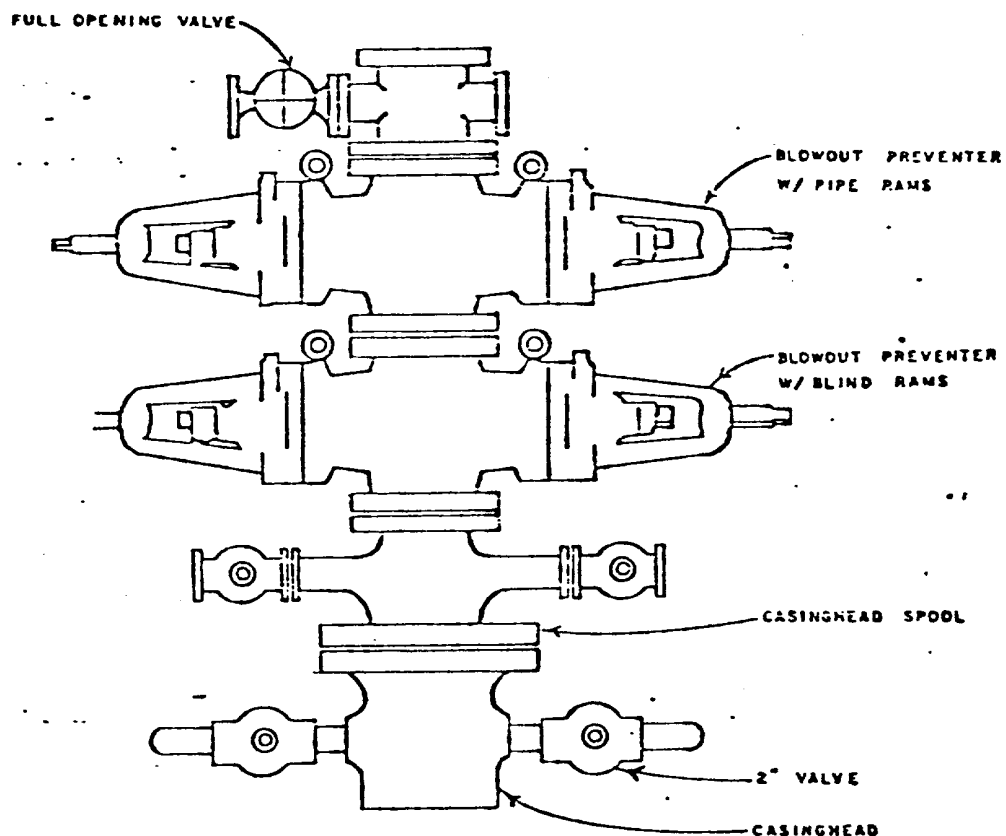

DOME PETROLEUM CORP.

SUITE 1500, COLORADO STATE BANK BLDG.

1600 BROADWAY

DENVER, COLORADO 80202

STANDARD BLOWOUT PREVENTER ASSEMBLY
900 SERIES

10"