

PLUGGING PROCEDURE

Lobo Production Co.
Gulf State 36-1
A-36-23N-06W
30-043-20660

Presumed downhole conditions and equipment
See attached schematic

Pull all production equipment and nipple up BOP

1. Go in hole with tbg. and set a plug from PBTD of 5557 ft. to 4980 ft. WOC & tag cement.
2. Load hole with 8.4 lb. 40 visc. Mud and test casing.
3. Pull tbg. To 4200 ft. and spot a plug from 4200 ft to 3940 ft.
4. Pull tbg. To 1980 ft. And spot a plug from 1980 ft. To 1365 ft.
5. Pull tbg. To 260 ft. And spot a plug from 260 ft. To surface
6. Top off csg. with cement and set a dry hole marker.
7. Restore location .

		INJECTION			PRODUCTION					DISPOSITION OF OIL, GAS, AND WATER						
7 POOL NO. AND NAME Property No. and Name Well No. & U-I-S-T-R API No.,	8 C O D E 1	9 Volume	10 Pressure	11 C O D E 2	12 Barrels of oil/conden- sate produced	13 Barrels of water produced	14 MCF Gas Produced	15 Days Prod- uced	16 C O D E 3	17 Point of Disposition	18 Gas BTU or Oil API Gravity	19 Oil on hand at beginning of month	20 Volume (Bbls/mcf)	21 Transporter OGRID	22 C O D E 4	23 Oil on hand at end of month
<u>55610 SCHARB BONE SPRINGS</u> 003468 Jackson 5 001 F - 05 - 19S - 35E 30 - 025 - 28574 002 G - 05 - 19S - 35E 30 - 025 - 28783	P				168	11	444	30	0	0850010 0850030	35.5 1764	357	176 414 30 11	012852 009171	U	349
003497 State AZ 002 H - 06 - 19S - 35E 30 - 025 - 28189	P				119	1190	15	29	0	0853610 0853630 0853650	1288	156	15 1035	024650		275
<u>56050 SHOE BAR PENNSYLVANIAN</u> 003455 Eidson A WN 003 L - 26 - 16S - 35E 30 - 025 - 02796 004 K - 26 - 16S - 35E 30 - 025 - 21821	S P				0 258	0 8	0 2872	0 30	0 0	0853710 0853730 0853750	38.5 1349	430	464 2872 8	012816 024650		224

OPERATOR LOBO PRODUCTION CO.		PROPERTY NAME GULF STATE		WELL NO. 36 #1
DATE 7-28-95	LOCATION ULSTR) A-36-23N-06W	FOOTAGE 850 FNL & 800 FEL		
API NO. 30-043-20660		POOL GALLUP		

Tops		
OJO ALAMO	1415 FT.	
PICTURE CLIFF	1930 FT.	
CHACRA		
CLIFF HOUSE	3990 FT.	
PT. LOOKOUT	4152 FT.	
MANCOS	4370 FT.	
GALLUP	5037 FT.	


CASING RECORD:
 8 5/8 24# 210 FT. 12 1/4 hole
 200 sxs, Calc. Surf.
 4 1/2 10.5 5605 FT. 7 7/8 hole
 DV TOOL 4300 FT.

1ST. STAGE 230 SXS. CLASS B , 6 1/4 # GILSONITE ,
 8# SALT, 1/4 FLOCELE & 2 % Ca Cl. Calc. cinc ,

2ND. STAGE 700 SXS. 65/35 POZ. W/ 67. GEL. , 10 LB.
 GILSONITE & 50 SXS. CLASS B NEAT Calc. surf.

PERFS. 5378 FT.- 5470 FT.
 5040' - 5300'

PBTD 5557 FT.

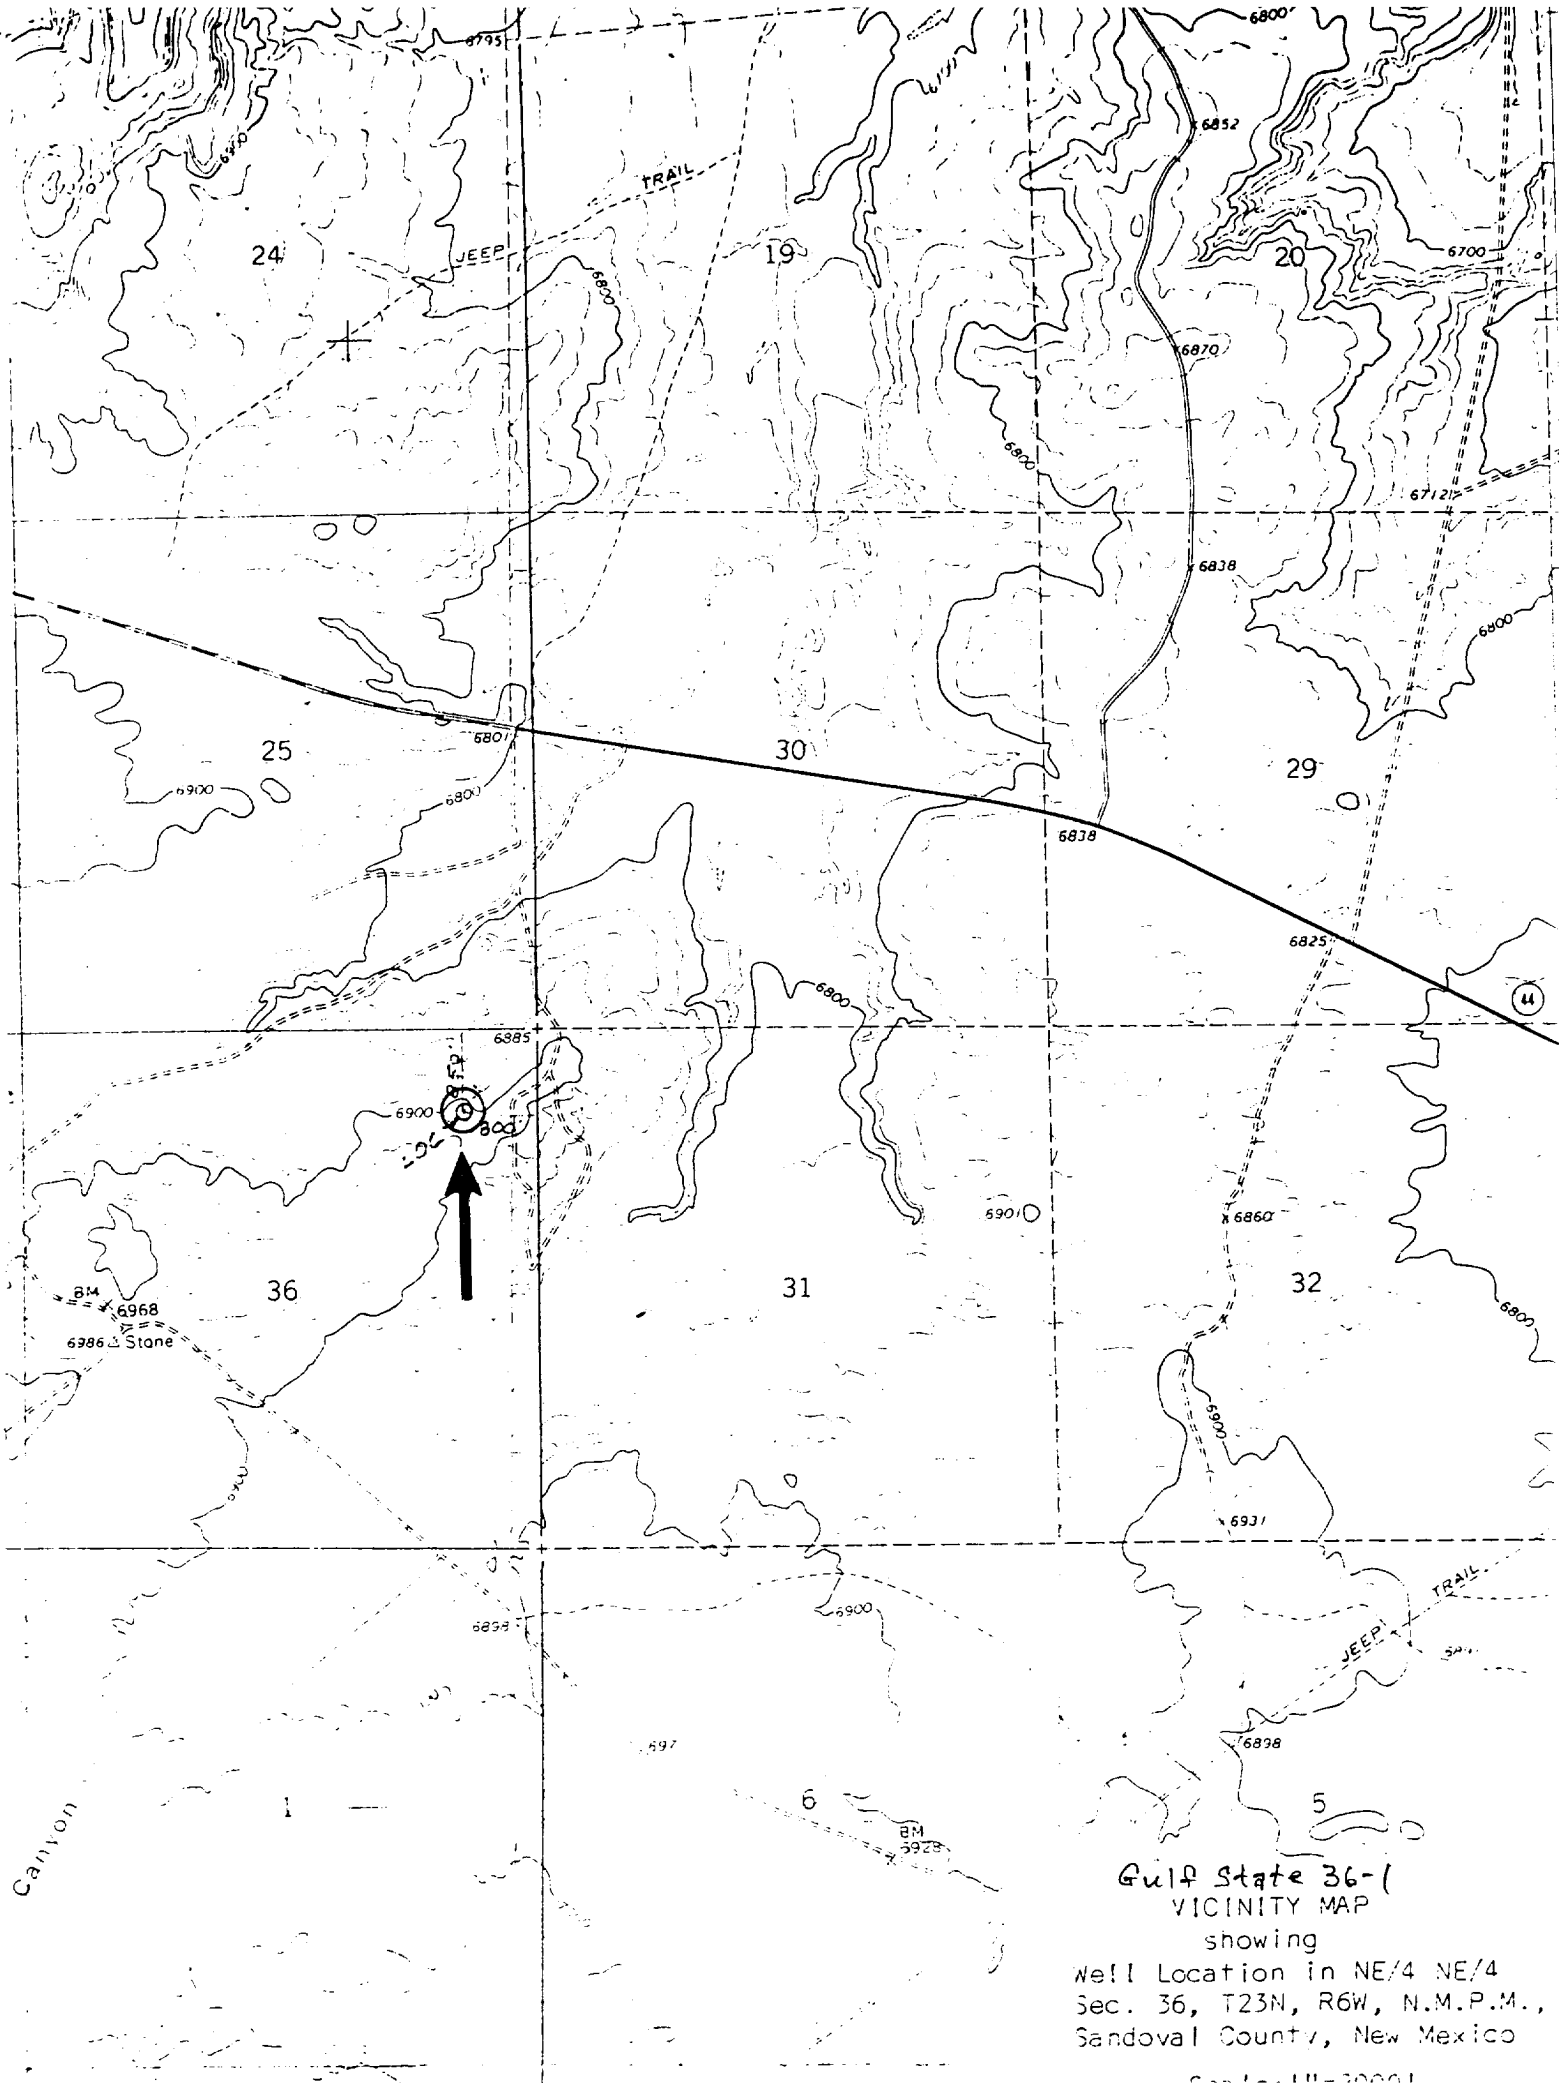

Gulf State 36-1
VICINITY MAP

showing
Well Location in NE/4 NE/4
Sec. 36, T23N, R6W, N.M.P.M.,
Sandoval County, New Mexico



Lobo Production
Gulfstate 36 #1
A-36-23N-6W