

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPPLICATE*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 1004-0135
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. ☒ OIL WELL ☐ GAS WELL ☐ OTHER

2. NAME OF OPERATOR CONOCO INC.

3. ADDRESS OF OPERATOR P. O. Box 460, Hobbs, N.M. 88240

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface
790' FSL & 990' FEL

14. PERMIT NO.

15. ELEVATIONS (Show whether DR, RT, GR, etc.)

5. LEASE DESIGNATION AND SERIAL NO.
Contract 121

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Jicarilla Apache

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
AXI Apache N

9. WELL NO.
11

10. FIELD AND POOL, OR WILDCAT
Blanco Mesaverde/PC

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec 12-25N-4W

12. COUNTY OR PARISH
Rio Arriba

13. STATE
NM

RECEIVED

MAR 07 1985

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF
FRACTURE TREAT
SHOOT OR ACIDIZE
REPAIR WELL
(Other)

☐
☐
☐
☐
☐

PULL OR ALTER CASING
MULTIPLE COMPLETION
ABANDON*
CHANGE PLANS

☐
☐
☐
☐
☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF
FRACTURE TREATMENT
SHOOTING OR ACIDIZING
(Other)

☒
☐
☐
☐


REPAIRING WELL
ALTERING CASING
ABANDONMENT*

☒
☐
☐
☐

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

MIRU. Set RBP @ 5910'. Spot 100# sand on RBP. Set pkr @ 5261'. Squeeze perfs @ 5483'-5878' w/150 sx class "H" neat, tailed w/100 sx class "H" w/5/102 D-60 fluid loss additive. DO cmt. Dumped 2 sx oyster shells on PC, fell thru @ 5751'. Test interval 5249'-5910' to 1200 psi. Set BP. Spot 5 bbls 12% HCL @ 3840'-48'. Swab Pmpd 11.9 bbls HCL & 60 MCF off N₂ down MV side. Pmpd. 28 MCF of N₂ down PC side. PC Flowed 0 BO, 1 BW & 22 MCF on 1/14/85. MV Flowed 0 BO, 0 BW & gas TSTM on 1/14/85.

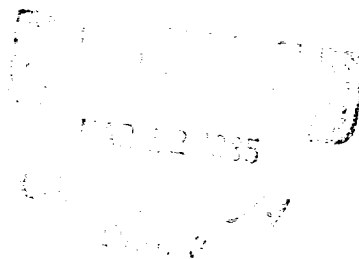

18. I hereby certify that the foregoing is true and correct

SIGNED

Und. [Signature]

TITLE Administrative Supervisor

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

ACCEPTED FOR RECORD
DATE 3/8/85

DATE MAR 11 1985

FARMINGTON RESOURCE AREA

BY *[Signature]*

*See Instructions on Reverse Side

NMOCC