

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☐ other ☒ Dry Hole  
2. NAME OF OPERATOR  
Jerome P. McHugh  
3. ADDRESS OF OPERATOR  
P O Box 208, Farmington, NM 87401  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 790' FNL - 1850' FEL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☒

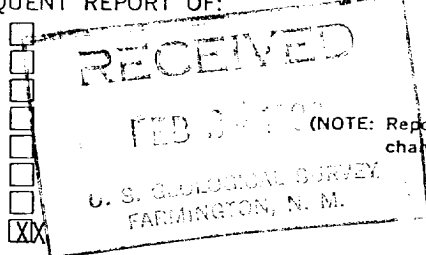

5. LEASE  
NM 23033  
6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
7. UNIT AGREEMENT NAME  
8. FARM OR LEASE NAME  
Federal  
9. WELL NO.  
31  
10. FIELD OR WILDCAT NAME  
Undesignated  
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec 3 T24N R2W  
12. COUNTY OR PARISH  
Rio Arriba  
13. STATE  
NM  
14. API NO.  
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
7235' GL

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Plugged and abandoned well as follows on 7-20-81:

1. Spotted 23 sk cement plug 3300' - 3000'.
2. Spotted 13 sk cement plug 2896 - 2720'.
3. Spotted 10 sk cement plug 2573 - 2441'.
4. Found Free point of 4½" csg. at 1698'. Shot off csg.
5. Spotted 18 sk cement plug 50' inside 4½" csg. stub and 50' above 4½" csg. stub.
6. Spotted 30 sk cement plug at 262' (Bottom of surface csg.) 262 - 162'.
7. Spotted 15 sk cement plug from 50' to surface and installed dry hole marker.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED \_\_\_\_\_ TITLE \_\_\_\_\_ Agent \_\_\_\_\_ DATE 2-19-81

Jim L. Jacobs

Federal or State office use)

Approved as to plugging of the well bore.  
Liability under bond is retained until  
surface restoration is completed.

NMOCC

APPROVED  
AS AMENDED

DEC 10 1984  
J. L. Stan McKee  
M. MILLENBACH  
AREA MANAGER