

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☐ well other ☐

2. NAME OF OPERATOR

Mesa Petroleum Co.

3. ADDRESS OF OPERATOR

1660 Lincoln St., #2800 Denver CO 80264

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 840' FNL & 500' FWL

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH: same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐


MULTIPLE COMPLETE ☐

CHANGE ZONES ☐


ABANDON* ☐

(other) Spud Report & BOP test x

SUBSEQUENT REPORT OF:

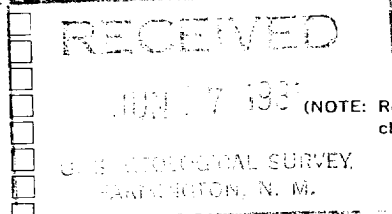

(NOTE: Report results of multiple completion or zone change on Form 9-331-C.)



17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Subject well was spudded at 3:00 PM 6/8/81. A 12 1/4" hole was drilled to 251'. Ran 6 joints 8 5/8" 24#/ft. new K-55 STC surface casing and set at 243' KB. Cemented surface casing with 200 sacks class "B" containing 3% CaCl₂ and 1/4#/sack celloflake. Circulated 12 bbls. cement to surface. Tested BOP to 1000 psi, held okay.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Randy Nordman TITLE Regulatory Coord. DATE June 15, 1981

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

NMOCC

*See Instructions on Reverse Side

RECEIVED FOR RECORD

JUN 16 1981

BY Dean Elliott