

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☒ gas well ☐ other ☐

2. NAME OF OPERATOR  
Chace Oil Company, Inc.

3. ADDRESS OF OPERATOR  
313 Washington SE Albuquerque, NM 87108

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.) Unit "I" 1935' SL and 675' EL  
AT SURFACE:  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:



16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) Spud Well

SUBSEQUENT REPORT OF:

☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☒

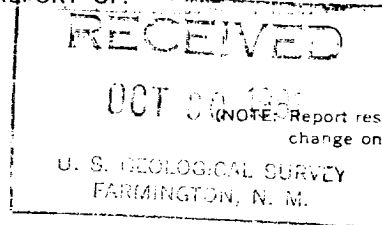

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

10/24/81 Moved in Four Corners drilling rig #10. Spudded 1 PM. Ran 5 joints 8-5/8" 23# casing. Total casing 212.33'. Set at 225.00' KB. Woodco cemented with 173 sxs Class "B", 3% calcium chloride, 1/4# flow seal per sack. Plug down at 5:40 PM. Four barrels cement were circulated to surface.

10/25/81 Drilling at 646'. Bit #2 MW 8.6 Vis. 35 WL 6.8 Drilled out cement and shoe at 5:30 AM. Started drilling new 7-7/8" hole at 6 AM.

10/26/81 Drilling at 2636'. MW 9.2 Vis. 35 WL 5.0 Oil 8% Bit #4

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Roger McLean TITLE President DATE 10/25/81

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY: