

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil well ☒ gas well ☐ other ☐
2. NAME OF OPERATOR
Petro-Lewis Corporation
3. ADDRESS OF OPERATOR P.O. Box 2250
717 17th St. Denver, CO 80201
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 810' FSL & 1800' FWL (SE SW)
AT TOP PROD. INTERVAL: Same
AT TOTAL DEPTH: Same
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF
FRACTURE TREAT
SHEED OR ACIDIZE
REPAIR WELL
PULL OR ALTER CASING
MULTIPLE COMPLETE
CHANGE ZONES
ABANDON*

SUBSEQUENT REPORT OF:

(Other) cement casing to top of Ojo Alamo

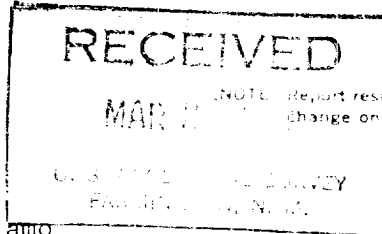

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directly drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Petro-Lewis Corporation proposes to do the following remedial well work:

- Set RBP at 4000'.
- Perforate casing w/4 squeeze holes at 3820'.
- Circulate cement between casing and hole to above 3350'. (Top of Ojo Alamo sand is at 3426'.)
- Drill out and test casing, pull out of hole with RBP.
- Put on production.

Subsurface Safety Valve: Manul. and Type

Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct.

SIGNED *William D. Fulton*

TITLE Petroleum Engineer DATE 3/22/82

(This space for Federal or State office use.)

APPROVED BY
CONDITIONS OF APPROVAL IF ANY

TITLE

DATE

*See Instructions on Reverse Side

NMOCC

APR 1982
Elliott
DISTRICT ENGINEER