

JUN 1 1956

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYLand Office Santa Fe
Lease No. 080375
Unit Sheets

SUNDRY NOTICES AND REPORTS ON WELLS

| | | |
|---|---|-------------------------------------|
| NOTICE OF INTENTION TO DRILL..... | SUBSEQUENT REPORT OF WATER SHUT-OFF..... | <input checked="" type="checkbox"/> |
| NOTICE OF INTENTION TO CHANGE PLANS..... | SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING..... | |
| NOTICE OF INTENTION TO TEST WATER SHUT-OFF..... | SUBSEQUENT REPORT OF ALTERING CASING..... | |
| NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL..... | SUBSEQUENT REPORT OF REDRILLING OR REPAIR..... | |
| NOTICE OF INTENTION TO SHOOT OR ACIDIZE..... | SUBSEQUENT REPORT OF ABANDONMENT..... | |
| NOTICE OF INTENTION TO PULL OR ALTER CASING..... | SUPPLEMENTARY WELL HISTORY..... | |
| NOTICE OF INTENTION TO ABANDON WELL..... | | |

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

May 4th, 1956

Well No. 8 is located 790 ft. from N line and 1485 ft. from W line of sec. 31
SE/4 SW/4 Sec. 31 26N 7W N.M.P.M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Ballard PC Rio Arriba New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6901 ft.

DETAILS OF WORK


(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

3-24-56 TD 2764'. Set 63 joints 2595' of 5-1/2" OD 15.5# J-55 casing and 4 joints 167' of 5-1/2" OD 14# casing at 2761' with 100 sacks cement.

3-28-56 Pressured up on casing to 1000#. No pressure decrease in one hour.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company BEYNSON-MONTIN
Address 405 1/2 West Broadway
Farmington, New Mexico

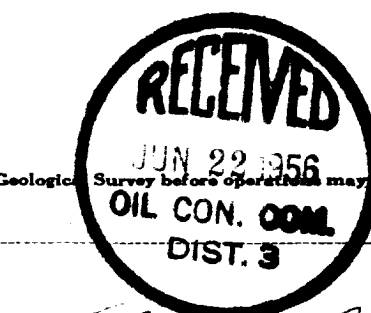

By [Signature]
Title Field Superintendent

