

NEW MEXICO OIL CONSERVATION COMMISSION
GAS WELL TEST DATA SHEET - - SAN JUAN BASIN

(TO BE USED FOR FRUITLAND, PICTURED CLIFFS, MESAVERDE, & ALL DAKOTA
EXCEPT BARKER DOME STORAGE AREA)

Pool SOUTH BLANCO Formation PICTURED CLIFFS County RIO ARriba
Purchasing Pipeline EL PASO NATURAL GAS COMPANY Date Test Filed 2-3-56
Operator J. CLAY TUNNEY Lease RIPLEY Well No. 1-24
Unit D Sec. 24 Twp. 27N Rge. 7W Pay Zone: From 3169 To 3258
Casing: OD 5-1/2" WT. 14# Set At 3174 Tubing: OD 1-1/4" WT. 2.4# T. Perf. 3223-28
Produced Through: Casing X Tubing _____ Gas Gravity: Measured 0.705 Estimated _____
Date of Flow Test: From 12-23-55 To 12-31-55 * Date S.I.P. Measured 9-19-55
Meter Run Size 4.006 Orifice Size 0.750 Type Chart Sq. Rt. Type Taps Flange

OBSERVED DATA

Flowing casing pressure (Dwt) _____ psig + 12 = _____ psia (a)
Flowing tubing pressure (Dwt) _____ psig + 12 = _____ psia (b)
Flowing meter pressure (Dwt) _____ psig + 12 = _____ psia (c)
Flowing meter pressure (meter reading when Dwt. measurement taken):
Normal chart reading _____ psig + 12 = _____ psia (d)
Square root chart reading (_____) ² x spring constant _____ = _____ psia (d)
Meter error (c) - (d) or (d) - (c) _____ ± _____ = _____ psi (e)
Friction loss, Flowing column to meter:
(b) - (c) Flow through tubing: (a) - (c) Flow through casing _____ = _____ psi (f)
Seven day average static meter pressure (from meter chart):
Normal chart average reading 244 psig + 12 = 256 psia (g)
Square root chart average reading (_____) ² x sp. const. _____ = _____ psia (g)
Corrected seven day avge. meter press. (p_f) (g) + (e) _____ = 256 psia (h)
P_t = (h) + (f) _____ = 256 psia (i)
Wellhead casing shut-in pressure (Dwt) 971 psig + 12 = 983 psia (j)
Wellhead tubing shut-in pressure (Dwt) _____ psig + 12 = _____ psia (k)
P_c = (j) or (k) whichever well flowed through _____ = 983 psia (l)
Flowing Temp. (Meter Run) 44 °F + 460 _____ = 504 °Abs (m)
P_d = 1/2 P_c = 1/2 (l) _____ = 492 psia (n)

FLOW RATE CALCULATION

Q = _____ X $\left(\frac{\sqrt{(c)}}{\sqrt{(d)}} \right)^* =$ _____ MCF/da
(Integrated)

DELIVERABILITY CALCULATION

D = Q 110 $\left[\frac{P_c^2 - P_d^2}{P_c^2 - P_w^2} \right]^n =$ _____ MCF/da.
8308 0.803 81 USE

SUMMARY

n = 0.85

P_c = 983 psia
Q = 110 Mcf/day
P_w = 256 psia
P_d = 492 psia
D = 85 Mcf/day


Company J. CLAY TUNNEY
By Virgil F. Stork
Title Engineer
Witnessed by _____
Company _____

- * This is date of completion test.
- * Meter error correction factor

REMARKS OR FRICTION CALCULATIONS

GL	(1-e ⁻⁸)	(F _c Q) ²	(F _c Q) ² (1-e ⁻⁸) R ²	P _t ² (Column 1)	P _t ² + R ²	P _w
			Friction negligible			

From EPNS Chart #71-154-01 q = (110) 24
(192)

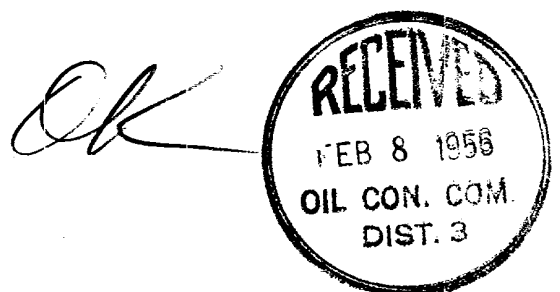

OIL CONSERVATION COMMISSION		
AZTEC DISTRICT OFFICE		
No. Copies Received		3
DISTRIBUTION		
	NO. FURNISHED	
Operator		
Santa Fe	/	
Proration Office		
State Land Office		
U. S. G. S.	/	
Transporter		
File	/	✓