

Jones, Brad A., EMNRD

From:

Kim_Champlin@xtoenergy.com

Sent:

Monday, March 29, 2010 11:30 AM

To:

Jones, Brad A., EMNRD

Subject:

BGT Closures

Hi Brad,

XTO Energy is taking the necessary steps to P&A some wells in the next several months. All of these wells had pit applications submitted to your office. Can you please review/approve the closure plan part of the application? If you have any questions or require further information feel free to contact me. Thank you.

Kutz Federal Gas Com A#1	30-045-26069	Sec. 08M-T28N-R10W	11/25/2008
Abrams Gas Com C #1	30-045-07880	Sec. 25F-T29N-R10W	12/5/2008
Thomas#1	30-045-09722	Sec. 09A-T30N-R11VV	12/12/2008
Berger A #1	30-045-13035	Sec. 21J-T26N-R11W	1/9/2009
Byrd Frost #1	30-045-25533	Sec. 16D-T26N-R08W	1/16/2009

Kim Champlin
XTO Energy Inc.
EH&S Administrative Coordinator
San Juan Division
(505) 333-3100 office
(505) 330-8357 cell
(505) 333-3280 fax
kim_champlin@xtoenergy.com

District 1 1625 N. French Dr., Hobbs, NM 88240 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico **Energy Minerals and Natural Resources** Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and
below-grade tanks, submit to the appropriate
NMOCD District Office.
For permanent pits and exceptions submit to
the Santa Fe Environmental Bureau office and
provide a copy to the appropriate NMOCD
District Office.

, , , , , , , , , , , , , , , , , , ,	District Office. G L 1 V L D
Pit, Closed-Loop System, Below-G Proposed Alternative Method Permit or Clo	
Type of action: Permit of a pit, closed-loop system, below-grad	ade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-	loon system helow-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operation environment. Nor does approval relieve the operator of its responsibility to comply with any other approval.	ons result in pollution of surface water, ground water or the
t. Operator: XTO Energy, Inc.	GRID #: 5380
Address: #382 County Road 3100, Aztec, NM 87410	
Facility or well name:KUTZ FEDERAL GAS COM A # 1	
API Number: <u>30-045-26069</u> OCD Permit Number:	
U/L or Qtr/Qtr M Section 08 Township 28N Range 10W Co	
Center of Proposed Design: Latitude 36.670695 Longitude 107.925235	
Surface Owner: State Private Tribal Trust or Indian Allotment	
Pit: Subsection F or G of 19.15.17.11 NMAC Temporary: Drilling Workover Permanent Emergency Cavitation P&A Lined Unlined Liner type: Thickness mil LLDPE HDPE PV	√C ☐ Other
String-Reinforced	
Liner Seams: Welded Factory Other Volume:	bbl Dimensions: Lx Wx D
3. Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to action intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type: Thickness mil LLDPE HDPE Liner Seams: Welded Factory Other	· · · · ·
4. Selow-grade tank: Subsection I of 19.15.17.11 NMAC Volume: 120	tomatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☒ Other <u>Visible sidewalls, vaul</u>	ted, automatic high-level shut off, no liner
Liner type: Thicknessmil	
5.	

Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hinstitution or church)	hospital,
Four foot height, four strands of barbed wire evenly spaced between one and four feet	
☐ Alternate. Please specify Four foot height, steel mesh field fence (hogwire) with pipe top railing	
7.	
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Netting Other Expanded metal or solid vaulted top	
Monthly inspections (If netting or screening is not physically feasible)	
8. Signs: Subsection C of 19.15.17.11 NMAC	
☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
☑ Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.	
Please check a box if one or more of the following is requested, if not leave blank:	office for
Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval.	office for
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dryical above-grade tanks associated with a closed-loop system.	priate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits)	☐ Yes ☐ No ☑ NA
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal fact of a private demostic fresh victor well or applies that less than five households use for demostic or steel.	☐ Yes ☑ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☑ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☒ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ⊠ No
Within a 100-year floodplain FEMA map	☐ Yes ⊠ No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number:
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 15. Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
 ✓ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ✓ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ✓ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC ✓ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Instructions: Please indentify the facility or facilities for the disposal of liquids, facilities are required.	Steel Tanks or Haul-off Bins Only: (19.15.17.13. Edition of the drilling fluids and drill cuttings. Use attachment if n	NMAC) nore than two
Disposal Facility Name:	Disposal Facility Permit Number:	_
Disposal Facility Name:	Disposal Facility Permit Number:	
Will any of the proposed closed-loop system operations and associated activities of ☐ Yes (If yes, please provide the information below) ☐ No		
Required for impacted areas which will not be used for future service and operation Soil Backfill and Cover Design Specifications based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	requirements of Subsection H of 19.15.17.13 NMAC I of 19.15.17.13 NMAC	2
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the provided below. Requests regarding changes to certain siting criteria may required considered an exception which must be submitted to the Santa Fe Environmenta demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC	e administrative approval from the appropriate disti I Bureau office for consideration of approval. Justi	rict office or may be
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Dat	a obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Database search	a obtained from nearby wells	☐ Yes ☐ No☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Database search;	a obtained from nearby wells	☐ Yes ☐ No☐ NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other sig lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	nificant watercourse or lakebed, sinkhole, or playa	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church - Visual inspection (certification) of the proposed site; Aerial photo; Satellit		☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that les watering purposes, or within 1000 horizontal feet of any other fresh water well or so NM Office of the State Engineer - iWATERS database; Visual inspection	pring, in existence at the time of initial application.	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approx	•	☐ Yes ☐ No
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visu	al inspection (certification) of the proposed site	☐ Yes ☐ No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining	and Mineral Division	☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geolog Society; Topographic map	y & Mineral Resources; USGS; NM Geological	☐ Yes ☐ No
Within a 100-year floodplain FEMA map		☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Protocols and Procedures - based upon the appropriate requirements of 19.1. Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Disposal Facility Name and Permit Number (for liquids, drilling fluids and Confirmation Plan - based upon the appropriate requirements of Subsection Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	uirements of 19.15.17.10 NMAC Subsection F of 19.15.17.13 NMAC propriate requirements of 19.15.17.11 NMAC ad) - based upon the appropriate requirements of 19.15.17.13 NMAC uirements of Subsection F of 19.15.17.13 NMAC Subsection F of 19.15.17.13 NMAC rill cuttings or in case on-site closure standards cannot of 19.15.17.13 NMAC I of 19.15.17.13 NMAC	15.17.11 NMAC

·		
Operator Application Certification:		
I hereby certify that the information submitted with this application	on is true, accurate and complete to the	ne best of my knowledge and belief.
	•	•
,	Title:	Environmental Representative
Signature: KinChamplin	Date:	11/21/08
•		(505) 333-3100
e-mail address: kim_champlin@xtoenergy.com	Telephone.	(303) 333-3100
20.		
OCD Approval: Permit Application (including closure plan)	Closure Plan (only) U OCD	Conditions (see attachment)
OCD Representative Signature:		Approval Date:
Title: Environmental Engiller		
Title:	OCD Permit Num	ber:
21.		
Closure Report (required within 60 days of closure completion		
Instructions: Operators are required to obtain an approved clos. The closure report is required to be submitted to the division with		
section of the form until an approved closure plan has been obta		
	<u></u>	pletion Date:
		piction Date:
22. Closure Method:		
☐ Waste Excavation and Removal ☐ On-Site Closure Metho	d Alternative Closure Method	☐ Waste Removal (Closed-loop systems only)
☐ If different from approved plan, please explain.		
23.		
Closure Report Regarding Waste Removal Closure For Closed	d-loop Systems That Utilize Above	Ground Steel Tanks or Haul-off Bins Only:
Instructions: Please indentify the facility or facilities for where two facilities were utilized.	ine uquias, arilling fluids and arill c	cuttings were disposed. Use attachment if more than
Disposal Facility Name:	Disposal Facility P	ermit Number:
Disposal Facility Name:		ermit Number:
Were the closed-loop system operations and associated activities p		
Yes (If yes, please demonstrate compliance to the items bel		be used for future service and operations?
Required for impacted areas which will not be used for future serv	vice and operations:	
Site Reclamation (Photo Documentation)	F	
Soil Backfilling and Cover Installation		
Re-vegetation Application Rates and Seeding Technique		
24. Closure Report Attachment Checklist: Instructions: Each of the contraction of the con	the following items must be attached	to the closure report. Place indicate by a check
mark in the box, that the documents are attached.	ne jouowing tiems must be unuched	to the closure report. I reuse maicute, by a check
☐ Proof of Closure Notice (surface owner and division)		
Proof of Deed Notice (required for on-site closure)		
☐ Plot Plan (for on-site closures and temporary pits) ☐ Confirmation Sampling Analytical Results (if applicable)		
Waste Material Sampling Analytical Results (required for o	n-site closure)	
Disposal Facility Name and Permit Number		
☐ Soil Backfilling and Cover Installation ☐ Re-vegetation Application Rates and Seeding Technique		
Site Reclamation (Photo Documentation)		
On-site Closure Location: Latitude	Longitude	NAD: □1927 □ 1983
25.		
Operator Closure Certification:		
I hereby certify that the information and attachments submitted with a life of the state of the	th this closure report is true, accurate	e and complete to the best of my knowledge and
belief. I also certify that the closure complies with all applicable of	nosure requirements and conditions s	specified in the approved closure plan.
Name (Print):	Title:	
G'	~	
Signature:	Date:	
e-mail address:	Telephone:	

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

- 1. XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.
- 2. XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.
- 4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:

Envirotech Permit No. NM01-0011 and IEI Permit No. NM 01-0010B Soil contaminated by exempt petroleum hydrocarbons Produced sand, pit sludge and contaminated bottoms from storage of exempt wastes

Basin Disposal Permit No. NM01-005 Produced water

- 5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office has approved prior to removal. Any associated liners will be removed, properly cleaned and disposed of per 19.15.9.712 NMAC at San Juan County Landfill. Documentation of the final disposition will be included in the closure report.
- 6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.
- 7. XTO will test the soils beneath the below-grade tank to determine whether a release has occurred. At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks Page 2

analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

- 8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.
- 9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.
- 10. Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally. The notification will include the following:
 - i. Operator's name
 - ii. Well Name and API Number
 - iii. Location by Unit Letter, Section, Township, and Range

The surface owner shall also be notified prior to the implementation of any closure operations of below-grade tanks as per the approved closure plan using certified mail, return receipt requested.

- 11. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. Soil cover will be constructed to the site's existing grade and ponding of water and erosion of the cover material will be prevented with drainage control, natural drainages and silt traps where needed.
- 13. XTO will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks Page 3

- 14. All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
 - i. Proof of closure notice to division and surface owner;
 - ii. Details on capping and covering, where applicable;
 - iii. Inspection reports;
 - iv. Confirmation sampling analytical results;
 - v. Disposal facility name(s) and permit number(s);
 - vi. Soil backfilling and cover installation;
 - vii. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation requirements if applicable);
 - viii. Photo documentation of the site reclamation.

OIL CONSERVATION DIVISION

STATE OF NEW MEXICO

P. O. BOX 2044

form C-107 Revised 10-1-78

SANTA FE, NEW MEXICO 87501

		All distances must be fo	om the cuter	in und a l l / a · l i	The Sect		<u>-</u>	,
Operator			Legee	. ر ب		. "	1"	Well No.
	DUCTION COMPA		Kutz	Federal		Com >	4	LL
Unit Latter	Section	Township	Range		County			
M	8	28N		10W]		San Juar	1	
Actual Footage Loca	_		3.00	0		[7 1		
BLO Ground Level Elevi	Producing For	outh line and	100 P∞l	U feet	Irom the	<u>West</u>	Dedica	line ated Acreage:
5752	Chacra	nation	Otero Ch	acra			j	24 94- 160 Acree
			L		, ,	• ,		
1. Outline the	e acreage dedica	ted to the subject w	eli by color	ed pencil o	r hachur	e marks on	the pla	it below.
2. If more the interest an		dedicated to the wel	l, outline e	ach and ide	ntify the	ownership	thereo	f (both as to working
interest an	d toyatty).							
3. If more tha	n one lease of d	ifferent ownership is	dedicated to	the well,	have the	interests o	of all o	owners been consoli-
		nitization, force-pool		•				
,								
Yes	X No If an	iswer is "yes!" type	of consolida	tion			· · · · · · · · · · · · · · · · · · ·	
		owners and tract desc	criptions wh	ich have ac	tually be	en consoli	dated.	(Use reverse side of
	necessary.)	d to the	1 :		-111	J /L		institution (1)
		ed to the well until al or until a non-standar				. •		
sion.	ing, or otherwise)	or murit a non-arangal	u unit, ettm	maring suc	n mieres	is, nas bee	n appr	oved by the Commis-
a 1011.								
					•		CER	TIFICATION
						I hereby	certify	that the information con-
				•				true and complete to the
						best of a	ny know	ledge and belief.
		DE	CEIV			1 BL	77	hau)
			CEIV	EM		Name		
		υ <i>Π</i>		[U]		B.D. S	haw	
		Al	JG22 1984	1		Position		
			~~\! ~	11. 4 4		Adm. S	uperv	isor
			CON. D			Company	_	
		۶ ۱.	DIST. 3	i Wali	_)		Produ	ction Co.
		• •		'-		Date 5_20_9	<i>/</i> .	
			783G 1 5			5-30-8	+	
		Ĭ.						
		•			_ A	1		at a second
						1	-	that the well location
						l l		at was plotted from field surveys made by me or
	i					i		islan, and that the same
	1	1	Į.			1		rect to the best of my
	1	1	1			knowledg		·
						1		
	1		!		1			_
			1		7012	Date Survey	, ed .	24 3
1000!\$	i	1	!		1	April		1981
	1		i I		1			lonal Engineeri
0	1	1	, 			ond Lone	d Survey	Or
81.01	I	1	1			The second	1/2	Kerdell
	I .	1	1		- 1	Fred	3. Ке	17 Jf. 1
		1	. 1		!	Centilicarés	₹Ç. 🛴 1 :	
	Se 4 1.	2 · 1 · H = 1 · A /)!				1950	<u> </u>	area of



Pit Permit Siting Criteria Information Sheet

Client:	XTO Energy	
Project:	Pit Permits	
Revised:	4-Nov-08	
Prepared by:	Brooke Herb	

1 0 DUA 4403, Durang	0,0001302	Information Sheet	Prepared by:	Brooke Herb
API#:[3004526069	USPLSS:	T28N,R10W,S08M
Name:	KUTZ F	EDERAL GAS COM A #1	Lat/Long:	36.670695, -107.925235
Depth to groundwater:		> 100'	Geologic formation:	Nacimiento Formation
Distance to closest continuously flowing watercourse:	2.36 mi	iles S of San Juan River		
Distance to closest significant watercourse, lakebed, playa lake, or sinkhole:		es W of Creighton Canyon 025' E of Sullivan Canyon Wash	,	
			Soil Type:	Entisols
Permanent residence, school, hospital, institution or church within 300'		No		
_			Annual	8.71 inches (Bloomfield)
Domestic fresh water well or spring within 500'		No	Precipitation: Precipitation Notes:	Historical Daily Max Bloomfield 4.19"
Any other fresh water well or spring within 1000'		No		
Within incorporated municipal boundaries		No	Attached Documents:	Groundwater report and Data; FEMA Flood Zone Map
Within defined municipal fresh water well field		No		Aerial Photo, Topo Map, Mines Mills and Quarries Map
Wetland within 500'		No	Mining Activity:	2.38 miles SE of a Materials Pit
Within unstable area		No		2.36 filles 3L Of a Materials Fit
Within 100 year flood plain	No - I	FEMA Flood Zone 'X'		
Additional Notes:				

KUTZ FEDERAL GAS COM A #1 Below Ground Tank Hydrogeologic Report for Siting Criteria

General Geology and Hydrology

The San Juan Basin is a typical Rocky Mountain basin with a gently dipping southern flank and a steeply dipping northern flank. Asymmetrically layered Tertiary sandstones and shales, along with Quaternary alluvial deposits, dominate surficial geology (Dane and Bachman, 1965). The proposed pit location will be located in the central Kutz Canyon region of the San Juan Basin. The predominant geologic formation is the Nacimiento Formation of Tertiary age, which underlies surface soils and is often exposed (Dane and Bachman, 1965). Deposits of Quaternary alluvial and aeolian sands occur prominently near the surface of the area, especially near streams and washes.

Cretaceous and Tertiary sandstones, as well as Quaternary alluvial deposits serve as the primary aquifers in the San Juan basin (Stone et al., 1983). In most of the proposed area, the Nacimiento Formation lies at the surface and grades into the Animas Formation to the west. Thickness of the Nacimiento ranges from 418 to 2232 feet (Stone et al., 1983). Aquifers within the coarser and continuous sandstone bodies of the Nacimiento Formation are between 0 and 1000' deep in this section of the basin (Stone et al., 1983). Groundwater within these aquifers flows toward the San Juan River.

The prominent soil type at the proposed site are entisols and aridisols, which are defined as soils that exhibit little to no any profile development (www.emnrd.state.nm.us). Soils are basically unaltered from their parent rock. Miles of arroyos, washes and intermittent streams exist as part of the drainage network towards the San Juan River. These features often cut into soil and other unconsolidated materials, contributing to sedimentation downstream. The sudden influx of water from storm events easily erodes the soils that cover the area. The sudden influx of water from storm events easily erodes the soils that cover the area and prohibits effective recharge to the underlying aquifers.

Dry and arid weather further prohibit active recharge. The climate of the region is arid, averaging 8 to 12 inches of rainfall annually. As is typical of the southwestern United States monsoonal weather patterns, most precipitation falls from August through October. The heaviest rainfall occurs in the summer in isolated, intense cloudbursts. November through June is relatively dry. Snow generally falls from December to mid-February and averages less than one-half inch in depth. However, most recharge occurs during the winter months during snowmelt periods from the upper elevations (Western Regional Climate Center www.wrcc.dri.edu).

The predominant vegetation is sagebrush and grasses with a more restricted pinon-juniper association (Dick-Peddie, 1993). However, vegetation is very sparse and discontinuous.

Site Specific Hydrogeology


Depth to groundwater is estimated to be greater than 100 feet. This estimation is based on data from Stone and others (1983), the USGS Groundwater Atlas of the United States and depth to groundwater data published on the New Mexico State Engineer's iWaters Database website. Local topography and proximity to surface hydrologic features are also taken into consideration.


Beds of water-yielding sandstone are present in the Nacimiento Formation, which are fluvial in origin and are interbedded with siltstone, shale and coal. Porous sandstones form the principal aquifers, while relatively impermeable shales form confining units between the aquifers (Stone et al., 1983). Local aquifers exist within the Nacimiento Formation at depths greater than 100 feet and thicknesses of the aquifer can be up to 3500 feet (USGS, Groundwater Atlas of the US).

The site in question is located near Kutz Canyon, where deeply eroded sandstone-capped mesas and slope-forming mudstones occur in a sparsely vegetated and arid badlands-type setting. Broad shalely hills are interspersed with occasional sandstone outcrops, and systems of dry washes and their tributaries are evident on the attached aerial image.

The pit is situated at an elevation of approximately 5773 feet. Groundwater is expected to be shallow within Kutz Wash, and the San Juan River. However, the proposed site is located approximately 2.12 miles from the Kutz Canyon tributary system and 3.50 miles east of Kutz Wash, as well as 250 feet higher in elevation. The San Juan River is 2.36 miles to the north of the proposed site, and approximately 320 feet lower in elevation. This suggests that groundwater is greater than 100 feet at the proposed site.

State iWaters data points are sparsely distributed in this region, except to the north where they are clustered along the San Juan River. There is an iWaters data point approximately 1.74 miles to the northeast of the site, at an elevation of approximately 5543 feet. Depth to groundwater within the well is 35 feet below ground surface. A map showing the location of wells in reference to the proposed pit location is attached.

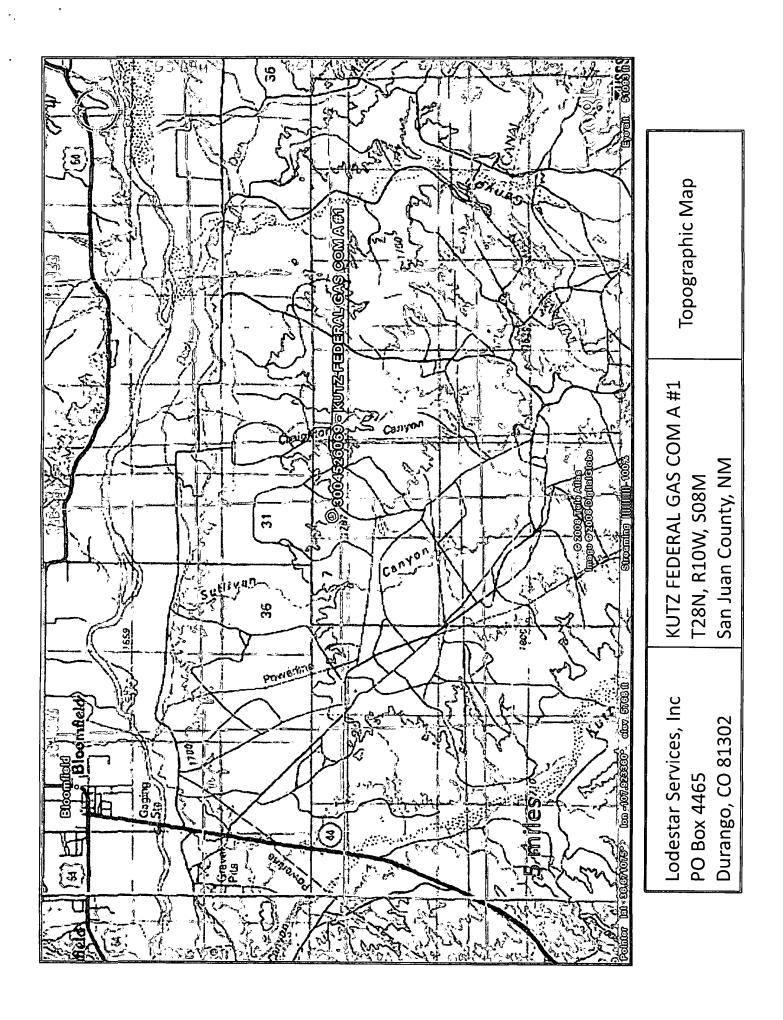

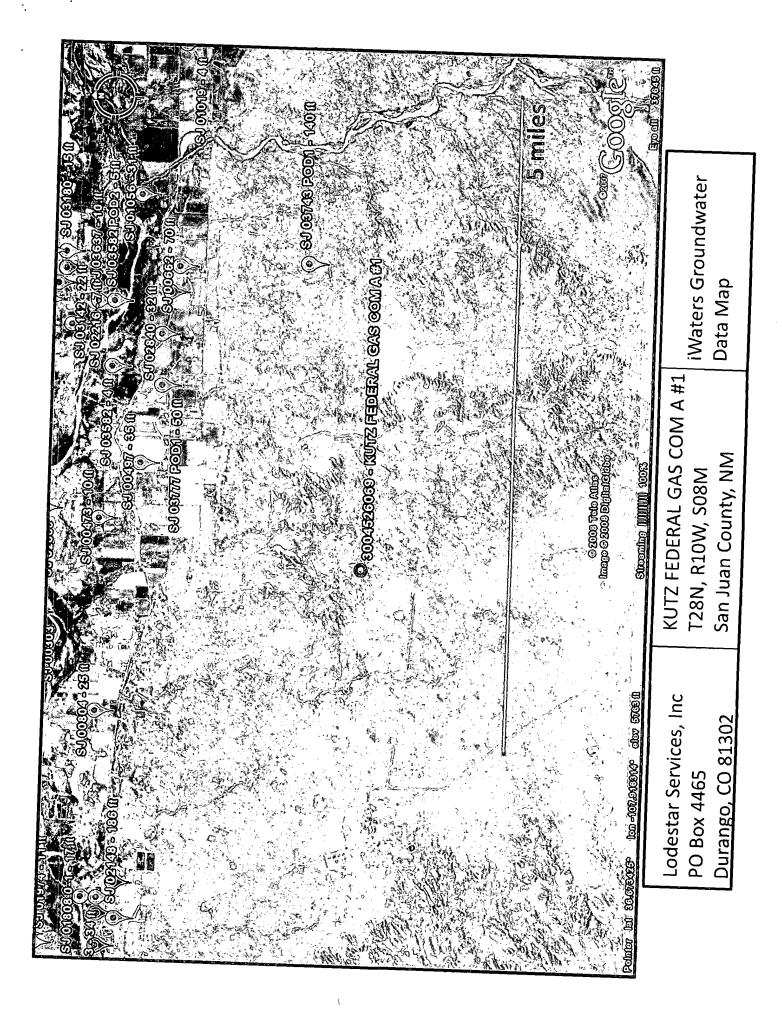

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 26h Range: 150 Sections:

WATER COLUMN REPORT 10/27/2008

4	n veptn wat Water Colu	500 450 50 20	10	60 20 40	20	in 10	150	20	40 9 31	20 5 15		0.00	to	40 12 28	¢st	OI.	10	20 17 3			20 7 13	2.0	00 ET	20 24	ţ0	110 34 76	61
4	Š ¦≩																										
	X																										
=SE)	est) X																										
=SW 4	Small																										
TE 3=SW 4	to smallest; I Zone	61						11	1		~#	64	Δ1				67		ćs1	m	~**		\$-II		1		61
2=NE 3=SW 4	gt to small q q Zone	22 p	ΘI.			.	.⊣ છ	'라' I	-1	m	~(I)	о 	(A)	,-1	~ti	~; t	භ ල	ი თ	(SI	60 60	*# (Y)	-ch	*:() *:()	97	·I		(VI 1911
NW 2=NE 3=SW 4	ggest to g q q q		2 2	~;†*	~!*	131	 	ৰ ল জ	 	ლ ლ	~!* ~!*	1		;i	-c#	eli eli	eo ⊘ ⊘	Ø	ლ	44, 60	*# (*) *#	որ որ	*41* *41* *41*	67 (SI			ट क ट
1=NW 2=NE 3=SW 4	biggest to ec q q q	~: jt	13 2 2	×# 50	*# (*)	10 1 3 1	18 131	च T G SE	110 61	თ თ	rati rati	t (1)	(A) (D)	~1 ¹	\$ \$ \$ DZ	•	OI.	რ რ	ന ന	m	9	학 · · · · · · · · · · · · · · · · · · ·		52 52 53 54 54 54 54 54 54 54 54 54 54 54 54 54	E = = = EZ	24 1 4 1	2 등 T 등 2
are 1=NW 2=NE 3=SW 4	s biggest to Sec q q q	역 (이 (이 (이 (이 (이 (이	13 2	10W 13 4	10W 13 4	10W 18 1 3 1	10W 18 1 3 1	10K 18 3 L 4	(T) (e;Te el	en H	20 3 1	20 3 2	() 전		•	(A)	21 3 3	21 8 3	21 8 3	(1) (2)		ei ei	OI.	ტ ტ	OI	OI.
are 1=NW 2=NE 3	rs are biggest to Rng Sec q q q	ા ભ ભ	10W 13 2	,_,	29N 10W 13 4		29N 10W 18 1 3 1	00 r=1	et Mot	6T MOT	el mol	20 3 1	10W 20 3 2	10W 20 4		S	21 3 2	108 21 33	10W 21 3 3	21 44 33	21 4 3	MOT	100 21	M M	ტ ტ	100 2	OI.

PUD Number
RG 36732 DCL
SJ 00785 S
SJ 00785 S
SJ 00785 NEW
SJ 00785 S-2
SJ 03023
SJ 03023
SJ 03081
SJ 03081
SJ 03081
SJ 03081
SJ 03081
SJ 02900
SJ 02900
SJ 02900
SJ 02940
SJ 03535
SJ 03456
SJ 03456
SJ 03470
SJ 03480
SJ 03806

SJ 00092	29M		ep OI	-: (F	(SI				က္က		
SJ 02802	M62		97 98 OI	;-1 ∞	61				132	Ö	102
SJ 02907	Nes S	100	*# 6d	(A)	90				9		
SJ 02122	N8/2	101	10	I					99	걸	99 98
SJ 01019	X T C		to 61	99 	m				9	ષ્ય	(Q) Viji
SJ 01056	NG SI	101	(N	61 62					8	I	on H
SJ 02216	ME 0		(S)	তা —					8	ŗ÷.	N 89
SJ 03582	以 (2)		(1) (0) (3)	eo 	m				្ន	~it	<u>ر</u> پ
SJ 02151	NEZ		60 60 61	I	СI	×	0000000	2075600	r~ m	20	17
SJ 03652	N82		60 60 61	(M	1				**** ****	ųρ	60 61
SJ 03142	29N		00	(N	64				00 60	ଷ୍ଟ	ю Н
SJ 03637	260 0		64 69	69 64	,t				21	្ម	=
SJ 03582 POD2	293		00 (N	(f)	(Y)				61 00	н)	60 63
SJ 02840	29N		00 (N	~# ~~	1				10)	ଧ ୧୨	დ (N
SJ 00506	NES S	101	00 (s)	99					00 (*•	10) 10)	N 89
SJ 00662	ME O		03 03	est.	m				(Y) (T)	70	(S)
SJ 00497	NES		on Oil	61	m				10) 00	in m	e G
SJ 03777 POD1	<u>화</u> 용진		т 61	-st	est		270344	2071311	190	0.0	00
SJ 00473	N62		30	<# 64					(i)	្ឋ	90 SP
SJ 03743 POD1	N62	MOT	9	<#	00				0.64°	140	000
SJ 01051	NES	LOW	 	(N	OI.				9	0 8	3
SJ 01050	100 100 100 100 100 100 100 100 100 100	101	(o (o	<# 1					u) 00	00 00	[~ KII

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 28 Range: 084 Sections: 34.5.5.7.8.9.10

WATER COLUMN REPORT 10/24/2008

	(quarters	are	1=1	13 13		(quarters are 1=NW 2=NE 3=SW 4=SE)						
	(quar ters	are	bžď 4	9	î. t	(quarters are biggest to smallest)			Depth	Depth	Water	Water (in feet)
POD Number	Twa	Rag	Sec	ה ה	Ď,	Zone	×	×	Well	Water	Column	
SJ 02369 CLW	2 条60	00 Mino	(O)	<u>ы</u>	-; p				ტ ლ	9	e)	
SJ 02376	然 多(5)	90 KKO	(O)	ed OI	e p				۳ ۳	9	(9)	
SJ 02369	26 0 0	(A)	(r) (c)	en en	ф				ତା ୧୨			
SJ 02103	器 (i)	技術の	8	e) e)					.=1 (-)	5p	[~ -1	
SJ 01494	2 (1)	Mr. o	(r) (c)	04					린	10)	r~	
SJ 03300	% 61	No.	(r) (c)	(A)	GI.				(s)	zh.	1	
SJ 03362 POD2	然後的	ME 0	(d) (d)	61 61	кф				() 전	ųρ	11) 1	
SJ 03362	%50 	(A)	(O)	ья 64	sp 				ai to	01 1	(d	
SJ 02567	% (A) (A)	18E-0	(*) (*)	CA .a.	۰~۱				←†	ભ	6si 1	
SJ 03200	26 O	ME 0	(d)	m 69	·~1				e) e)	⊖ i	11) 1	
SJ 02946	2% (F)	(A)	(d) (C)	याः छा	1			-	(B)	ş	11) 11)	
SJ 03490	860 	T.	er O	·~!	en				থে গ্ৰ	9	हा हा	
SJ 03491	25 O	E.	ক ত	;-1	(*)				en P			
SJ 03566	25 (A) (D)	64.0 0	다 ()	-i	<p< th=""><th></th><th></th><th></th><th>(i)</th><th></th><th></th><th></th></p<>				(i)			
SJ 03531	29%	850	<u>ن</u> دار	-1	(=1				90			
SJ 03530	%6 O	(A)	*# 		·~1				(a) (d)			
SJ 03466	88 00	(%) (*)	*** ****	64 64	0				্ ক			
SJ 02554	ж ө ө	(3) (3)	5P	64	sp				ლ ლ	10	w	
SJ 03118	(名)() ()	(A.E.)	(i) (i)	oi oi	0				(5) (6)			
SJ 03092	26.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00	E.	(i) (i)	ران اب	eri				ा दाः	ųp ed	হাণ (গ	
SJ 03182	%60 0	REO	10 C	4:12 1-11	·=1				থে আ	(),) ;=1	च (N	
SJ 03599	%60 	(A.E.O.	(i)	اله اله	·=1				લ્વ જા	20	61 61	
SJ 00584	然 的	深 ()	10	10 10					€5 50 50 5-1	<u>-</u>	000	
SJ 00785	20 o	(S.E.)	Č	rar (O	rsj				(2) (2)			
SJ 03389	86 8	8.E.O	i~	el.	64				61 121			
SJ 03536	%6 U	深 点の	i~	eth. Ath	M				on est	(g)	(i) 1	
SJ 01176	2.9%	850 0	ω Θ	1					©((1)) (-1)	-10 -10	Ф Ф	

를 12 학 10 10 년 연 년

를 확 보 10 를 N 러

er (0) er et (0)

ан өн а

New Mexico Office of the State Engineer POD Reports and Downloads

Township: | 28h Range: | 050 | Sections: |

WAITER COLUMN REPORT 10/30/2008

	Depth	Water	190 40 150	 [-
		¥		
(quarters are 1=NW 2=NE 3=SW 4=SE)	(quarters are biggest to smallest)	Tws Rng Sec q q q Zone X	28N 09W 20 123	(m)
		PCD Number	SJ 03746 PCD1	SJ 00018

New Mexico Office of the State Engineer POD Reports and Downloads

ı		Suffix:	Non-Domestic C Domestic 6 All
	Search Radius:	Number:	Non-Domestic
Township: Zib Range: 101 Sections:	Zone:		(Last)
p: Zrb Ran		Basin:	
Townshi	NAD27 X: [•	Owner Name: (First)
		County:	Owner N

POD / Surface Data Report Avg Depth to Water Report Water Column Report

0000/00/00	2017/00/00
600000	2
566	
Q (1)	44.44

are 1=NW 2=NE 3=SW 4=SE) are bidgest to smallest)	the Sec q q q Zone X Y Well Water Column	(i)	10% 08 2 2 3	
are 1=	ng Sec	20 E	80 M	90 M
quarters	Tws R	를 됐는데 대	A 200	1 27% L

Record Count: 3

New Mexico Office of the State Engineer POD Reports and Downloads


Township: 77 Range: 110 Sections:

POD / Surface Data ReportAvg Depth to Water ReportWater Column Report

WATER COLUMN REPORT 10/30/2008

Depth Depth Water (in feet)	X Y Well Water Column 650	3102 550 552
quarters are 1=NW 2=NB 3=SW 4=SE) quarters are biggest to smallest)	Tws Rng Sec q q q Zone	2736 1139 26 2 1 3
	POD Number SJ 01787	SJ 00017

Record Count: 2

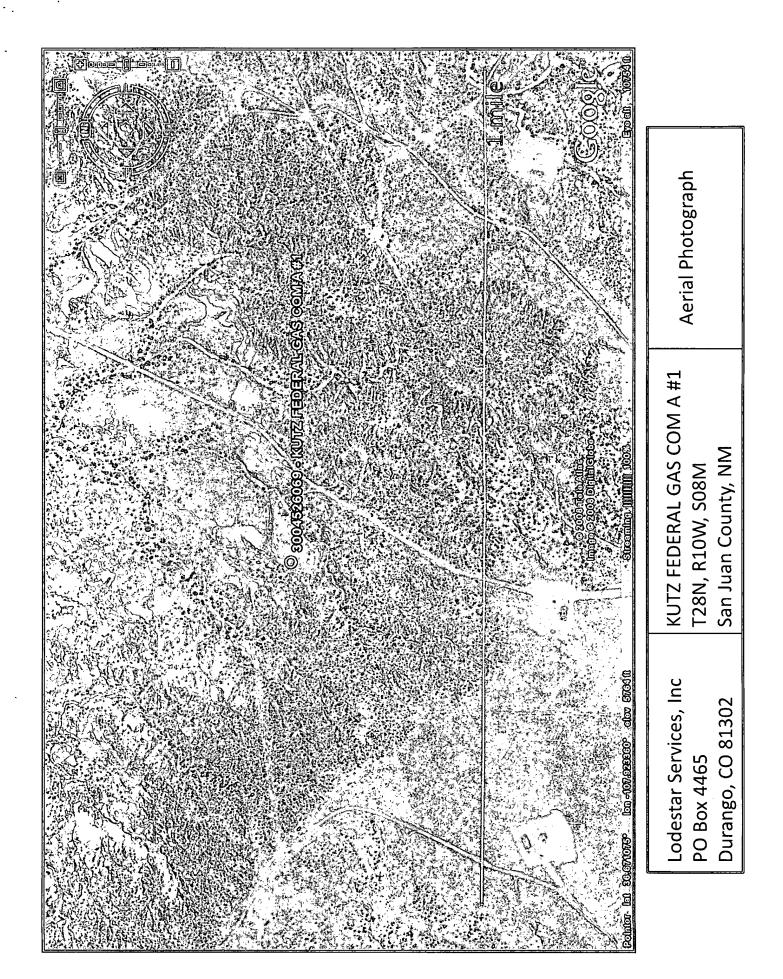




KUTZ FEDERAL GAS COM A #1 T28N, R10W, S08M

Mines, Mills, and **Quarries Map**

Lodestar Services, Inc PO Box 4465 Durango, CO 81302

San Juan County, NM

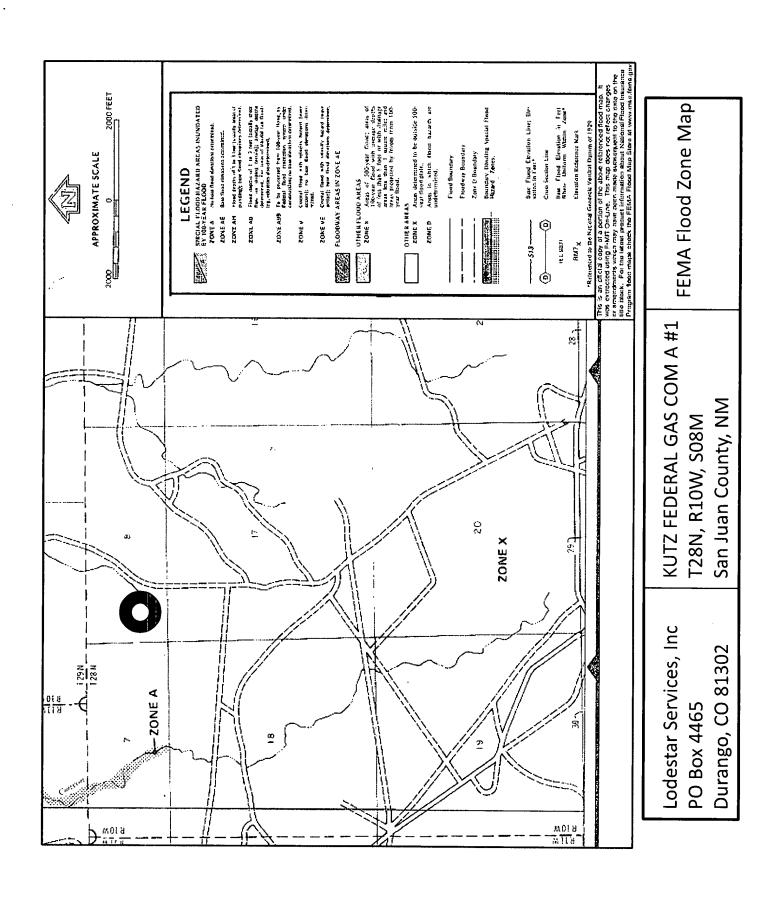

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Design and Construction Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.11 NMAC the following information describes the design and construction of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.


General Plan

- 1. XTO will design and construct below-grade tanks to contain liquids and solids and prevent contamination of fresh water and protect public health and environment.
- 2. XTO will post a well sign, in compliance with 19.15.3.403 NMAC, on the existing well site operated by XTO where the existing below-grade tank is located. The sign will list the Operator on record as the operator, the location of the well site by unit letter, section, township, range, and emergency telephone numbers.
- 3. XTO is requesting approval of an alternative fencing to be used on below-grade tank locations. Below-grade tank locations will be fenced utilizing 48" steel mesh field-fence (hogwire) with pipe railing along the top. A 6' chain link fence will be utilized around the well pad if the well site is within a city limits or ¼ mile of a permanent residence, school, hospital, institution or church. Below-grade tanks located within 1000' of a permanent residence, school, hospital, institution or church will be fenced by 6' chain link fence with at least two strands of barbed wire at the top. All gates associated with below-grade tanks will remain closed and locked when responsible individuals are not on site.
- 4. XTO shall construct below-grade tanks with an expanded metal covering or solid vaulted top on the top of the below-grade tank.
- 5. XTO will ensure that below-grade tanks are constructed of materials resistant to the below-grade tank's particular contents and resistant to damage from sunlight. Tanks will be constructed of A36 carbon steel with 3/16" sides and ¼" bottom. (See attached drawing).
- 6. The below-grade tank system will have a properly constructed foundation consisting of a level base free of rocks, debris, sharp edges or irregularities to prevent punctures, cracks or indentations of the liner or tank bottom. Sand bedding (4") will be placed on top of a level foundation to ensure prevention of punctures, cracks or indentations of the liner or tank bottom.
- 7. XTO will construct a berm and/or diversion ditch in a manner that prevents the collection of surface water run-on. Below-grade tanks will be equipped with automatic high level shut-off devices as well as manually operated shut-off valves. (See attached drawing).
- 8. XTO will construct and use below-grade tanks that do not have double walls. The below-grade tank sidewalls will be open for visual inspection for leaks. The sidewalls of the cellar will be constructed with 2" X 12" pine sidewalls and 4" X 4" pine brace posts. The below-grade tank

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Design and Construction Plan For Below-Grade Tanks Page 2

bottom will be elevated a minimum of 6" above the underlying ground surface and the below-grade tank will be underlain with a geomembrane liner to divert leaked liquid to a location that can be visually inspected. (See attached drawing).

- 9. XTO will equip below-grade tanks designed in this manner with a properly functioning automatic high-level shut-off control device and manual controls to prevent overflows. (See attached drawing).
- 10. XTO will demonstrate to the OCD that the geomembrane liner complies with the specifications of Subparagraph (a) of Paragraph (4) of Subsection I of 19.15.17.11 NMAC and obtain approval from OCD prior to the installation of the design. The geomembrane liner shall have a hydraulic conductivity no greater than 1 x 10-9 cm/sec. The geomembrane liner shall be composed of an impervious, synthetic material that is resistant to petroleum hydrocarbons, salts and acidics and alkaline solutions. The liner material shall be resistant to ultraviolet light. Liner compatibility shall comply with EPA SW-846 method 9090A. (See attached drawing).
- 11. The general specifications for design and construction are attached.

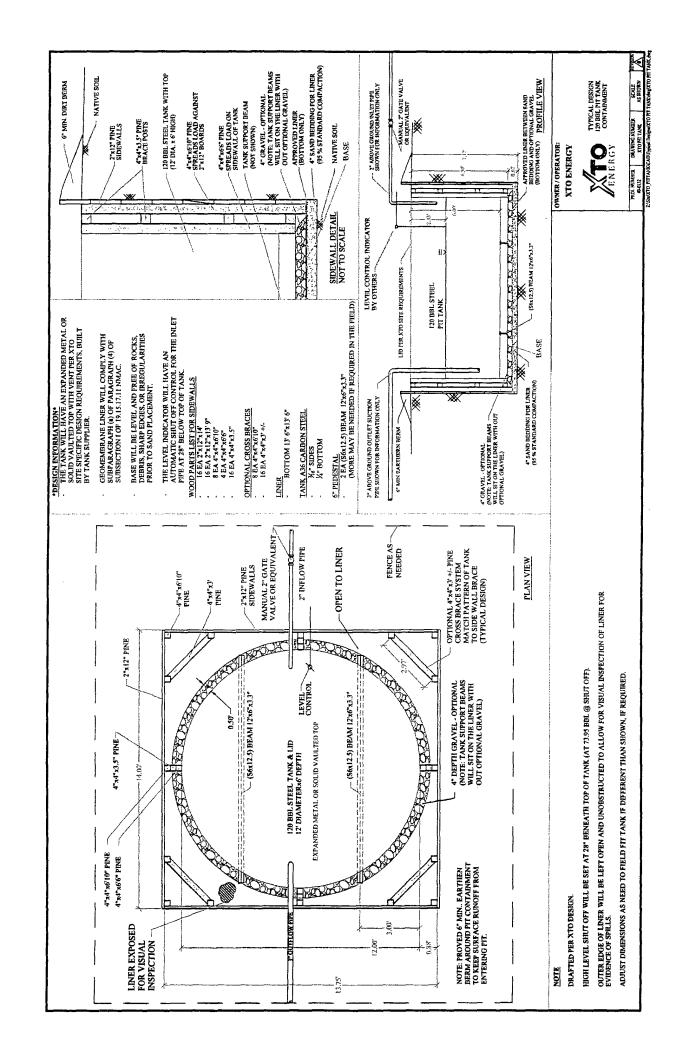

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Maintenance and Operating Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.12 NMAC the following information describes the operation and maintenance of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

- 1. XTO will operate and maintain below-grade tanks to contain liquids and solids, maintain the integrity of the liner and secondary containment system, prevent contamination of fresh water and protect public health and the environment. Fluid levels will be monitored weekly and high levels will be removed as necessary. Monthly inspections will be conducted to monitor integrity of below-grade tank systems and below-grade tanks will be equipped with automatic high-level shut-off devices.
- 2. XTO will not allow below-grade tanks to overflow and will use berms and/or diversion ditch to prevent surface run on to enter the below-grade tank. Below-grade tanks will be equipped with automatic high-level shut-off control devices as well as manually operated shut-off valves. See attached drawing for vault design and placement of diversion berms and shut-off devices.
- 3. XTO will continuously remove any visible or measurable layer of oil from the fluid surface of below-grade tanks in order to prevent significant accumulation of oil.
 - 4. XTO will inspect the below-grade tank monthly and maintain written records for five years. Monthly inspections will consist of documenting the following: (see attached template),

Well Name

API#

Sec., Twn., Rng.

XTO Inspector's name

Inspection date and time

Visible tears in liner

Visible signs of tank overflow

Collection of surface run on

Visible layer of oil

Visible signs of tank leak

Estimated freeboard

- 5. XTO will maintain adequate freeboard to prevent over topping of the below-grade tank. High level shut-off devices control the freeboard at an average of 28" beneath the top of the tank.
- 6. XTO will not discharge into or store any hazardous waste in any below-grade tank.
- 7. If a below-grade tank develops a leak, or if any penetration of a below-grade tank occurs below the liquids surface, XTO will remove all liquids above the damage or leak line within 48 hours,

XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Maintenance and Operating Plan
For Below-Grade Tanks
Page 2

notify the appropriate division district office within 48 hours of the discovery and repair the damage or replace the below-grade tank. If an existing below-grade tank does not meet current requirements of Paragraphs 1-4 of Subsection I of 19.15.17.11 NMAC the tank will be modified or retrofitted to comply. If compliance can not be achieved XTO will implement the approved closure plan.

		MONTH	1LY BELO	MONTHLY BELOW GRADE TANK INSPECTION FORM	INSPECTION	N FORM		
Well Name:					API No.:			
Legals	Sec:		Township:		Range			
XTO Inspector's	Inspection	Inspection	Any visible liner	Any visible signs of	Collection of surface	Visible layer	Any visible signs	Freeboard
Name	Date	Ime	tears (Y/N)	tank overflows (Y/N)	run on (Y/N)	of oil (Y/N)	of a tank leak (Y/N)	Est. (ft)
Notes:	Provide Det	Provide Detailed Description:	otion:			3		
,	•							
Misc.	·							
	•							
	•							
,	•							