

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

SF 078432

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

HODGES

9. WELL NO.

4

10. FIELD AND POOL, OR WILDCAT

BALLARD PICTURED CLIFFS

11. SEC. T., R., M., OR BLM. AND
SURVEY OR AREA

Sec. 27, T-26N, R-8W,
R.M.P.N.

12. COUNTY OR PARISH

SAN JUAN

13. STATE

NEW MEXICO

1.

OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR

SOUTHERN UNION PRODUCTION COMPANY

3. ADDRESS OF OPERATOR

P. O. Box 808, FARMINGTON, NEW MEXICO 87401

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)

At surface 1770 FT. FROM NORTH LINE AND 1770 FT. FROM EAST LINE

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

6879 FT. R.K.B.

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

(Other)

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

ABANDON* ☐

CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐

FRACTURE TREATMENT ☐

SHOOTING OR ACIDIZING ☐

(Other)

REPAIRING WELL ☐

ALTERING CASING ☐

ABANDONMENT* ☐

TEMPORARILY ABANDON ☒

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. RIGGED UP PULLING UNIT JULY 19, 1967. PULLED 1" TUBING.


2. RAN CEMENT BOND LOG FROM 225 FT. TO 2497 FT. R.K.B.
INDICATED TOP OF CEMENT 1800 FEET R.K.B.

3. SET 5-1/2" MODEL "N" BAKED BRIDGE PLUG AT 2500 FT. R.K.B. PRESSURE TEST PLUS
AND CASING TO 1000 PSI FOR 10 MIN. TEST OK.

4. PERF 5-1/2" CASING 2 SHOTS PER FT. IN FOLLOWING INTERVALS: 1168-1173 FT., 1235-1240 FT.,
1330-1335 FT., 1505-1510 FT., 1560-1565 FT., 1625-1630 FT., AND 1730-1740 FT. R.K.B.

5. RAN 5-1/2" CASING PUMP AND MOBS. SET PUMP AT 912 FT. R.K.B., SET PUMP JACK.

6. TEMPORARILY ABANDONED PICTURED CLIFFS GAS ZONE AND RECOMPLETED AS AJO ALAMO WATER WELL
ON JULY 30, 1967.

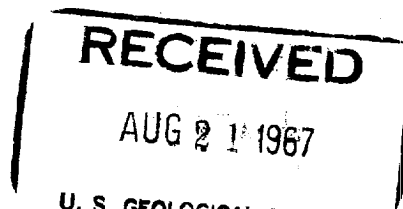

18. I hereby certify that the foregoing is true and correct
Original signed by

SIGNED GILBERT D. NOLAND, JR.
GILBERT D. NOLAND, JR.

TITLE DRILLING SUPERINTENDENT

DATE AUGUST 14, 1967

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

U.S. GOVERNMENT PRINTING OFFICE: 1963-O-485229
947-851

