

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐
well well

2. NAME OF OPERATOR

Supron Energy Corp. % John H. Hill, et al

3. ADDRESS OF OPERATOR Suite 020, Kysar Building
300 W. Arrington, Farmington, New Mexico 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 1520' FNL & 1120' FWL (SW NW)

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

☒
☐
☐
☐
☐
☐
☐
☐
☐
☐

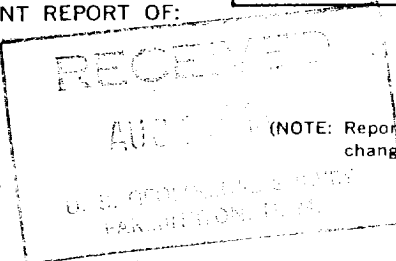

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. Total Depth, 7 7/8" hole. Drilled to 3100'.
2. Ran 101 jts. (3083.81') of new 2 7/8", 6.4#, J-55, R-2 NUE tubing.
3. Set and cemented at 3095.81' RKB.
4. B.J. Hughes cemented with 775 sx. 50/50 Poz, 6% Gel, 1/2 Cu.Ft. Perlite/sk. Followed with 150 sx. Class "B" cement. Circulation good throughout job. Circulated 5 barrels cement.
5. Test water shut-off at 2000 PSI. Job completed at 4:00 P.M., 8/15/81.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Norman V. Wallis TITLE Exploration/Development Superintendent DATE August 18, 1981

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

AUG 20 1981

*See Instructions on Reverse Side

INMOCC

BY EJG FARMINGTON DISTRICT