

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

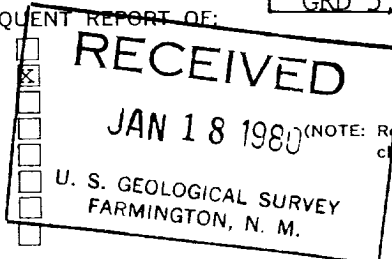
1. oil ☐ gas ☒ other ☐2. NAME OF OPERATOR
Energy Reserves Group, Inc.3. ADDRESS OF OPERATOR
P.O. Box 3280, Casper, Wyoming 826024. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 800' FSL, 1640' FWL (SE/SW)
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

5. LEASE
SF-078109

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME
Gallegos Canyon Unit8. FARM OR LEASE NAME
Gallegos Canyon Unit9. WELL NO.
28910. FIELD OR WILDCAT NAME
Kutz Pictured Cliffs, West11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 8-T28N-R12W12. COUNTY OR PARISH
San Juan13. STATE
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
GRD 5,796' KB 5,806'

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Pictured Cliffs sand perfed 1,664'-69'; 1,673'-76' w/1 JSPF.
Broke down perfs w/500 gals 15% HCl + additives. Fraced
perfs w/24,000 gals 70% Quality Foam + 40,000# 10-20 sand
@ 2 PPG.

Subsurface Safety Valve: Manu. and Type

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

Alan B. Barnes

TITLE

Dist. Prod. Engr. RMD

DATE

JAN 14 1980

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

NMOC