SUBMIT IN TRIPLICATE.

(Other instructions on reverse side)

Form approved. Budget Bureau No. 42-R1425.

UNITED STATES DEPARTMENT OF THE INTERIOR

	GEOLG	OGICAL SURVEY			5. LEASE DESIGNATION AND SERIAL NO.
4 550 16 4 710 1			20511 00 01110		SF-078502 6. IF INDIAN, ALLOTTEE OR TRIBE NAME
	4 FOR PERMIT	TO DRILL, DEE	PEN, OR PLUG E	BACK_	
1a. TYPE OF WORK	LL X	DEEPEN [PLUG BA	CV []	7. UNIT AGREEMENT NAME
b. Type of wall	LL (A)	DEEPEN [PLUG BA	CK 🗀 .	ROYE POST PER
OIL G	ELL X OTHER		SINGLE MULTIE	LE .	S. FARM OR LEASE NAME
2. NAME OF OPERATOR					Vandewart
Tenneco Oil	Company			٠	9. WELL NO.
3. ADDRESS OF OPERATOR					2 5 2 15 5 5 5 5
720 S. Color	ado Blvd., Den	ver, Colorado	80222	<u> </u>	10. FIELD AND POOL, OR WILDCAT
4. LOCATION OF WELL (Re At surface			y State requirements.";		Basin Dakota
↓ 1075'	FNL, 810' FEL			3	11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
At proposed prod. 2011	e			Ĭ.	D ha s t bh
14. DISTANCE IN MILES	AND DIRECTION FROM NEA	REST TOWN OR POST OF	FICE*		Sec. 11, T29N, R8W
See Point lE	3, Surface Use	Plan.		Ja.	[d] 4 × − 3 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1 × − 1
15. DISTANCE FROM PROPU		16.	NO. OF ACRES IN LEASE		San Juan New Mexico
PROPERTY OF LEASE L	INE, FT.		•		#IS WELL = / 320.0
(Also to mearest drig	OSED LOCATION*	19.	PROPOSED DEPTH		BY OR CABLE TOOLS
TO NEAREST WELL, DO OR APPLIED WOR, ON THE	RILLING, COMPLETED, IS LEASE, FT.		7630	_	Rotary
21. ELEVATIONS (Show who	ther DF, RT, GR, etc.)			, 5	22. APPROX. DATE WORK WILL START*
		6324 G.L.			December 15, 1979
23.		PROPOSED CASING A	ND CEMENTING PROGR.	AM g	
SIZE OF HOLE	BIZE OF CASING	WEIGHT PER FOOT	BETTING DEPTH		QUANTITY OF CEMENT
13 3/4"	9 5/8"	36#	250	Suff.	to circulate to surface
7 7/8"	4 1/2"	10.5# - 11.6#	7630'	Suff.	to circulate to surface.
					흥 회사 이 특별회 (삼청구의 활기)
	l	1	•	* 1 E	
SEE ATTACHED	· ·	4 4			1、1441 - 夏春文 用设备
		. // //	1/-1		[청 역사] [월 불편 - 위원링
	- n	. not elect	when	5	[위원] 등 출생 - 1731년 · · · · · ·
•		e not ded	· .	";; 	连海鲈 直接员 留言的
			* . ⁵)	i.c 191	
				M S B	
			•		
			•	٤.	
			•	altite	I SEPA
				Ŋ.	TOE COST
				10 E	E TOWN COM!
IV ABOUR CRASH SPECTER	proboser process If	proposal is to dooper o	r plug back, give data on p	<u>. </u>	DIST 3
	drill or deepen direction		r plug back, give data on p a on subsurface locations as		
24.	· -			•.	10 1 2 2 1 5 5 5 1 5 4
1			Division Product	ion Man	ager
EIGNED		TITLE _			DATE
(This space for Feder	ral or State office use)				
PERMIT NO.			APPROVAL DATE	5	
			71 A 10 1 10 1 10 10 10 10 10 10 10 10 10 10		1940 A. C. C. C. C. C. C. S. H.
APPROVED BY		TITLE	·····	· · · · · · · · · · · · · · · · · · ·	DATE
CONDITIONS OF APPROV	AL, IF ANY:				
oh Fra	1				
on su					• • •

*See Instructions On Reverse Side

OIL CONSERVATION DIVISION

STATE OF NEW MEXICO **ENERGY AND MINERALS DEPARTMENT**

1820 1850

1980 2310

P. O. BOX 2088 SANTA FE, NEW MEXICO 87501

Form C-102 Revised 10-1-78

All distances must be from the cuter boundaries of the Section. Legse TENNECO OIL COMPANY VANDEWART Section Township Range County Unit Letter 8w 29N San Juan Actual Footage Location of Well: 810 1075 feet from the North line and feet from the East Dedicated Acreage: Ground Level Elev. Producing Formation Pool Dakota Basin Dakota 320 6324 1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below. 2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty). 3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling. etc? If answer is "yes," type of consolidation __ X No Yes If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.). No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commis-CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. י018 Name Environmental Coordinate Tenneco Oil Company CONOCO Aügust 31, 1979 TENNECO OIL CO. Sec. SF-078502 11 I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief. 3950

1. The geological name of the surface formation is Tertiary San Jose

2%3. Estimated Formation Tops:

Ojo	2017	Mancos	5314'
Pictured Cliffs	3014'	Gallup	6438'
Cliffhouse	4722'	Greenhorn	7234'
Menefee	4798'	Dakota A	7409'
Point Lookout	5170'	Total depth	7639 '

- 4. Drill a 13 3/4" hole to 300[±]. Run 9 5/8", 36#, K-55 ST&C casing to 300[±] and circulate cement to surface using 2% CaCl₂ in cement. Drill out shoe and reduce hole to 8 3/4". Drill 8 3/4" hole to 3500[±]. Run 7", 23#, K-55 ST&C casing to 3500[±] and circulate cement to surface. Drill out of 7" with 6 1/4" bit using gas as circulating fluid. Drill to total depth.. If productive, run 4 1/2" casing. Cement in one stage and bring cement to above Mesaverde Zone. If nonproductive, P&A as per U.S.G.S. re-
- Blowout Preventors:

 Hydraulic double ram, 10". One set of rams will be provided each size drill pipe in the hole. One set of blind rams at all times. Fill line will be 2", kill line will be 2", choke relief line will be 2". BOP's, drills, and tests will be recorded in the driller's log. BOP will be tested every 24 hours and recorded in IADC log.
- 6. Mud Program: (Sufficient quantity of mud and weight material will be available on location.)

0-300⁺
300-3500Low solids fresh water mud. No WL control.
3500-T.D.
Gas.

7. Auxiliary Equipment:

- a. Kelly cock will be in use at all times.
- b. Stabbing valve to fit drill pipe will be present on floor at all times.
- c. Mud monitoring will be visual. No abnormal pressures are anticipated.
- d. Floats at bits.
- e. Drill string safety valve(s) to fit all pipe in drill string will be maintained on the rig floor while drilling operations are in progress.
- 8. Coring, Logging, and Testing Program:

No cores will be taken. Samples will be taken as directed by wellsite geological engineer. GR/FDC/CNL caliper from T.D. to base of Mesaverde. GR/SP/SN induction from T.D. to surface casing.

- 9. No abnormal pressures or temperatures are anticipated.
- 10. The drilling of this well will take approximately
- 11. Your office (telephone) will be notified of spudding in sufficient time to witness cementing operations. Immediate notice will be given on blowouts, fires, spills, and accidents involving life threatening injuries or loss of life. Prior approval will be obtained before appreciably changing drilling program or commencing plugging operations, plug back work, casing repair work or corrective cementing operations.

1. Existing Roads

- A. Proposed Well Site Location: The proposed wellsite location was surveyed and staked by a registered land surveyor and is located 1075 FNL and 810' FEL Sec. 11, T29N-R8W, San Juan County, New Mexico. (See Exhibit I acreage dedication plan).
- Planned Access Route: Planned access route begins in Blanco, New Mexico and proceeds east on Highway 64 for approximately 11 miles. Turn north on to dirt road and proceed for 1 mile to the wellsite location. (See Exhibit II).
- C. Access Road Labelled:

Color Code: Red - Improved Surface Blue - New Access Road

- D. Not applicable the proposed well is a development well.
- E. The proposed well is a development well. See Exhibit II for existing roads within a one mile radius.
- F. Existing Road Maintenance or Improvement Plan:
 The existing roads will require minimal maintenance.

2. Planned Access Roads

(All roads are existing roads.)

A. Width:

The average width of the road is twenty feet.

B. Maximum Grades:

The maximum grades will be 6%.

- C. Turnouts:
 There are no turnouts planned as sight distance is sufficient.
- D. Drainage Design: The road is center crowned to allow drainage. The road is flat primarily.
- E. Culverts Use Major Cuts and Fills:

No culverts or major cuts and fills will be required.

F. Surfacing Material:
Native soil has been wetted, bladed and compacted to make the road surface, which is existing.

- 2. Planned Access Roads (Cont'd)
 - G. Gates, Cattleguards, Fence Cuts: No gates, cattleguards or fences will be needed.
 - Н. New Roads Centerlined Flagged: Existing Roads.
- 3. Location of Existing Wells

The proposed well is a development well. Exhibit IIIshows existing wells within a one mile radius.

- Α. Water Wells:
- В. Abandoned Wells: None.
- С. Temporarily Abandoned Wells: None
- D. Disposal Wells: None
- E. Drilling Wells: See Exhibit III
- F. Producing Wells: See Exhibit III
- Shut-In Wells: None. G.
- Η. Injection Wells: None,
- I. Monitoring or Observation Wells: None.
- 4. Location of Existing and/or Proposed Facilities
 - Α. Existing facilities within one mile owned or controlled by Lessee/Operator:
 - Tank batteries None
 - Production facilities See Exhibit III
 - (2) (3) Oil Gathering Lines -None
 - (4) Gas Gathering Lines -None
 - Injection Lines -None
 - Disposal Lines -None

- New facilities in the event of production: В.
 - (1) New facilities will be within the dimensions of the drill pad.
 - (2) Dimensions are shown on Exhibit IV.
 - Construction Materials/Methods: : Construction materials will be native to the site. Facilities will consist of a well pad.
 - (4) Protection of Wildlife/Livestock:

Facilities will be fenced as needed to protect wildlife or livestock.

4. Location of Existing and/or Proposed Facilities (Cont'd)

- B. New facilities in the event of production: (cont'd)
 - (5) New facilities will consist of a wellhead, tank and production unit.
- C. Rehabilitation of Disturbed Areas:
 Following the completion of construction, those areas required for continued production will be graded to provide drainage and minimize erosion. Those areas unnecessary for use will be graded to blend with surrounding topography per BLM recommendations.

Location and Type of Water Supply

- A. Location and type of water supply:
 Water will be hauled from a private source.
- B. Water Transportation System: Water trucks will be used.
- C. Water wells: N/A.

6. Source of Construction Materials

- A. Materials:
 Construction materials will consist of soil native to the site. Any topsoil, if present, will be stripped and stockpiled as needed.
- B. Land Ownership;
 The planned site and access road is on federal land administered by the Bureau of Land Management.
- C. . Materials Foreign to the Site: N/A.
- D. Access Roads: No additional roads will be required.

7. Methods for Handling Waste Disposal

- A. Cuttings:
 Cuttings will be contained in the reserve pit.
- B. Drilling Fluids: Drilling fluids will be retained in the reserve pit.
- C. Produced Fluids:
 Produced fluids, including produced water will be collected in the reserve pit. Any small amount of hydrocarbon that may be produced during testing will be retained in the reserve pit. Prior to clean up operations, the hydrocarbon material will be skimmed.

7. Methods for Handling Waste Disposal (Cont'd)

- D. Sewage:
 Sanitary facilities for sewage disposal will consist of at least one pit toilet, during the driller operations.
 The pit will be backfilled immediately following completion of the drilling operation.
- E. Garbage:
 There probably will not be much putriscible garbage to dispose of. However, it will be disposed of along with the refuse in a constructed burn pit, which will be fenced.
 The small amount of refuse will be burned and the pit will be covered with a minimum 36 inch cover upon completion.
- F. Clean-Up of Well Site:
 Upon the release of the drilling rig, the surface of the drilling pad will be prepared to accommodate a completion rig, if testing indicates potential productive zones. In either case, the "mouse hole" and "rat hole" will be covered to eliminate a potential hazard to livestock. The reserve pit will be fenced to prevent entry of livestock until the pit is backfilled. Reasonable clean up will be performed prior to final restoration of the site.

8. Ancillary Facilities

None required.

9. Well Site Layout

- A. See Exhibit IV
- B. Location of pits, etc. See Exhibit IV
- C. Rig orientation etc. See Exhibit IV
- D. Lining of pits:
 Pits will not be lined. They will be covered with a fine
 mesh netting, if necessary, for the protection of wildlife
 if fluids are found to be toxic.

10. Plans for Restoration of Surface

A. Reserve pit clean up:
The pit will be fenced prior to rig release and shall be maintained until clean up. Prior to backfilling any hydrocarbon material on the pit surface will be removed. The fluids and solids contained in the pit shall be backfilled with soil excavated from the site and with soil adjacent to the reserve pit. The restored surface of the reserve pit will be contoured as needed to minimize erosion. The reserve pit area will be seeded per BLM recommendations during the appropriate season following final restoration of the site.

10. Plans for Restoration of Surface (Cont'd)

- B. Restoration Plans Production Developed:
 The reserve pit will be backfilled and restored as described under Item A. In addition, those disturbed areas not required for production will be graded to blend with the surrounding topography, and seeded, per BLM recommendations. The portion of the drill pad required for production and turning areas will be graded to minimize erosion and provide access to production facilities under inclement conditions. Following depletion and abandonment of the site, restoration procedures will be those under Item C. below.
- C. Restoration Plan No Production Developed:
 The reserve pit will be restored as described above. With no production developed, the entire surface disturbed by construction of the drilling pad will be restored. The site will be contoured to blend with the surrounding topography. The site will be seeded according to BLM recommendations. If the new access road is not required for other development plans, it will be obliterated and restored and seeded per BLM recommendations.
- D. Rehabilitation Time Table:
 Upon completion of operations the intial clean up of the well site will be performed. Final restoration of the site will be performed as soon as possible according to procedural guidelines published by the USGS and BLM. Seeding of the disturbed areas which are no longer required will be performed during the appropriate season, following final restoration.

11. Other Information

- A. Surface Description: The surface description of the proposed wellsite location is located approximately 2 1/2 miles northeast of Manzanares Canyon. Terrain consists of sandy soil and sagebrush.
- B. Surface Use Activities:
 The surface is federally owned and managed by the BLM. The predominant surface use is mineral exploration and production.
- C. Proximity of Water, Dwellings and Historical Sites:
 - 1. Water:
 There are no reservoirs or streams in the immediate area.
 - Occupied Dwellings: There are no occupied dwellings or buildings in the area.
 - 3. Sites:
 An archeological reconnissance has been performed for this location and clearance has been granted.

12. Operator's Field Representative

Donald S. Barnes
Division Drilling Engineer
Tenneco Oil Company
720 South Colorado Blvd.
Penthouse
Denver, CO 80222
(303) 758-7130 Ext. 212


13. <u>Certification</u>

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions as they actually exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the proposed work performed by Tenneco Oil Company and its contractors and subcontractos will conform to this plan.

Date:	9.4.79	**	of an funny
	••"		J. M. Lacey

Division Production Manager

UNITED STATES DEPARTMENT OF THE INTERIOR GEOLOGICAL SURVEY 35°45' 2 080 COO FEET Vicinity Map for EXHI TENNECO OIL COMPANY #1 Vandewart 1075'FNL 810'FEL Sec 11-T29N-R8W SAN JUAN COUNTY, NEW MEXICO EXHIBIT II

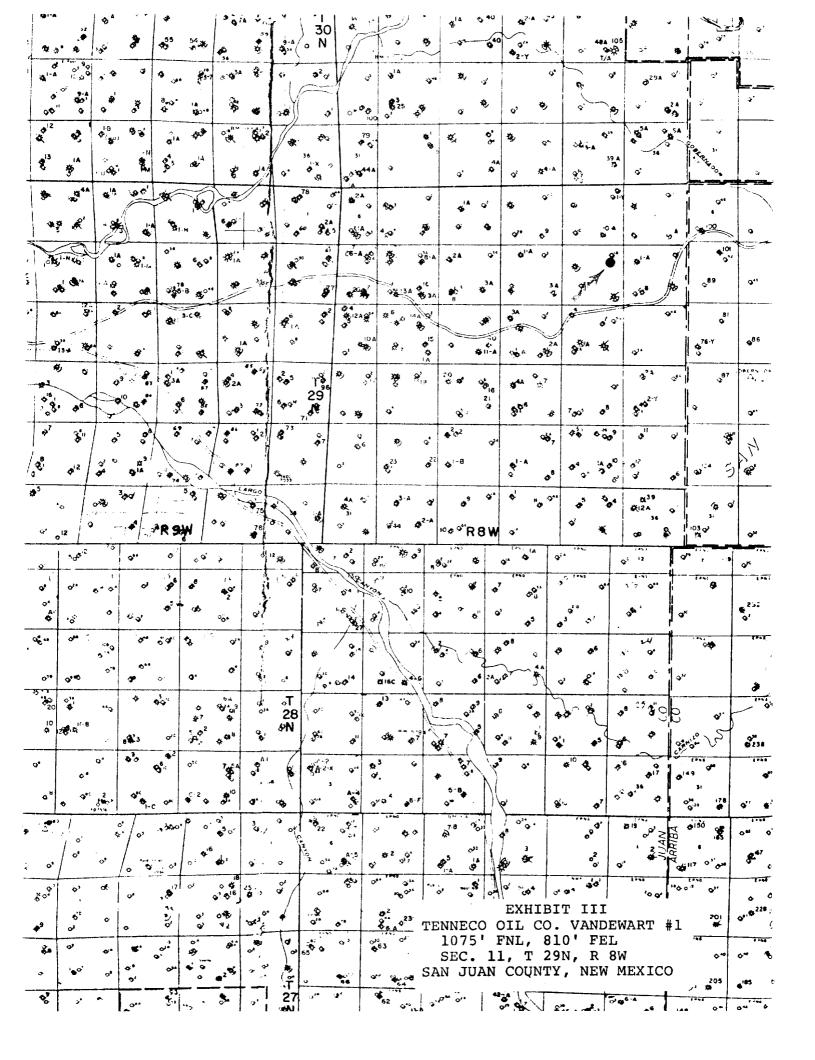

TENNECO OIL COMPANY

CALCULATION SHEET

EXHIBIT IV DRILLING WELL SITE LAYOUT VANDEWART #1 LOCATION 1075' FNL, 810' FEL, SEC. 11, T 29N, R 8W DATE: 8-79 SAN JUAN COUNTY, NEW MEXICO 1004 F 15' F 15' BUNK RESERVE 100' PIT 135 DRILLING MUD PRESENT RIG ROAD WELL FLARE F 5' ີ 20 ັ PIPE CAT **RACKS** 175 F 10' F 10' BURN F 12 PARKING. AREA