

Form 9-331
(May 1963)UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE*
(Other instructions on reverse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

Contract 465

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

Jicarilla

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

La Corina

9. WELL NO.

35

10. FIELD AND POOL, OR WILDCAT

Wildcat

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 6, T30N, R1E

12. COUNTY OR PARISH

Rio Arriba

13. STATE

NM

1. CIL
WELL ☒ GAS
WELL ☐ OTHER

2. NAME OF OPERATOR

Dugan Production Corp.

3. ADDRESS OF OPERATOR

Box 234, Farmington, New Mexico 87401

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

330' FNL - 330' FEL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

7795' GR - 7807' RKB

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

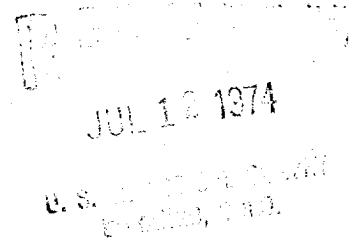
REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

6-20-74Finished moving in and rigging up. Spudded 12 1/4" surface hole at 3:00 PM, 6-19-74.
Drilling at 195'.6-21-74Drilling at 406' with water. Finished drilling 12 1/4" surface hole to 245'. Ran
11 jts (1 jt 8-5/8" 24# 8Rd ST&C casing and 10 jts 28# H-40 8Rd ST&C line pipe).
TE 228.65' set at 243.00' RKB cemented with 140 sx Class "A" neat plus 1% CaCl,
good cement to surface. POB 4:00 PM, 6-20-74. Deviation 1 1/2° at 220'.

18. I hereby certify that the foregoing is true and correct

SIGNED Original signed by
Jim L. Jacobs
Jim L. JacobsTITLE GeologistDATE 7-10-74

(This space for Federal or State office use)

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

TITLE _____

DATE _____

*See Instructions on Reverse Side