

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil well ☐ gas well ☒ other ☐  
2. NAME OF OPERATOR  
El Paso Natural Gas Company  
3. ADDRESS OF OPERATOR  
Box 289, Farmington, New Mexico 87401  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1600'S, 990'E  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

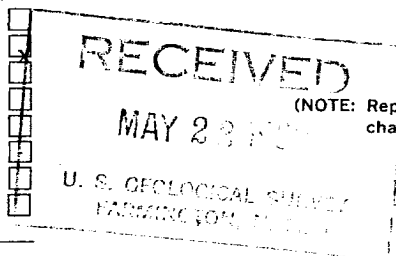

5. LEASE  
SF 080713-B  
6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
7. UNIT AGREEMENT NAME  
San Juan 30-6 Unit  
8. FARM OR LEASE NAME  
San Juan 30-6 Unit  
9. WELL NO.  
45-A  
10. FIELD OR WILDCAT NAME  
Blanco Mesa Verde  
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 15, T-30-N, R-6-W  
NMPM  
12. COUNTY OR PARISH Rio Arriba 13. STATE New Mexico  
14. API NO.  
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
6399' GL

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

5-10-80: PBDT 5962'. Tested casing to 3500#, OK Perf'd PL5558, 5564, 5570, 5592, 5598, 5616, 5622, 5628, 5670, 5684, 5708, 5764, 5812, 5820, 5827, 5850, 5900, 5908' w/1 SPZ. Fraced w/ 71,000# 20/40 sand, 204,200 gal. wtr. Flushed w/ 7540 gal. wtr.

Perfed C.H. & Men. 5226, 5241, 5246, 5273, 5288, 5297, 5303, 5342, 5348, 5447' w/1 SPZ. Fraced w/ 34,000# 20/40 sand, 99,000 gal. wtr. Flushed w/ 7200 gal. wtr.


Subsurface Safety Valve: Manu. and Type \_\_\_\_\_

18. I hereby certify that the foregoing is true and correct

SIGNED V. D. Buice TITLE Drilling Clerk DATE May 20, 1980

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:



ACCEPTED FOR RECORD

MAY 27 1980

\*See Instructions on Reverse Side

NM000

BY M. L. Kuchera