

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

1. TYPE OF WELL GAS		5. LEASE NUMBER SF-080711A
2. OPERATOR <i>Meridian</i> EL PASO NATURAL GAS CO.		6. IF INDIAN, ALL. OR TRIBE NAME
3. ADDRESS & PHONE NO. OF OPERATOR P O BOX 4289 FARMINGTON, NM 87499		7. UNIT AGREEMENT NAME SAN JUAN 30-6 UNIT
4. LOCATION OF WELL 860'S 2525'W 790 1565		8. FARM OR LEASE NAME SAN JUAN 30-6 UNIT
		9. WELL NO. 482
		10. FIELD, POOL, OR WILDCAT BASIN FRUITLAND COAL
		11. SEC. T. R. M OR BLK. SEC. 31 T30N R06W NMPM
14. PERMIT NO.	15. ELEVATIONS 6811'GL	12. COUNTY RIO ARRIBA
		13. STATE NM
16. NOTICE OF INTENTION TO: Change Plans		
17. Describe proposed or completed operations		

Attached is a revised operations plan, BOPE diagram and anticipated production facilities diagram on the subject well.

RECEIVED

APR 02 1990

OIL CON. DIV.]

EST. 3

18. AUTHORIZED BY:

[Signature]
REGULATORY AFFAIRS

3/1/89
DATE

NOTE: THIS FORMAT IS ISSUED IN LIEU OF US BLM FORM 3160-5


=====

(This space for Federal or State office use)

APPROVED BY _____
CONDITION OF APPROVAL, IF ANY:

TITLE _____

DATE _____

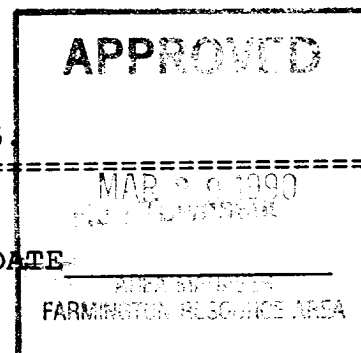

Well Name: 482 SAN JUAN 30-6 UNIT
 Sec. 31 T30N R06W
 BASIN FRUITLAND COAL

860'S 2525'W
 RIO ARRIBA NEW MEXICO
 Elevation 6811'GL

Formation tops: Surface- SAN JOSE
 Ojo Alamo- 2767
 Kirtland- 2945
 Fruitland- 3416
 Fruitland Coal Top- 3583
 Fruitland Coal Base- 3683
 Intermediate TD- 3563
 Total Depth- 3684
 Pictured Cliffs- 3709

Logging Program: Mud logs from intermediate to total depth.

Mud Program:	Interval	Type	Weight	Visc.	Fl. Loss
	0 - 200	Spud	8.4 - 8.9	40-50	no control
	200 - 3563	Non-dispersed	8.4 - 9.1	30-60	no control
	3563 - 3684	Formation Water	8.4		no control

Casing Program:	Hole Size	Depth Interval	Csg. Size	Weight	Grade
	12 1/4"	0 - 200	9 5/8"	32.3#	H-40
	8 3/4"	0 - 3563	7"	20.0#	K-55
	6 1/4"	3513 - 3684	5 1/2"	15.5#	K-55
Tubing Program:		0 - 3684	2 7/8"	6.5#	J-55

Float Equipment: 9 5/8" surface casing - saw tooth guide shoe.

7" intermediate casing - guide shoe and self-fill insert float valve.
 Three centralizers run every other joint above shoe. Run insert float
 one joint above the guide shoe.

5 1/2" production casing - float shoe on bottom and a pre-drilled liner
 run to the 7" casing with a minimum 50' overlap. Liner hanger is a
 double slip grip type.

Wellhead Equipment: 9 5/8" x 7" x 2 7/8" x 11" 3000 psi xmas tree assembly.

Cementing:

9 5/8" surface casing - cement with 106 sacks of class "B" cement with 1/4#
 flocele/sack and 3% calcium chloride (125 cu ft. of slurry, 100%
 excess to circulate to surface). WOC 12 hours. Test casing to 600
 psi for 30 minutes.

7" intermediate casing - lead with 63 sacks of 65/35 class "B" poz with 6%
 gel, 2% calcium chloride and 1/2 cu ft. Perlite/sack (10.3 gallons of
 water/sack) tail with 100 sacks of class "B" with 2% calcium chloride.
 239 cu ft. of slurry, 100% excess to cover the Ojo Alamo. Run
 temperature survey at 8 hours. WOC 12 hours. Test casing to 1500 psi
 for 30 minutes.

5 1/2" liner - do not cement.

BOP and Tests:

Surface to intermediate TD - 11" 2000 psi(minimum) double gate BOP stack (Reference Figure #1). Prior to drilling out surface casing, test rams to 600 psi for 30 minutes.

Intermediate TD to TD - 7 1/16" 2000 psi(minimum) double gate BOP stack (Reference Figure #2). Prior to drilling out intermediate casing, test rams to 1500 psi(minimum) for 30 minutes.

From surface to TD - choke manifold (Reference Figure #3).


Pipe rams will be actuated at least once each day and blind rams actuated once each trip to test proper functioning. A kelly cock valve and drill string safety valves to fit each drill string will be maintained and available on the rig floor.

Addition Information:

The Fruitland coal formation will be completed.
This gas is dedicated.
The W/2 of Section 31 is dedicated to this well.

TOP SET FRUITLAND COAL


FIGURE #1

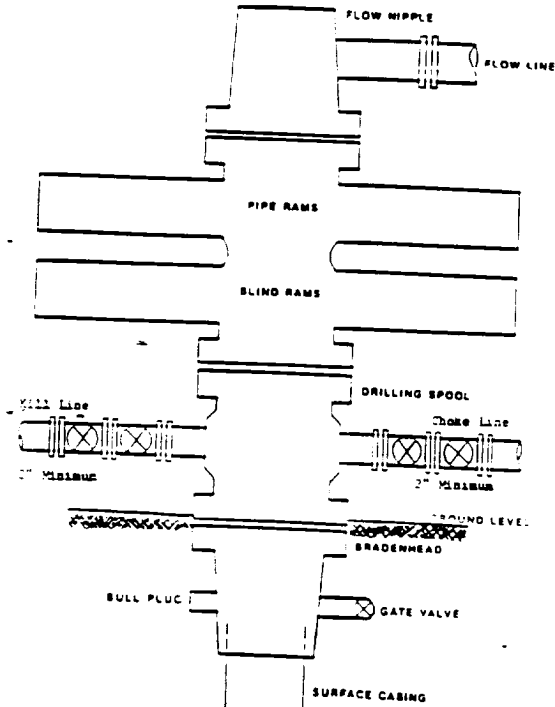

Minimum BOPE installation for a typical Fruitland Coal well from surface to intermediate TD. 11", 2000 psi working pressure double gate BOP equipped with blind and pipe rams.

TOP SET FRUITLAND COAL


FIGURE #2

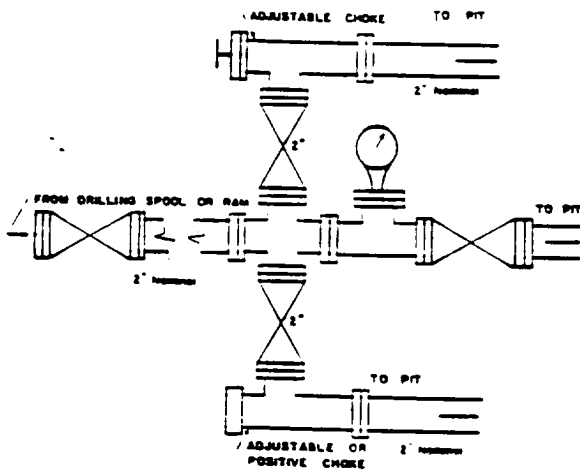

Minimum choke manifold configuration for a typical Fruitland Coal well from surface to TD. 2", 2000 psi working pressure equipment with two chokes.

TOP SET FRUITLAND COAL


FIGURE #2

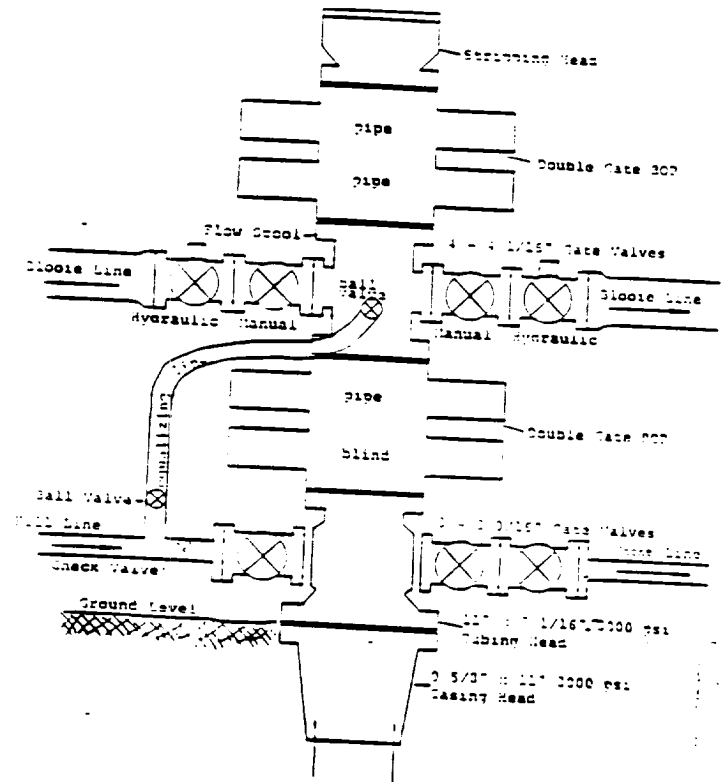

Minimum BOPE installation for a typical Fruitland Coal well from intermediate TD to TD. 6", 2000 psi working pressure double stack double gate BOP equipped with three pipe and one blind ram.

TOP SET FRUITLAND
COAL WELL BOPE.

UPDATED
9/8/89

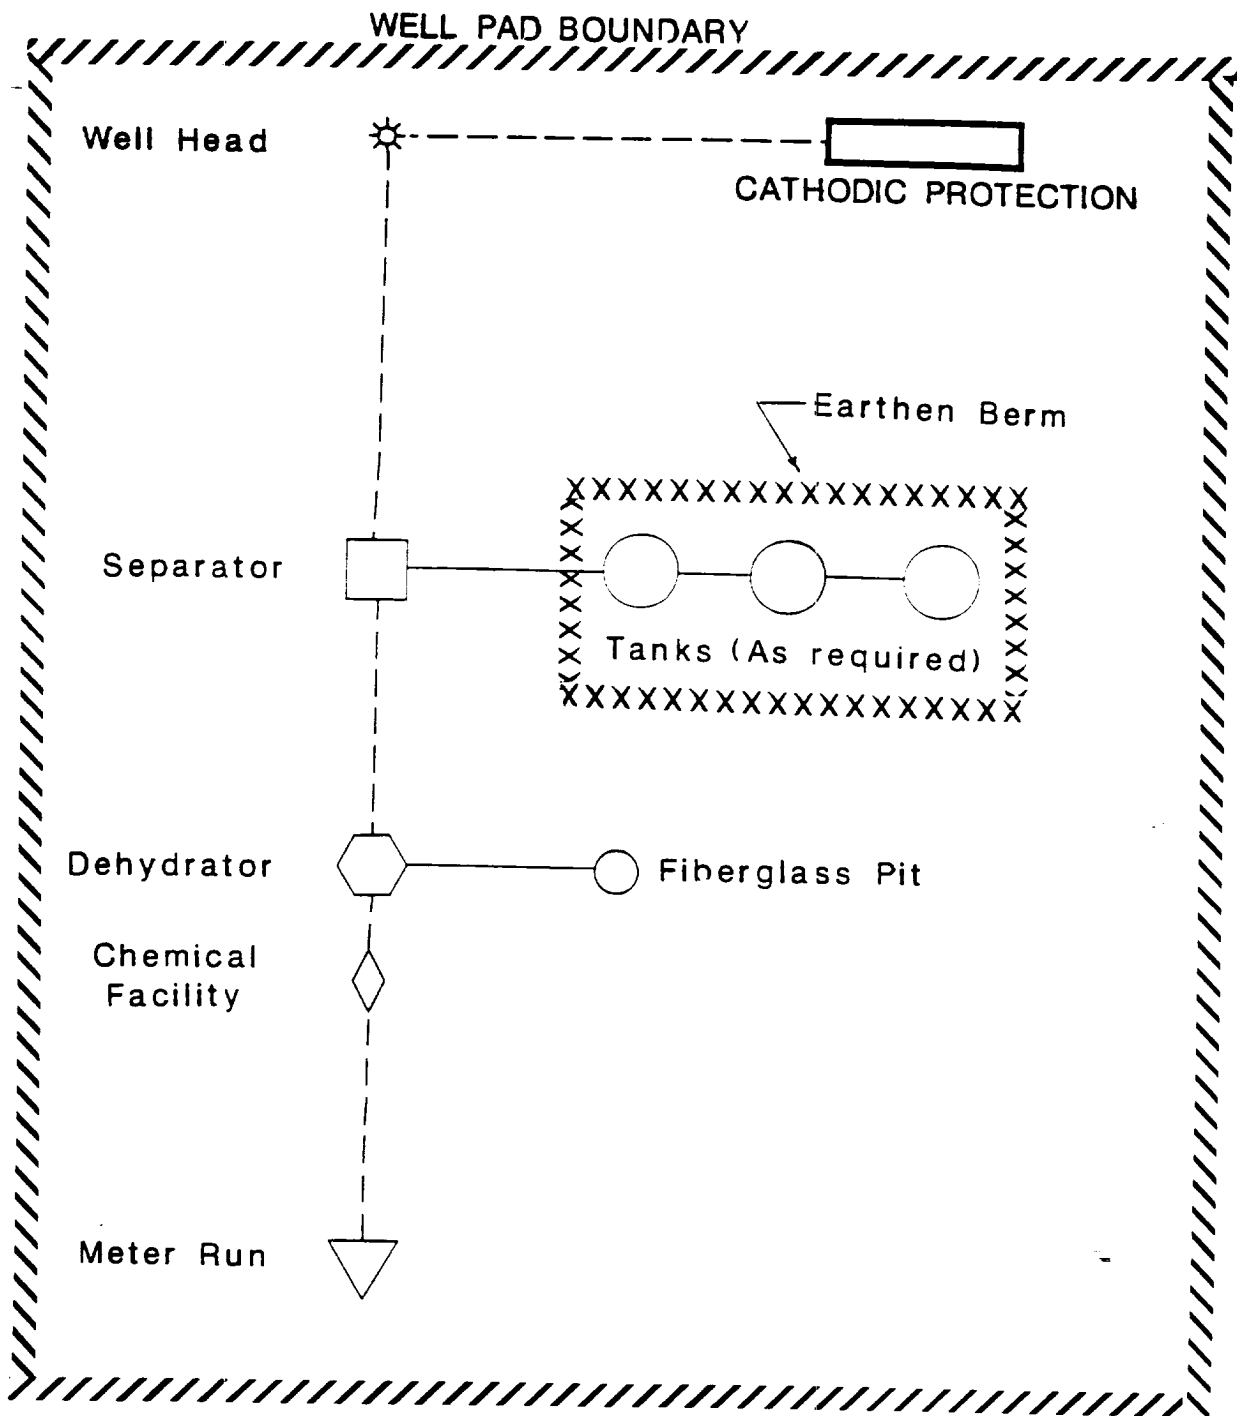

MERIDIAN OIL

ANTICIPATED
PRODUCTION FACILITIES
FOR A
FRUITLAND WELL

J. Falconi

4/28/89