

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE\*  
(Other instructions on re-  
verse side)Form approved.  
Budget Bureau No. 42-R1424.  
5. LEASE DESIGNATION AND SERIAL NO.

1-89-IND-56

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

Navajo

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Rattlesnake Govt.

9. WELL NO.

142

10. FIELD AND POOL, OR WILDCAT

Rattlesnake-Penn. BCD

11. SEC., T., R., M., OR BLK. AND  
SURVEY OR AREA

Sec. 12, T29N, R19W

12. COUNTY OR PARISH

San Juan

13. STATE

New Mexico

## SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.)1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

Continental Oil Company

3. ADDRESS OF OPERATOR

152 North Durbin, Casper, Wyoming 82601

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
See also space 17 below.)  
At surface

1980' FNL, 1980' FWL (Unit Letter F)

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

5389' DF

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON\*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING



ABANDONMENT\*

(NOTE: Report results of multiple completion on Well  
Completion or Recompletion Report and Log form.)17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any  
proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones perti-  
nent to this work.)\*

Well History: TD 6816'. 13 3/8" surface casing, 48#, H-40 set at 320' and 9 5/8" intermediate casing, 36#, J-55 set at 4650'. Production casing, 7", 23#, J-55 set at 6688'. Open hole 6688-6816'.

The well was plugged and abandoned on 1-12-72 as follows:

A 60 sack cement plug was set from 6600' to 6400' - WOC and pressure tested - held okay. A 35 sack cement plug was set from 5700' to 5575' and a 45 sack cement plug was set from 4400' to 4300'. Shot 9 5/8" casing at 606' and pulled. A 65 sack cement plug was set from 656' to 556' and a 26 sack cement plug was set from 30' to surface. Erected a regulation marker.

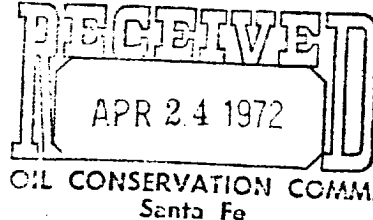

USGS(6) NMOCC(2) File(2)

18. I hereby certify that the foregoing is true and correct

SIGNED

*J. A. Usher*

TITLE Administrative Supervisor

DATE 4-6-72

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

TITLE \_\_\_\_\_

DATE \_\_\_\_\_

\*See Instructions on Reverse Side