
DEC 301557

Meter Number:89351
Location Name:Florance #71
Location:TN-29 RG-09
SC-24 UL-O
2 - Federal
NMOCD Zone:OUTSIDE
Hazard Ranking Score:00



RATIONALE FOR RISK-BASED CLOSURE OF PRODUCTION PITS LOCATED OUTSIDE OF THE VULNERABLE ZONE IN THE SAN JUAN BASIN

This production pit location was ranked according to the criteria in the New Mexico Oil Conservation Division's Unlined Surface Impoundment Closure Guidelines and received a ranking score of zero. The estimated depth to groundwater is greater than 100-feet beneath ground surface (bgs), the pit is not in a well head protection area, and there are no surface water bodies within 1,000 horizontal feet of the pit location.

The primary source, discharge to the pit has been removed. There has been no discharge to the pits for at least 4 years and the pits have been closed for at least one year.

Each pit was backfilled with clean soil and graded in a manner to divert precipitation away from the excavated area. Minimal infiltration of rainfall is expected. Any rainfall that does infiltrate the ground surface must migrate through clean backfill before reaching the residual hydrocarbons.

There is no source material at the ground surface, so direct contact of hydrocarbons with livestock and the populous is not likely.

In general, outside of the vulnerable area and alluvial valleys, bedrock material is generally encountered within 20 feet of the ground surface. Bedrock material in the San Juan Basin consists of interbedded sandstones, shales and clays. According to Freeze and Cherry, 1979, the hydraulic conductivity of the bedrock material are as follows:

Sandstone 10⁻⁹ to 10⁻¹³ cm/sec Shale 10⁻¹² to 10⁻¹⁶ cm/sec Clay 10⁻¹² to 10⁻¹⁵ cm/sec

Based on this information, the residual hydrocarbons should not migrate to groundwater.

Natural process (bioremediation) are degrading the residual hydrocarbon to carbon dioxide and water and will continue until the source is gone, therefore minimizing any impact to the environment.

Based on the above information, it is highly unlikely that any source material will impact groundwater or ever find an exposure pathway to affect human health and therefore El Paso Field Services Company (EPFS) requests closure of this pit location.

FIELD PIT SITE ASSESSMENT FORM



GENERAL	Meter: 89351 Location: Florance #71 Operator #: 0203 Operator Name: Amoco P/L District: Blanco Coordinates: Letter: D Section 22 Township: 29 Range: 09 Or Latitude Longitude Pit Type: Dehydrator Location Drip: Line Drip: Other: Site Assessment Date: 6-9-95 Area: 13 Run: 51					
SITE ASSESSMENT	NMOCD Zone: (From NMOCD (From NMOCD Maps) Inside (1) Fee (3) Outside (2) Indian Depth to Groundwater Less Than 50 Feet (20 points) Greater Than 100 Ft (0 points) Wellhead Protection Area: Is it less than 1000 ft from wells, springs, or other sources of fresh water extraction?, or; Is it less than 200 ft from a private domestic water source? Horizontal Distance to Surface Water Body Less Than 200 Ft (20 points) Horizontal Distance to Surface Water Body Less Than 200 Ft (10 points) (2) Greater Than 1000 Ft (0 points) (3) Name of Surface Water Body (Surface Water Body: Perennial Rivers, Major Wash, Streams, Creeks, Irrigation Canals, Ditches, Lakes, Ponds) Distance to Nearest Ephemeral Stream (1) < 100'(Navajo Pits Only) (2) > 100'					
	TOTAL HAZARD RANKING SCORE: POINTS					
REMAR	Remarks: RedLine + Topo both show outside VZ. Wilh Close Pit Push In					

FIELD PIT REMEDIATION/CLOSURE FORM

GENERAL	Meter: 89351 Location: FloRance #71 Coordinates: Letter: O Section 24 Township: 29 Range: 09 Or Latitude Longitude Date Started: 7-5-95 Run: 13 51
FIELD OBSERVATIONS	Sample Number(s): MK 419 Sample Depth: Feet Final PID Reading Feet Yes No Groundwater Encountered
CLOSURE	Remediation Method: Excavation
REMARKS	Remarks: Arrived Took Fence down Dug sample Hole 1st 10 Affenced to be clean 16st 2' Had strong HYDrocarbon odor soil Brown Signature of Specialist: Morgan Xillion



FIELD SERVICES LABORATORY ANALYTICAL REPORT

PIT CLOSURE PROJECT - Soil Samples Outside the GWV Zone

			TION			
	Eial	ld ID		1 ah ID		<u></u>
SAMPLE NUMBER:	wk 1		946947			
MTR CODE SITE NAME:	89351 7-5-95		94 Q 14 / N/A			
SAMPLE DATE TIME (Hrs):			1715			
SAMPLED BY:			/A			
DATE OF TPH EXT. ANAL.: 7-0		6-95		1-6-95		
ATE OF BTEX EXT. ANAL.:						
TYPE DESCRIPTION: V G		-	Brown	ine sad	tolay	
PARAMETER		RESULTS				
THE PANAMETER STEEL STEEL	RESULT	UNITS	DF	QUALIF Q	IERS M(g)	V(ml)
TPH (418.1)	3010	MG/KG			2,07	28
HEADSPACE PID	127	PPM				
PERCENT SOLIDS	91.3	%				
		TPH is by EPA Method	d 418.1			
ative:						

Test Method for Oil and Grease and Petroleum Hydrocarbons in Water and Soil

Perkin-Elmer Model 1600 FT-IR Analysis Report ******************

95/07/06 13:35


Sample identification 946947

Initial mass of sample, g 0.070

Volume of sample after extraction, ml 000.80

Petroleum hydrocarbons, ppm 009.582

Net absorbance of hydrocarbons (2930 cm-1) 0.387

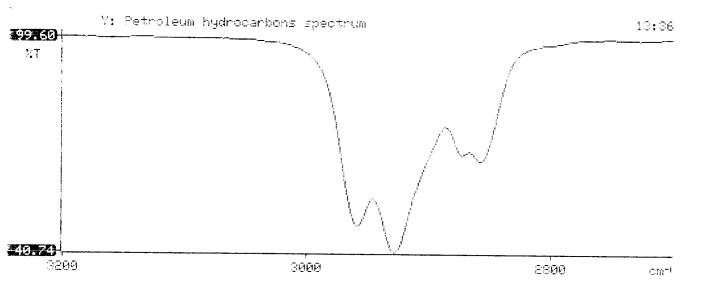

*