


ROSA UNIT #91B **BLANCO MV/BASIN DK**

Location: 1070' FSL, 295' FEL
 SE/4 SE/4 Section 35P, T32N, R6W
 Rio Arriba Co., NM

Elevation: 6325' GR

Spud Date 08-15-01
 Completed 10-21-01

<i>Tops</i>	<i>Depth</i>
Ojo Alamo	2356'
Kirtland	2484'
Fruitland	2932'
Pictured Cliffs	3146'
Cliff House	5358'
Point Lookout	5620'
Mancos	6155'
Dakota	7884'

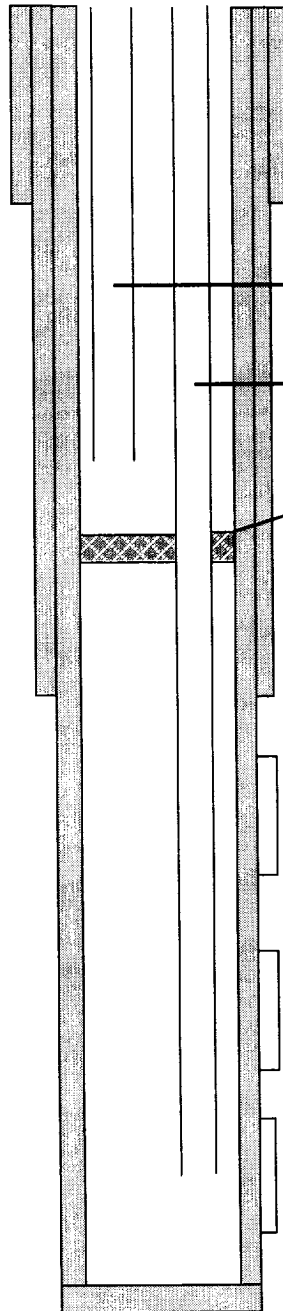

11 jts of 10 3/4", 40#, K-55 csg.
 Set @ 510'

Mesaverde Tubing: Ran 186 jts 2-1/16", IJ, 3.25#, tbg with mule shoe on bottom and SN 1 jt off bottom. Landed @ 5963'

Dakota Tubing: Ran 246 jts 2-1/16", IJ, 3.25#, tbg with mule shoe on bottom and SN 1 jt up. Landed @ 8001'.

Arrow model "B" packer @ 6148'

79 jts of 7-5/8", 26.4#, K-55, ST&C csg. Landed @ 3619.
 Float @ 3678'. Cement with 830 sx cmt

4776'

5623'

5658'

5926'

7886'

7992'

179 jts of 5-1/2", 17#, N-80 LT&C csg. Landed @ 8056'. 1st marker jt @ 7550', 2nd marker jt @ 5037'. Float collar @ 8033'. Cement w/ 300 sx cmt.

TD @ 8050'
 PBTD @ 8033'

CliffHouse/Menefee 4776' - 5623' (33, 0.38" holes)
 89,000# of 20/40 sand in 1886 BBI's slick water.

Point Lookout 5658' - 5926' (25, 0.38" holes)
 80,000# of 20/40 sand in 1893 BBI's slick water.

Dakota 7886' - 7992' (18, 0.38" holes)
 80,000# of 20/40 Acfrac SB Excel resin coated proppant carried in 60Q Spectre G foam in 568 BBI's slick water



K


ROSA UNIT #91B **BLANCO MV/BASIN DK**

Location: 1070' FSL, 295' FEL
 SE/4 SE/4 Section 35P, T32N, R6W
 Rio Arriba Co., NM

Elevation: 6325' GR

Spud Date 08-15-01
 Completed 10-21-01

<i>Tops</i>	<i>Depth</i>
Ojo Alamo	2356'
Kirtland	2484'
Fruitland	2932'
Pictured Cliffs	3146'
Cliff House	5358'
Point Lookout	5620'
Mancos	6155'
Dakota	7884'

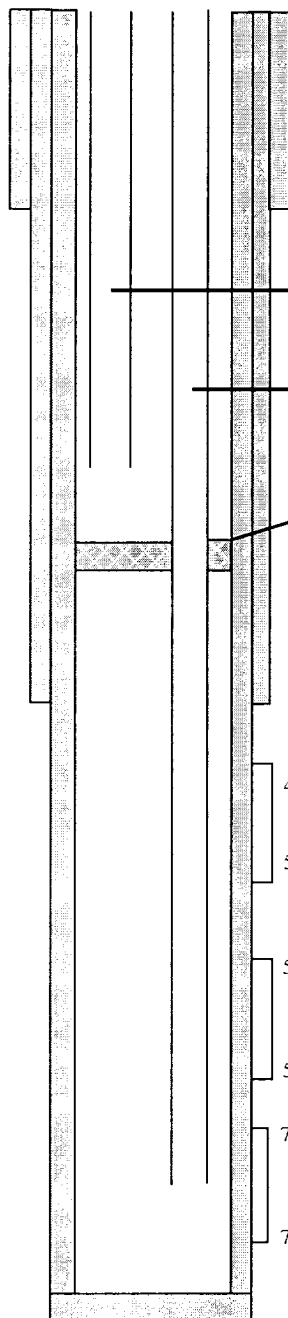

11 jts of 10 3/4", 40#, K-55 csg.
 Set @ 510'

Mesaverde Tubing: Ran 186 jts 2-1/16", IJ, 3.25#, tbg
 with mule shoe on bottom and SN 1 jt off bottom.
 Landed @ 5963'

Dakota Tubing: Ran 246 jts 2-1/16", IJ, 3.25#, tbg with
 mule shoe on bottom and SN 1 jt up. Landed @ 8001'.

Arrow model "B" packer @ 6148'

79 jts of 7-5/8", 26.4#, K-55, ST&C csg. Landed @ 3619.
 Float @ 3678'. Cement with 830 sx cmt

CliffHouse/Menefee 4776' - 5623' (33, 0.38" holes)
 89,000# of 20/40 sand in 1886 BBI's slick water.

Point Lookout 5658' - 5926' (25, 0.38" holes)
 80,000# of 20/40 sand in 1893 BBI's slick water.

Dakota 7886' - 7992' (18, 0.38" holes)
 80,000# of 20/40 Actrac SB Excel resin coated proppant
 carried in 60Q Spectre G foam in 568 BBI's slick water

179 jts of 5-1/2", 17#, N-80 LT&C csg.
 Landed @ 8056'. 1st marker jt @ 7550',
 2nd marker jt @ 8037'. Float collar @
 8033'. Cement w/ 300 sx cmt.

TD @ 8050'
 PBTD @ 8033'

