

UNITED STATES DEPARTMENT OF THE INTERIOR GEOLOGICAL SURVEY

SUBMIT IN DUPLICATE*

(See other instructions on reverse side)

Form approved. Budget Bureau No. 42-R352.6.

WELL COMPLETION OR RECOMPLETION REPORT AND LOG *

1a. TYPE OF WELL: OIL WELL [] GAS WELL [X] DRY [] Other []

b. TYPE OF COMPLETION: NEW WELL [X] WORK OVER [] DEEP-EN [] PLUG BACK [] DIFF. RESVR. [] Other []

2. NAME OF OPERATOR Rincon Operating Co.

3. ADDRESS OF OPERATOR 1860 Lincoln Street, Suite 808, Denver, CO 80295

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)* At surface 1739' FWL & 2247' FSL At top prod. interval reported below At total depth

14. PERMIT NO. DATE ISSUED 3/27/79

5. LEASE DESIGNATION AND SERIAL NO.

NM 0101125-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Ute Dome Federal

9. WELL NO.

#1

10. FIELD AND POOL, OR WILDCAT

Ute Dome Paradox

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA

Sec. 19, T32N, R13W

12. COUNTY OR PARISH San Juan 13. STATE New Mexico

15. DATE SPUNDED 4/3/79 16. DATE T.D. REACHED 5/6/79 17. DATE COMPL. (Ready to prod.) 10/23/79 18. ELEVATIONS (DF, REB, RT, GR, ETC.)* 6422' GR 19. ELEV. CASINGHEAD


20. TOTAL DEPTH, MD & TVD 9580' 21. PLUG BACK T.D., MD & TVD 8958' (top of cmt retainer) 22. IF MULTIPLE COMPL., HOW MANY* 23. INTERVALS DRILLED BY 24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)* 8047' - 9509' (See attached) 25. WAS DIRECTIONAL SURVEY MADE No

26. TYPE ELECTRIC AND OTHER LOGS RUN DIL, Density Neutron with GR Caliper 27. WAS WELL CORED No

Table with 5 columns: CASING SIZE, WEIGHT, LB./FT., DEPTH SET (MD), HOLE SIZE, CEMENTING RECORD, AMOUNT PULLED. Rows include 10 3/4" 40.5# 710' 15" 700 sxs None and 5 1/2" 17# 9580' 7 7/8" 600 sxs None.

Table with 8 columns: SIZE, TOP (MD), BOTTOM (MD), SACKS CEMENT*, SCREEN (MD), SIZE, DEPTH SET (MD), PACKER SET (MD). Rows include 2 3/8" 8002' 8002'.

31. PERFORATION RECORD (Interval, size and number) See attached 32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC. See attached

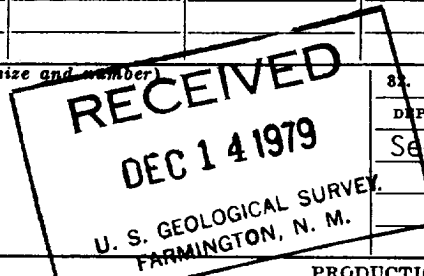

33.* PRODUCTION DATE FIRST PRODUCTION 10/23/79 PRODUCTION METHOD (Flowing, gas lift, pumping—size and type of pump) Flowing

Table with 8 columns: DATE OF TEST, HOURS TESTED, CHORE SIZE, PROD'N FOR TEST PERIOD, OIL—BBL., GAS—MCF., WATER—BBL., OIL GRAVITY-API (CORR.). Rows include 10/23/79 2 25/64 4 312.5 6 3.

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) Vented TEST WITNESSED BY Herman H. Fellhoelter, Jr.

35. LIST OF ATTACHMENTS

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records SIGNED Clarence H. Brown TITLE President

ACCEPTED FOR RECORD DATE 12/11/79

*(See Instructions and Spaces for Additional Data on Reverse Side)

DEC 18 '79

FARMINGTON DISTRICT BY

NM4000

INSTRUCTIONS

General: This form is designed for submitting a complete and correct well completion report and log on all types of lands and leases to either a Federal agency or a State agency, or both, pursuant to applicable Federal and/or State laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office. See instructions on items 22 and 24, and 33, below regarding separate reports for separate completions.

If not filed prior to the time this summary record is submitted, copies of all currently available logs (drillers, geologists, sample and core analysis, all types electric, etc.), formation and pressure tests, and directional surveys, should be attached hereto, to the extent required by applicable Federal and/or State laws and regulations. All attachments should be listed on this form, see item 35.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 18: Indicate which elevation is used as reference (where not otherwise shown) for depth measurements given in other spaces on this form and in any attachments. **Items 22 and 24:** If this well is completed for separate production from more than one interval zone (multiple completion), so state in item 22, and in item 24 show the producing interval, or intervals, top(s), bottom(s) and name(s) (if any) for only the interval reported in item 33. Submit a separate report (page) on this form, adequately identified, for each additional interval to be separately produced, showing the additional data pertinent to such interval.

Item 29: "Sacks Cement": Attached supplemental records for this well should show the details of any multiple stage cementing and the location of the cementing tool. **Item 33:** Submit a separate completion report on this form for each interval to be separately produced. (See instruction for items 22 and 24 above.)

FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	GEOLOGIC MARKERS		
				NAME	MEAS. DEPTH	
					TOP	
					TRUE VERT. DEPTH	
				Upper Hermosa	7394	
				Ismay	8502	
				Desert Creek	8690	
				Akah	8841	
				Barker Creek	9006	

Attachment to: 9-330

Rincon Operating Co.
Ute Dome Federal #1
Section 19, T32N, R13W
San Juan County, N.M.

31. Perforation Record:

Perforated as follows with 1 shot per foot:

1. 9380-86'; 9390-9404'; 9434-42'; 9447-58'; 9474-81';
9488-98'; 9504-09'; 9358-70'; 9350-54'; 9333-36'; (9507' Bottom)
9323-30'; 9250-9319'; 9230-40'; 9214-25'; 9194-9200';
9188-90'; 9164-84'; 9148-58; 9123-45'; 9107-9119'; 9509-9014 Barker Creek
9034-9103'; 9014-9029'.

Acidized above perforations with 30,000 gallons 28% HCL.

Squeezed above perforations with 600 sxs of 50-50 pozmix
with radioactive sand + 125 sxs of Class B.

2. Perforated as follows with 1 shot per foot:

8811-8813'; 8800-08'; 8700-8796'. (Desert Creek and Akah)

Acidized above zone with 20,000 gallons 28% HCL.

3. Perforated as follows with 1 shot per foot:

8601-8634'; 8517-8573'. Desert Creek

Acidized above perforations with 10,000 gallons 28% HC.

4. Perforated as follows with 1 shot per foot:

8441-8457'; 8416-36'; 8384-8402'; 8367-8374'; 8310-26'; 8047' Top
8240-8256'; 8140-8187'; 8096-8104'; 8047-8080'. Upper Hermosa

Acidized above perforations with 16,000 gallons 28% HC.

ACCEPTED FOR RECORD

DEC 18 '79

FARMINGTON DISTRICT

BY WJS