Form 3160-5 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB NO. 1004-0135 Expires: July 31, 2010

Expires: July
Lease Serial No.
NMNM14492

SUNDR	Y NOTICES AND REPO	5. Lease Senal No. NMNM14492		
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.				e or Tribe Name
SUBMIT IN T	RIPLICATE - Other instru	ctions on reverse side.	7. If Unit or CA/Ag	reement, Name and/or No.
1. Type of Well	8. Well Name and N			
☑ Oil Well ☐ Gas Well ☐			MESA 8105 JV	-P 011
 Name of Operator BTA OIL PRODUCERS, LL 		KAYLA D MCCONNELL ell@btaoil.com	9. API Well No. 30-025-42844	
3a. Address 104 SOUTH PECOS MIDLAND, TX 79701		3b. Phone No. (include area code Ph: 432-682-3753 Ext: 100 HOBBS O	JENNINGS;Ü	or Exploratory BONE SPRING SH
4. Location of Well (Footage, Sec	., T., R., M., or Survey Description		11. County or Paris	h, and State
Sec 11 T26S R32E 330FN	_ 2198FEL	DEC 0 2	LEA COUNTY	COUNTY, NM
12. CHECK AF	PROPRIATE BOX(ES) T	O INDICATE NATURE OF	NOTICE, REPORT, OR OTH	ER DATA
TYPE OF SUBMISSION		ТҮРЕ С	OF ACTION	
S Nation of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
■ Notice of Intent	☐ Alter Casing	☐ Fracture Treat	☐ Reclamation	■ Well Integrity
☐ Subsequent Report	☐ Casing Repair	■ New Construction	☐ Recomplete	Other
☐ Final Abandonment Notice	☐ Change Plans	□ Plug and Abandon	□ Temporarily Abandon	Change to Original A PD
	☐ Convert to Injection	☐ Plug Back	■ Water Disposal	
If the proposal is to deepen direct Attach the Bond under which the following completion of the invol testing has been completed. Final determined that the site is ready for	ionally or recomplete horizontally work will be performed or provid ved operations. If the operation re Abandonment Notices shall be for final inspection.) the use of a co-flex choke	, give subsurface locations and mease the Bond No. on file with BLM/BI esults in a multiple completion or rec	ng date of any proposed work and appured and true vertical depths of all per A. Required subsequent reports shall completion in a new interval, a Form 3 ding reclamation, have been complete lanifold. See the	tinent markers and zones. be filed within 30 days 160-4 shall be filed once
			TOD	
		CEE ATTA	CHED FOR ONS OF APPROVA	T
		SEL MITI	ONS OF APPROVA	AL -
		CONDITI	0145 02	
14. I hereby certify that the foregoin	Electronic Submission : For BTA O	#324348 verified by the BLM W L PRODUCERS, LLC, sent to t r processing by KENNETH REI	he Hobbs	
Name (Printed/Typed) KAYLA	D MCCONNELL		LATORY ANALYST	
Signature (Electron	ic Submission)	Date 11/23/	2015	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1
The Carlotte	THIS SPACE F	OR FEDERAL OR STATE	OFFICE USE	


Office

Approved By Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department of agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

RIS 133 COLTER STATE RUBBER VICUAL INSPECTION PRYDROSTATIC TEST REPORT RETEST

SHOP ORDER NO.: 22919	SIZE:	3 1/2"	LD
SERIAL NO.: 25556 A	LENG	TH40 FE	IN.
CONNECTIONS:		PSIAPIFLANGES	
AR	UAL INSPECTION		
PASS	1-	AIL	
	SCOPE INSPECTIO	М	
YES		NO	
1	ACOUM HEST		
PASS_X	F	AIL	
нуп	ROSTATIC TEST		
5 MIN. (i)	10,000	PSI	
2 MIN. @ 0 PSI	SKI KOME I SKI IMA	OAL.	
15 MIN. @	12,500	PSI	
WITNESSED BY:	poi for .		
DATE January 20	0, 2011		
FORM OA-18 REV-3 1013/09 Choke He	ose		

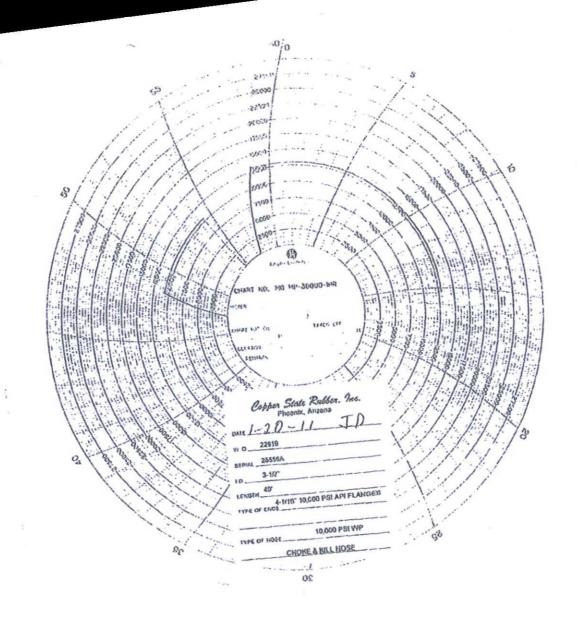



14141 S. Wayside Drive Houston, Texas 77048

Phone 713-644-1491 Fax 713-644-9830 www.copperstateruhber.com sales@copperstateruhber.com

August 28, 2009

NOMAC DRILLING 3400 S. RADIO ROAD EL RENO, OK. 73036

Subject:

Purchase Order No.: 201900

Date: August 27, 2009

Specialtics Company File No.: CSR-20275 / SPECO-60921

Equipment:

COPPER STATE RUBBER C/K HOSE, STAINLESS STEEL

ARMORED, FIRE RESISTANT, 10,000 PSI WP, 15,000 PSI TEST, API SPEC. 7 K, COMPLETE WITH 4-1/16" 10,000 PSI API FLANGE WITH STAINLESS STEEL INLAID BX-155 RING GROOVE BACH

END, H2S SUITED. 3-1/2"ID X 40 FF. S/N- 25556

CERTIFICATE OF COMPLIANCE / ORIGIN

This is to certify the above referenced equipment meets or exceeds the following requirements and were manufactured from same material specification and manufacturing methods as prototype assemblies for referenced specifications in Phoenix Arizona, U.S.A.

- I. COMPLETE HOSE ASSEMBLY
 - API Certificate of Accreditation for Spec: Q1 (Quality Programs) and Spec. 7K
 - 1. Copper State Rubber, Inc. Certificate No.: 7K-0014
 - B. CSR Specification No.: 090-1915
- II. PHYSICAL/CHEMICAL PROPERTIES OF METAL COMPONENTS
 - A. API Spec. 6A, latest edition
 - B. API Spec. 16A, latest edition

Marine, Industrial, and Oillield Hose Made in the U.S.A.

WELDMENTS / NDE REQUIREMENTS 111.

- Section IX. ASME Boiler & Pressure Code, 1986 Ed., 1987 Add. CSR / Specialties Company WPS / PQR Nos.: 911171-1, and 911171-2, Rev. 05 dated May 2005 B.

Page 2

- 111. WELDMENTS / NDE REQUIREMENTS (continued)
 - C. D. API Spec. 6A, latest edition API Spec. 16A. latest edition

Sincerely, Joe Leeper

Technical Manager



Cordificate of Authority to use the Official APS Wonogram License Number: 7K-0014 original

The American Petroleum Institute hereby grants to

COPPER STATE RUBBER, INC. 750 S. 59th Avenue Phoenix, Arizona

the right to use the Official API Monogram in manufactured products under the conditions of the American Petroleum Institute entitled API Spec Q1 and API Spec 7K and in accordance with the provisions of the Ucense Agreement.

In all cases where the Official API Monogram is applied, the API Monogram should be used to expection with this certificate number: 7K-0014

The American Petroleum Institute reserves this right to revoke this anchorization to use the the Appl Monagean for any reason satisfactory to the Board of Charcters of the American development in white:

The scope of this license includes the following products: High Pressure Mart and the Lent Hoses - FSL 0; High Pressure Mud and Cement Hoses - FSL 2

QMS Exclusions: No Exclusions Identified as Applicable

Effective Date: JUNE 18, 2011 Expiration Date: JUNE 18, 2014

To verify the authenticity of this license, go to www.apl.org/compositelist.

America: 'n ar num Institute

Gold Solling

Dates r - ry 3 Net

ABS Quality Evaluations Certificate Of Conformance

Tesis forestive aftic Contivillarseprood Systemed

Copper State Rubber, Inc. 750 South 69th Avenue

Phoenix, AZ 65043 U.S.A.

has been excessed by ABS Quality Evaluations, Inc. and found to be in conformance with the requirements set forth by 190 9001:2008

The Dutilly Altrogeneral Restara is accleanly to

DESIGN AND PARTIES OF DEPARTMENT, OR THE OD, PARTIES, AND ENDOSORIAL HOSES

Certificate flor

Exemation Date: issopidate:

18 Sentember 2012 31 August 2015 18 Sentember 2012

Theginesera Alex Weisselberg, President

Vitaria Maria terbi - Jeak-proto dantite e rapas dagami fo Hytericanae il notipat proporte e note da AMD detakan i de e disebuida e atalonista e atalonista de atalonista de la seguino proto de AMO del politico esta HAMD de la problem biologica de la seguino de la seguino de la seguino del del la seguino de la totales at want a material f

PECOS DISTRICT CONDITIONS OF APPROVAL

Mesa 8105 JV-P 6H API: 30-025-42844 BTA OIL PRODUCERS, LLC Section 11, T. 26 S., R 32 E. Lea County

Original COA still applies except for the addition of the Flex Line Variance conditions. See the following:

Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor. If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).

KGR 11232015