

Submit a Copy To Appropriate District

Office

District I – (575) 393-6161

1625 N. French Dr., Hobbs, NM 88240

District II – (575) 748-1283

811 S. First St., Artesia, NM 88210

District III – (505) 334-6178

1000 Rio Brazos Rd., Aztec, NM 87410

District IV – (505) 476-3460

1220 S. St. Francis Dr., Santa Fe, NM

87505

State of New Mexico  
Energy, Minerals and Natural ResourcesOIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505Form C-103  
Revised July 18, 2013

WELL API NO. 30-045-27749
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name NORTH BISTI COAL 32M COM
8. Well Number #002
9. OGRID Number 371838
10. Pool name or Wildcat BASIN FRUITLAND COAL

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b> (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other <input type="checkbox"/>	
2. Name of Operator DJR Operating, LLC	
3. Address of Operator 1 Road 3263, Aztec, NM 87410	
4. Well Location Unit Letter <u>M</u> : <u>790</u> feet from the <u>SOUTH</u> line and <u>790</u> feet from the <u>WEST</u> line Section <u>32</u> Township <u>26N</u> Range <u>12W</u> NMPM <u>SAN JUAN</u> County	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 6140 GL	

## 12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

<b>NOTICE OF INTENTION TO:</b> PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPL <input type="checkbox"/> DOWNHOLE COMMINGLE <input type="checkbox"/> CLOSED-LOOP SYSTEM <input type="checkbox"/> OTHER: <input type="checkbox"/>		<b>SUBSEQUENT REPORT OF:</b> REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> P AND A <input checked="" type="checkbox"/> CASING/CEMENT JOB <input type="checkbox"/> OTHER: <input type="checkbox"/>	
---	--	--	--

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

The subject well was Plugged & Abandoned on July 21, 2020 per the attached End of Well Report, Wellbore Diagram, and Marker.

Spud Date: 09/19/1990

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Shaw-Marie Ford TITLE Regulatory Specialist DATE 08/10/2020Type or print name Shaw-Marie Ford E-mail address: sford@djrlc.com PHONE: 505-632-3476**For State Use Only**APPROVED BY: Brandon Randall TITLE District III Supervisor DATE 10/19/2020

Conditions of Approval (if any):

**Plug and Abandonment End of Well Report**  
**for**  
**DJR Operating, LLC**  
**North Bisti Coal 32M Com 2**  
**API # 30-045-27749**  
**SW/SW, Unit M, Sec. 32, T26N, R12W**  
**San Juan County, NM**

7-16-2020: NMOCD notified planned P&A operations.

7-20 & 21-2020:

1. MIRU A Plus Rig 9 and equipment.
2. SITP = 0 psi, SICP = 15 psi, BH = 0 psi. Pull rods and pump.
3. Pull 2 3/8" production string, LD.
4. ND WH, NU BOP.
5. Pick up bit, scraper and 2 3/8" workstring. TIH to 1060', TOOH. TIH with 4 1/2" cement retainer, set retainer at 1060'.
6. Hook up to BH, load with 1/4 bbl water.
7. Roll the hole and pressure test casing to 650 psi, good test. Sting into retainer, mix and pump 10 sx class G cement through retainer into Fruitland perms. TOOH.
8. TIH with open-ended workstring to 1060'. Mix and pump 80 sx class G cement from 1060' to 100'. TOOH.
9. ND BOP, cut off WH. Measure TOCs. 4 1/2" casing at 100'. The 4 1/2" x 7" annulus at 61'. Install P&A marker.
10. RIH with 1" poly pipe and top off the 4 1/2" and the 4 1/2" x 7" annulus with a total of 30 sx class G cement. No fall back.

**No NMOCD representative on site.**

**All cement used was class G, mixed at 15.8 ppg, yield of 1.15 cu ft/sx.**

**Attached is a photo of the P&A marker.**

**GPS coordinates: Lat, 36.439628, Long -108.141153**

**DJR Operating, LLC**  
**As Plugged Wellbore Diagram**

**North Bisti Coal 32M Com 2**

API # 30-045-27749

SW/SW, Unit M, Sec 32, T26N, R12W  
 San Juan County, NM

GL 6140'

KB N/A

Spud Date 9/19/1990

**SURF CSG**

Hole size 8.75"  
 Csg Size: 7"  
 Wt: 20#  
 Grade: J-55  
 ID: 6.456"  
 Depth 134'  
 casing cap ft<sup>3</sup>/ft: 0.2273  
 TOC: Circ cmt  
 to surface

**FORMATION TOPS**


Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	N/A
Fruitland	972'
Pictured Cliffs	1141'

**PROD CSG**

Hole size 6.25"  
 Csg Size: 4.5"  
 Wt: 9.5#  
 Grade: J-55  
 ID: 4.09"  
 Depth 1294'  
 casing cap ft<sup>3</sup>/ft: 0.0912  
 7x4.5 capacity ft<sup>3</sup>/ft 0.1169  
 TOC: Circ cmt  
 to surface

Cement Ret. 1060'  
 Fruitland Coal perms  
 1098-1118'


PBTD 1257'  
 TD 1300'

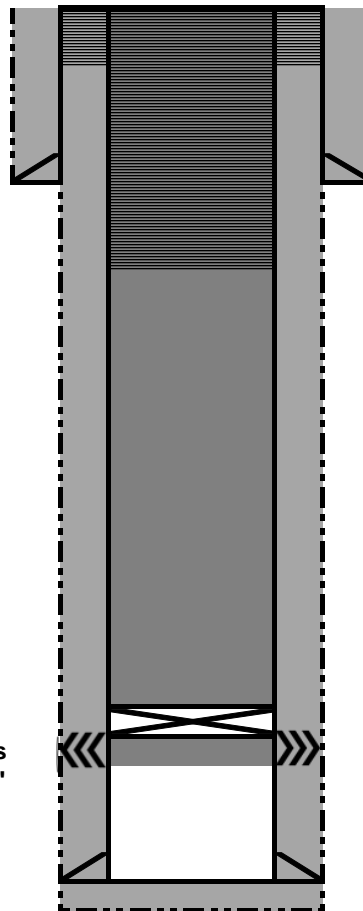

**Top off plug:** 30 sx class G cement to top off 4 1/2" casing and 4 1/2" x 7" annulus with 1" poly pipe.

**Plug 2:** 1060' to 100'. 80 sx class G cement. Tagged plug at 100'.

**Plug 1:** Mix and pump 10 sx class G cement through CR into Fruitland perms.

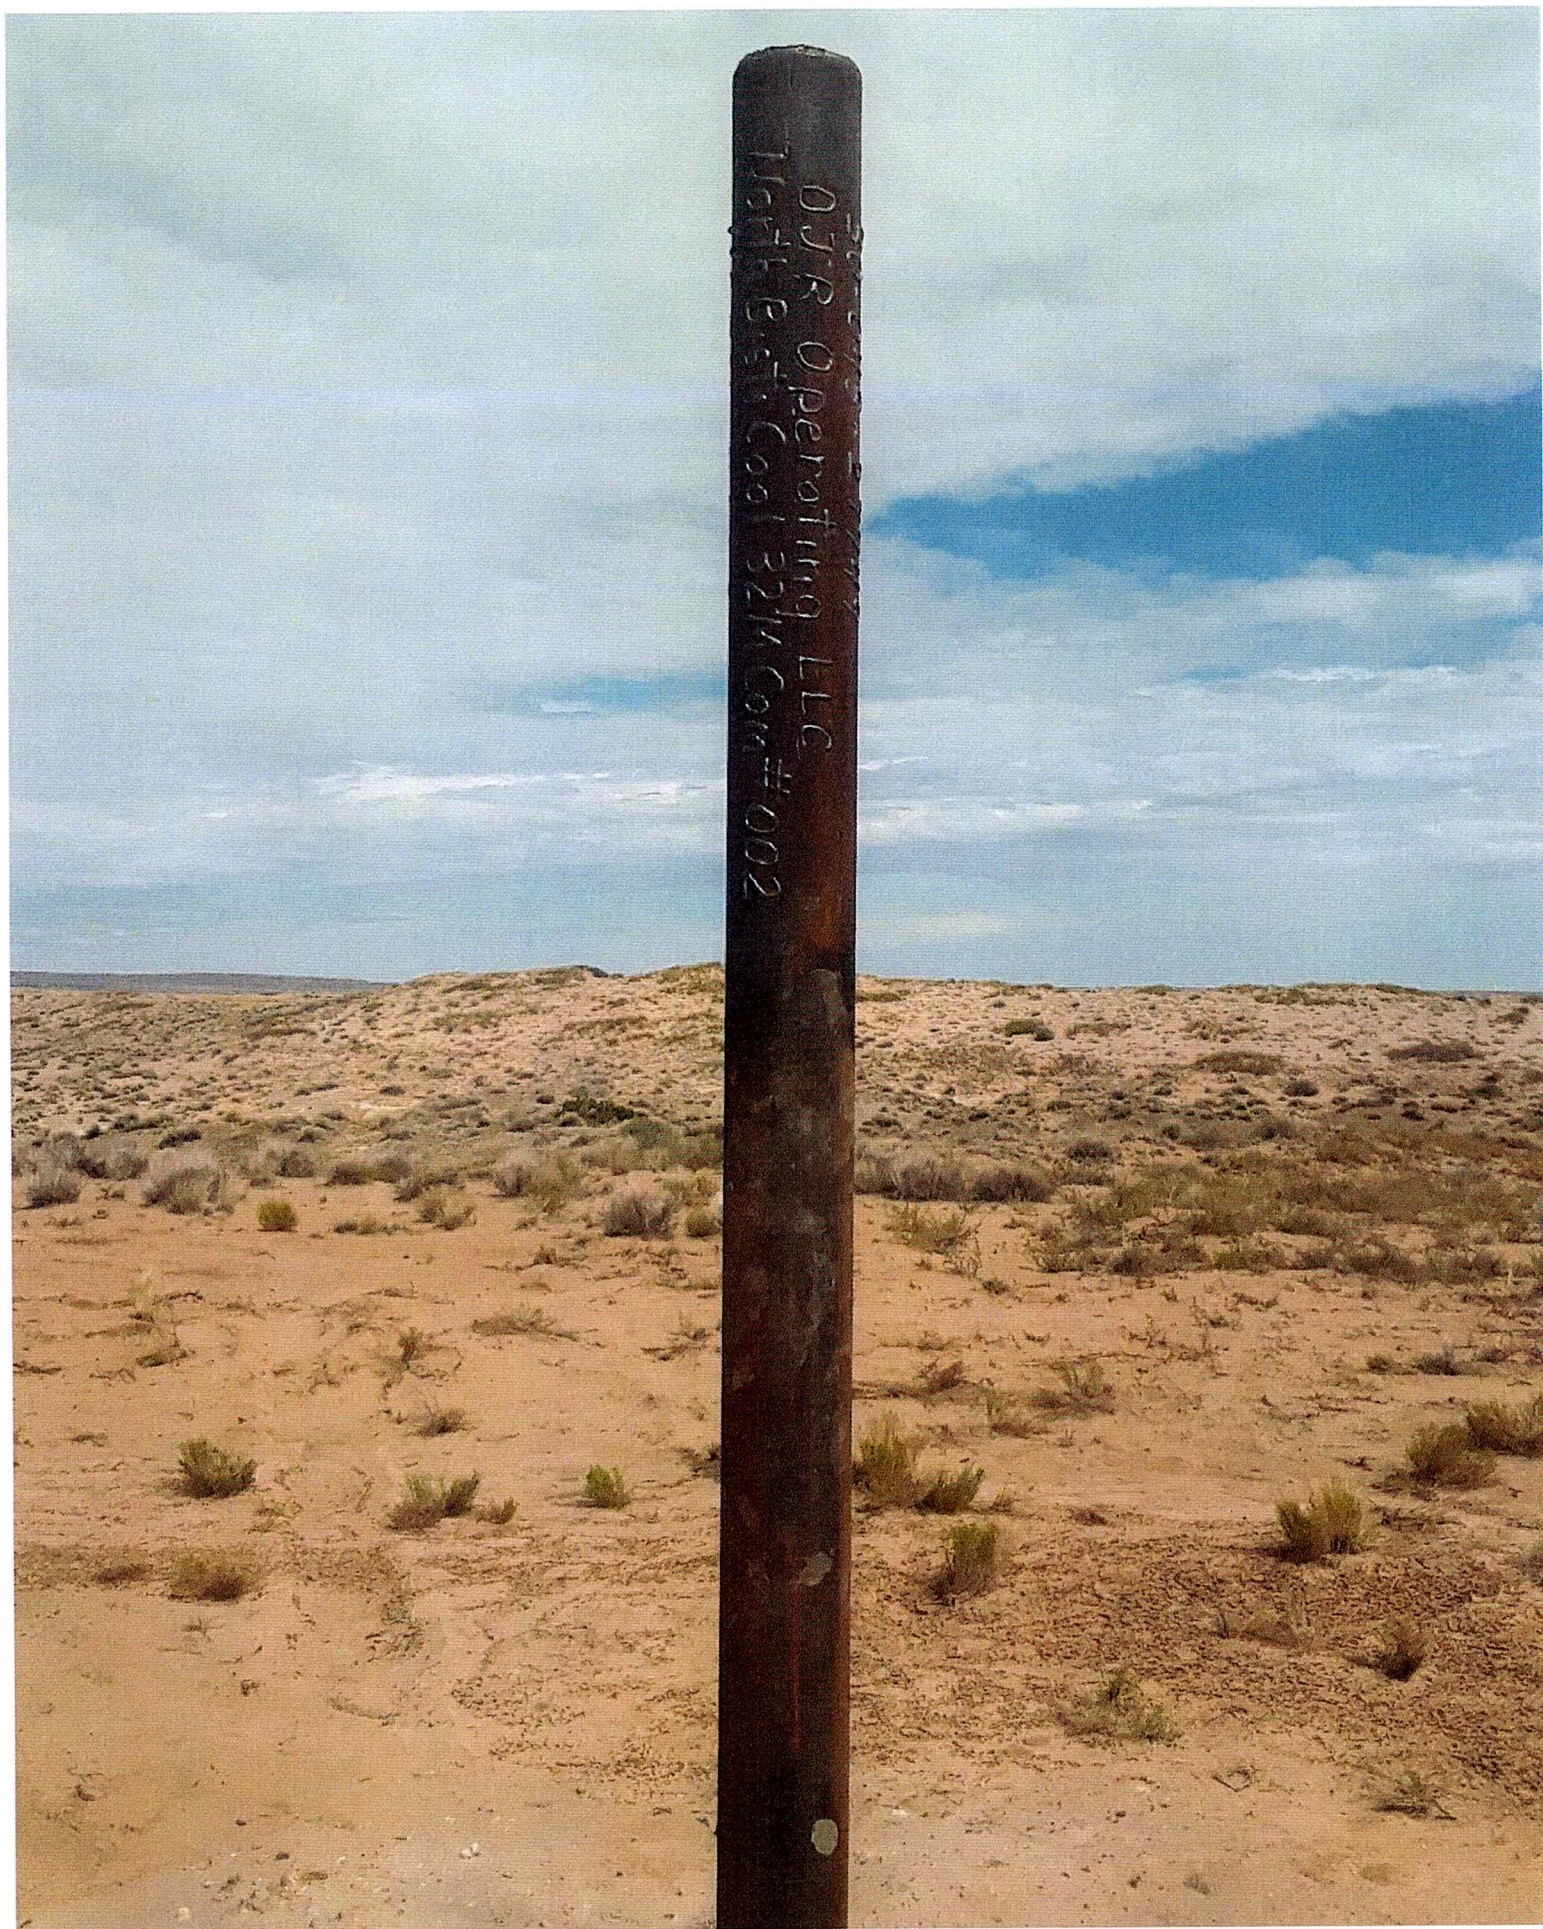

**District I**

1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**

811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**

1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**

1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS

Action 21997

**CONDITIONS OF APPROVAL**

Operator:	OGRID:	Action Number:	Action Type:
DJR OPERATING, LLC 1 Road 3263 Aztec, NM87410	371838	21997	C-103P

OCD Reviewer	Condition
ahvermersch	Approved for plugging of wellbore only. Liability under bond is retained pending Receipt of C-103 (Subsequent Report of Well Plugging) which may be found @ OCD web page under forms <a href="http://www.emnrd.state.us/ocd">www.emnrd.state.us/ocd</a>