



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Sundry Print Report

07/28/2021

Well Name: GREENWOOD PREGB UNIT	Well Location: T18S / R31E / SEC 27 / NWSE /	County or Parish/State: EDDY / NM
Well Number: 16	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMLC029392B	Unit or CA Name: GREENWOOD	Unit or CA Number: NMNM70958D
US Well Number: 300153251500X1	Well Status: Abandoned	Operator: EGL RESOURCES INCORPORATED

Accepted for record – NMOCD gc 8/2/2021

Subsequent Report

Type of Submission: Subsequent Report

Type of Action: Plug and Abandonment

Date Sundry Submitted: 07/21/2021

Time Sundry Submitted: 01:53

Date Operation Actually Began: 06/15/2021

Actual Procedure: 6/15/21 MIRU 6/16/21 Release pump, lay down rods, NU BOP. 6/17/21 Pull tubing. Set CIBP on wireline at 8048'. TIH w/ tubing, tag CIBP at 8048'. 6/18/21: Circulate well with 195 bbl 9# mud (2 sx salt gel per 100 bbl). Plug #1: spot 200 sx H 8048 - 7772'. Spot plug #2: 20 sx C 6166 - 5913'. Perf 4350', unable to inject at 1500 psi. 6/21/21 Spot plug #3: 45 sx C at 4400'. WOC, tagged top at 4120', too low. Spot 25 sx C at 4120' - 3870'. 6/22/21 Perf 2543', unable to inject at 1500 psi. Spot plug #4: 30 sx C at 2809'. WOC, tag top at 2470', too low. Spot 25 sx C at 2470'. Perf 719', circulate 1 bpm at 300 psi. Plug #5: squeeze 50 sx C 719', displace and shut-in w/ 300 psi on tubing, SION. 6/23/21: Tag plug #5 at 550'. Perf at 60', establish circulation at 150 psi. Plug #6: squeeze 40 sx C. Dig out cellar, cut off casing 3' below GL and remove (all 3 strings full of cement). 7/6/21: Install dry hole marker Site remediation is underway.

SR Attachments

Actual Procedure

[Greenwood_Pre_Grayburg__20210713130127](#)


WELL DATA SHEET**FIELD:** Shugart Bone Spring **WELL NAME:** Greenwood Pre-Grayburg Unit #16 **FORMATION:** Bone Spring**LOCATION:** 1980 FSL & 1980 FWL **SEC:** 27 **TWP:** 18S **RGE:** 31E **COUNTY:** EDDY **STATE:** NM**API NO:** 30-015-32515 **CURRENT STATUS:** Shut-in

Formation Tops	
Salt/Anhy	654
Yates	2493
Queen	3321
Bone Spring	6274

13 3/8", 48 lb/ft csg
Set @ 669'
500 sks cmt circ to
surface. 17.5" hole.

8 5/8", 32 lb/ft csg
Set @ 4115'
1515 sks cmt circ to
surface. 12.25"
hole.

5 1/2", 17 lb/ft, N-80 csg
Set @ 9971'
1190 sks cmt
TOC @ 5000' est
7 7/8" hole.

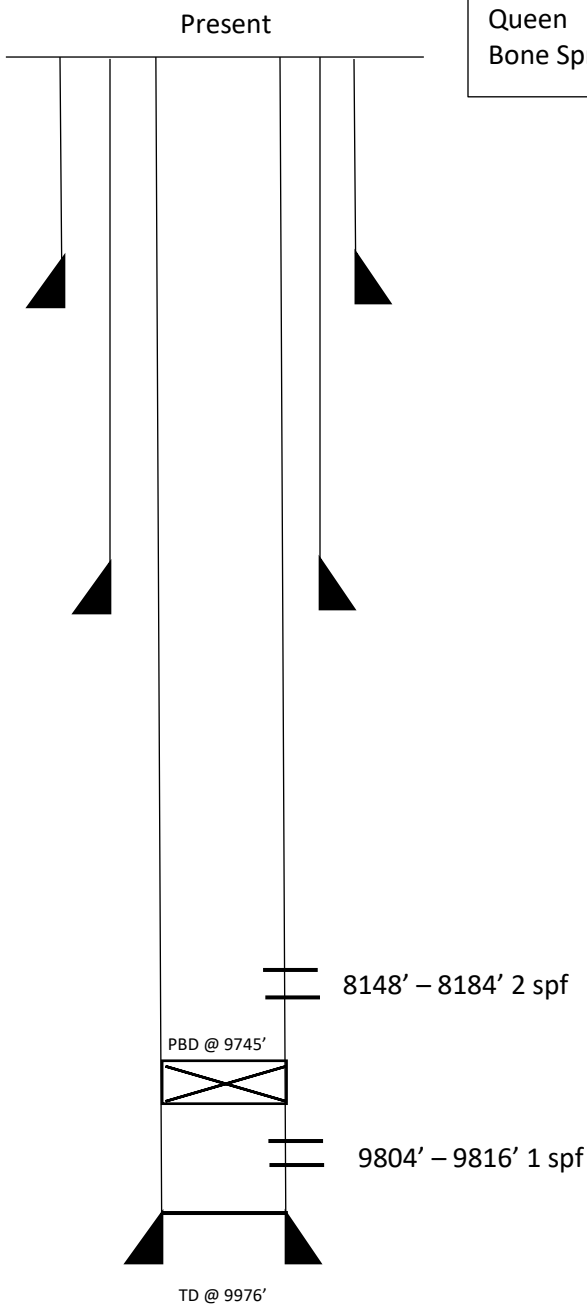


WELL DATA SHEET**FIELD:** Shugart Bone Spring **WELL NAME:** Greenwood Pre-Grayburg Unit #16 **FORMATION:** Bone Spring**LOCATION:** 1980 FSL & 1980 FWL **SEC:** 27 **TWP:** 18S **RGE:** 31E **COUNTY:** EDDY **STATE:** NM**API NO:** 30-015-32515 **CURRENT STATUS:** Shut-in

Formation Tops	
Salt/Anhy	654
Yates	2493
Queen	3321
Bone Spring	6274

13 3/8", 48 lb/ft csg
Set @ 669'
500 sks cmt circ to
surface. 17.5" hole.

8 5/8", 32 lb/ft csg
Set @ 4115'
1515 sks cmt circ to
surface. 12.25"
hole.

5 1/2", 17 lb/ft, N-80 csg
Set @ 9971'
1190 sks cmt
TOC @ 5000' est
7 7/8" hole.

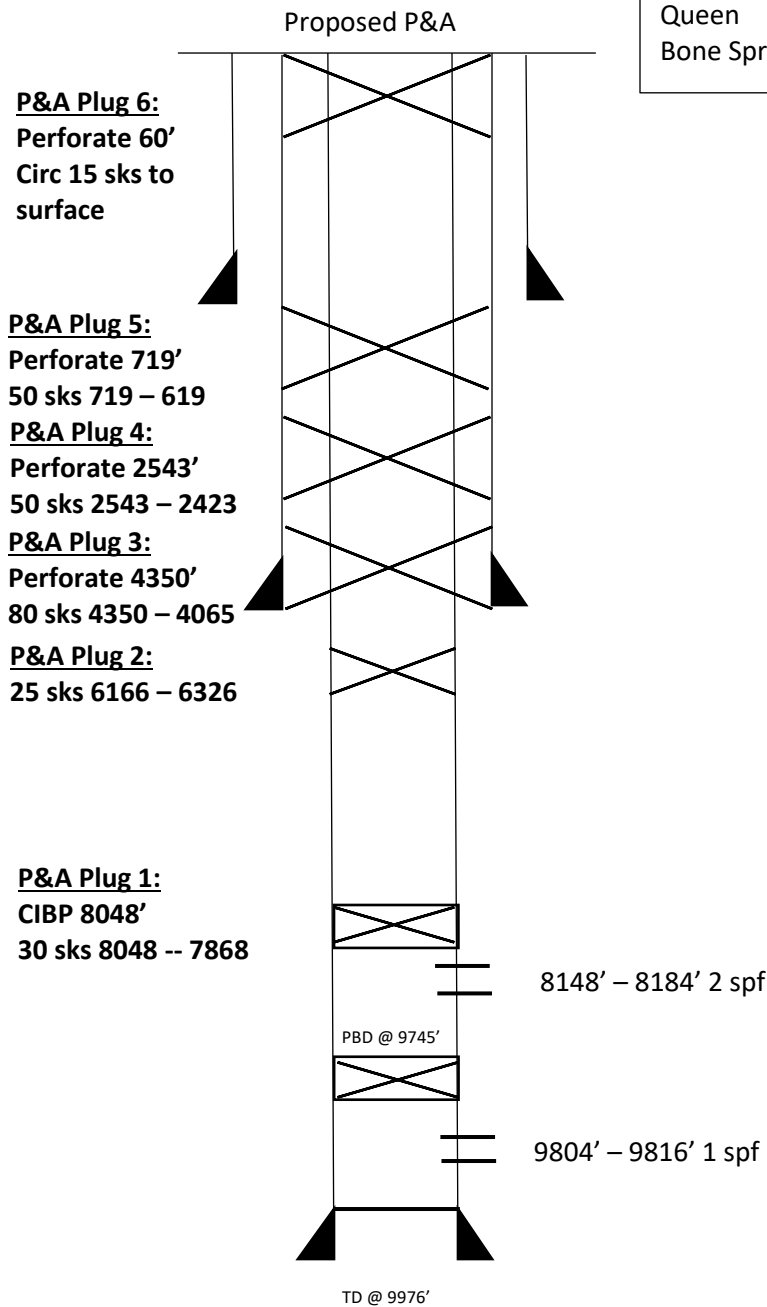

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 38785

CONDITIONS

Operator: E G L RESOURCES INC P.O. Box 10886 Midland, TX 79702	OGRID: 173413
	Action Number: 38785
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	8/2/2021