

Office  
District I - (575) 393-6161  
1625 N. French Dr., Hobbs, NM 88240  
District II - (575) 748-1283  
811 S. First St., Artesia, NM 88210  
District III - (505) 334-6178  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV - (505) 476-3460  
1220 S. St. Francis Dr., Santa Fe, NM  
87505

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO. <b>30-025-41500</b>
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. <b>VB-2157</b>
7. Lease Name or Unit Agreement Name <b>State BD 36</b>
8. Well Number #3
9. OGRID Number <b>013837</b>
10. Pool name or Wildcat <b>Blinebry(06660)&amp;Brunson;Drkd-Abo S (7900)</b>

**SUNDRY NOTICES AND REPORTS ON WELLS**  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well  Gas Well  Other

2. Name of Operator  
**Mack Energy Corporation**

3. Address of Operator  
**P.O. Box 960 Artesia, NM 88210**

4. Well Location  
Unit Letter **J** : **2250** feet from the **S** line and **1590** feet from the **E** line  
Section **36** Township **22S** Range **37E** NMPM County **Lea**

11. Elevation (Show whether DR, RKB, RT, GR, etc.)  
**3303' GR**

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

**NOTICE OF INTENTION TO:**

- PERFORM REMEDIAL WORK
- TEMPORARILY ABANDON
- PULL OR ALTER CASING
- DOWNHOLE COMMINGLE
- CLOSED-LOOP SYSTEM
- OTHER:
- PLUG AND ABANDON**
- CHANGE PLANS
- MULTIPLE COMPL

**SUBSEQUENT REPORT OF:**

- REMEDIAL WORK
- COMMENCE DRILLING OPNS.
- CASING/CEMENT JOB
- OTHER:
- ALTERING CASING
- P AND A

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Set 5 1/2" CIBP @ 6258'. Spot 25 sx cmt @ 6258-6058'.
2. Set 5 1/2" CIBP @ 5400'. Circ hole w/ MLF. Pressure test csg. Spot 25 sx cmt @ 5400-5200'. WOC & Tag. Spot 25 sx cmt 3900
3. Spot 25 sx cmt @ 2470-2270'. WOC & Tag (B/Salt) Spot 25 sx cmt 3390
4. Perf & Sqz 50 sx cmt @ 1260-1060'. WOC & Tag (T/Salt & 8 5/8" Shoe)
5. Spot 25 sx cmt @ 200' to surface. Spot 25 sx cmt 2824
6. Cut off well head, verify cmt @ surface, weld on Dry Hole Marker.

Spud Date: 4" diameter 4' tall Above Ground Marker

Rig Release Date: SEE ATTACHED CONDITIONS OF APPROVAL

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Delilah Flores TITLE Regulatory Technician I DATE 10/20/2021


Type or print name Delilah Flores E-mail address: delilah@mec.com PHONE: 575-748-1288  
**For State Use Only**

APPROVED BY: Kerry Fortner TITLE Compliance Officer A DATE 11/19/21  
Conditions of Approval (if any):

<b>Mack Energy Corporation</b>		<b>CURRENT</b>	
Author:	<b>Abby @ BCM</b>	Well No.	<b>#3</b>
Well Name	<b>State BD 36</b>	API #:	<b>30-025-41500</b>
Field/Pool	<b>Blinebry&amp;Brunson; Drinkard-Abo S</b>	Location:	<b>Sec 36, T22S, R37E</b>
County	<b>Lea</b>	State	<b>New Mexico</b>
Spud Date	<b>2/2/2015</b>	GL:	<b>3303'</b>

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	8 5/8	J55	32#	1,149	12 1/4	640	0
Prod Csg	5 1/2	L80	17#	8,095	7 7/8	1,200	0

Formation	Top
Anhy	1184
T/Salt	1260
B/Salt	2419
Yates	2563
7 Rivers	2824
Queen	3391
Grbg	3727
San Andres	3926
Glorieta	5110
Blinebry	5430
Tubb	6005
Drinkard	6292
Abo	6597

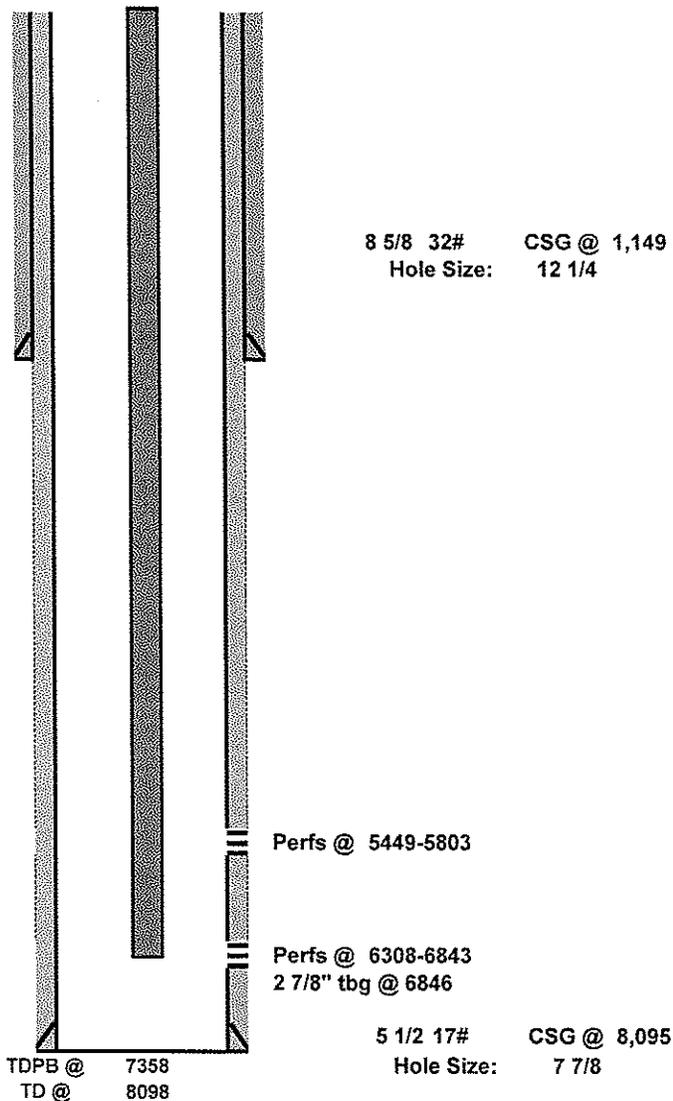


32.3472862  
-103.1132431

<b>Mack Energy Corporation</b>		<b>PROPOSED</b>	
Author:	<b>Abby @ BCM</b>	Well No.	<b>#3</b>
Well Name	<b>State BD 36</b>	API #:	<b>30-025-41500</b>
Field/Pool	<small>Blinebry&amp;Brunson; Drinkard-Abo S</small>	Location:	<b>Sec 36, T22S, R37E</b>
County	<b>Lea</b>		<b>2250 FSL &amp; 1590 FEL</b>
State	<b>New Mexico</b>	GL:	<b>3303'</b>
Spud Date	<b>2/2/2015</b>		

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	8 5/8	J55	32#	1,149	12 1/4	640	0
Prod Csg	5 1/2	L80	17#	8,095	7 7/8	1,200	0

Formation	Top
Anhy	1184
T/Salt	1260
B/Salt	2419
Yates	2563
7 Rivers	2824
Queen	3391
Grbg	3727
San Andres	3926
Glorieta	5110
Blinebry	5430
Tubb	6005
Drinkard	6292
Abo	6597

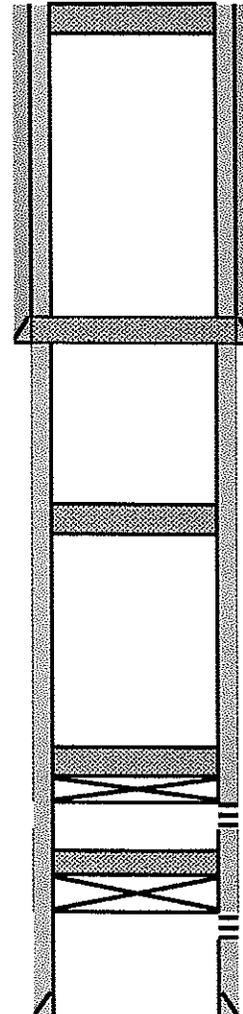

5. Spot 25 sx cmt @ 200' to surface.

8 5/8 32# CSG @ 1,149  
Hole Size: 12 1/4

4. Perf & Sqz 50 sx cmt @ 1260-1060'. WOC & Tag (T/Salt & 8 5/8" Shoe)

3. Spot 25 sx cmt @ 2470-2270'. WOC & Tag (B/Salt)

Spot 25 sx cmt 2824 (7 Rivers)

Spot 25 sx cmt 3390 (Queen)

Spot 25 sx cmt 3900 (Grbg & San Andres)

2. Set 5 1/2" CIBP @ 5400'. Circ hole w/ MLF. Pressure test csg. Spot 25 sx cmt @ 5400-5200'.  
WOC & Tag.  
Perfs @ 5449-5803

1. Set 5 1/2" CIBP @ 6258'. Spot 25 sx cmt @ 6258-6058'.  
Perfs @ 6308-6843

5 1/2 17# CSG @ 8,095  
Hole Size: 7 7/8

TDPB @ 7358  
TD @ 8098

**CONDITIONS OF APPROVAL  
FOR PLUGGING AND ABANDONMENT  
OCD - Southern District**

The following is a guide or checklist in preparation of a plugging program, this is not all inclusive and care must be exercised in establishing special plugging programs in unique and unusual cases, Notify NMOCD District Office I (Hobbs) at **(575)-263-6633** at least 24 hours before beginning work. After MIRU rig will remain on well until it is plugged to surface. OCD is to be notified before rig down.

**Company representative will be on location during plugging procedures.**

1. A notice of intent to plug and abandon a wellbore is required to be approved before plugging operations are conducted. A cement evaluation tool is required in order to ensure isolation of producing formations, protection of water and correlative rights. A cement bond log or other accepted cement evaluation tool is to be provided to the division for evaluation if one has not been previously run or if the well did not have cement circulated to surface during the original casing cementing job or subsequent cementing jobs. Insure all bradenheads have been exposed, identified and valves are operational prior to rig up.
2. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to a permitted disposal location.
3. Trucking companies being used to haul oilfield waste fluids to a disposal - commercial or private- shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator as well as the contractor, to verify that this permit is in place prior to performing work. Drivers shall be able to produce a copy upon request of an NMOCD Field inspector.
4. Filing a subsequent C-103 will serve as notification that the well has been plugged.
5. A final C-103 shall be filed (and a site inspection by NMOCD Inspector to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to Meet NMOCD standards) before bonding can be released.
6. If work has not begun within 1 Year of the approval of this procedure, an extension request must be file stating the reason the well has not been plugged.
7. Squeeze pressures are not to exceed 500 psi, unless approval is given by NMOCD.
8. Produced water will not be used during any part of the plugging operation.
9. Mud laden fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
10. All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
11. Class 'C' cement will be used above 7500 feet.
12. Class 'H' cement will be used below 7500 feet.
13. A cement plug is required to be set 50' above and 50' below, casing stubs, DV tools, attempted casing cut offs, cement tops outside casing, salt sections and anywhere the casing is perforated, these plugs require a 4 hour WOC and then will be tagged
14. All Casing Shoes Will Be Perforated 50' below shoe depth and Attempted to be Squeezed, cement needs to be 50' above and 50' Below Casing Shoe inside the Production Casing.
16. When setting the top out cement plug in production, intermediate and surface casing, wellbores should remain full at least 30 minutes after plugs are set
17. A CIBP is to be set within 100' of production perforations, capped with 100' of cement, WOC 4 hours and tag.
18. A CIBP with 35' of cement may be used in lieu of the 100' plug if set with a bailer. This plug will be placed within 100' of the top perforation, (WOC 4 hrs and tag).

19. No more than 3000' is allowed between cement plugs in cased hole and 2000' in open hole.
20. Some of the Formations to be isolated with cement plugs are: These plugs to be set to isolate formation tops
- A) Fusselman
  - B) Devonian
  - C) Morrow
  - D) Wolfcamp
  - E) Bone Springs
  - F) Delaware
  - G) Any salt sections
  - H) Abo
  - I) Glorieta
  - J) Yates.
  - K) Potash---(In the R-111-P Area (Potash Mine Area),  
A solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, WOC 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.

21. If cement does not exist behind casing strings at recommended formation depths, the casing can be cut and pulled with plugs set at recommended depths. If casing is not pulled, perforations will be shot and cement squeezed behind casing, WOC and tagged. These plugs will be set 50' below formation bottom to 50' above formation top inside the casing.

### **DRY HOLE MARKER REQUIREMENTS**

The operator shall mark the exact location of the plugged and abandoned well with a steel marker not less than four inches in diameter, 3' below ground level with a plate of at least ¼" welded to the top of the casing and the dry hole marker welded on the plate with the following information welded on the dry hole marker:

1. Operator name
2. Lease and Well Number
3. API Number
4. Unit letter
5. Quarter Section (feet from the North, South, East or West)
6. Section, Township and Range
7. Plugging Date
8. County

### **SPECIAL CASES -----AGRICULTURE OR PRARIE CHICKEN BREEDING AREAS**


In these areas, a below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to NMOCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to NMOCD (We typically require a current survey to verify the GPS)

### **SITE REMEDIATION DUE WITHIN ONE YEAR OF WELL PLUGGING COMPLETION**

<b>Mack Energy Corporation</b>		<b>CURRENT</b>	
Author:	<b>Abby @ BCM</b>	Well No.	<b>#3</b>
Well Name	<b>State BD 36</b>	API #:	<b>30-025-41500</b>
Field/Pool	<b>Blinbery&amp;Brunson; Drinkard-Abo S</b>	Location:	<b>Sec 36, T22S, R37E</b>
County	<b>Lea</b>	State	<b>New Mexico</b>
Spud Date	<b>2/2/2015</b>	GL:	<b>3303'</b>

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	8 5/8	J55	32#	1,149	12 1/4	640	0
Prod Csg	5 1/2	L80	17#	8,095	7 7/8	1,200	0

Formation	Top
Anhy	1184
T/Salt	1260
B/Salt	2419
Yates	2563
7 Rivers	2824
Queen	3391
Grbg	3727
San Andres	3926
Glorieta	5110
Blinbery	5430
Tubb	6005
Drinkard	6292
Abo	6597

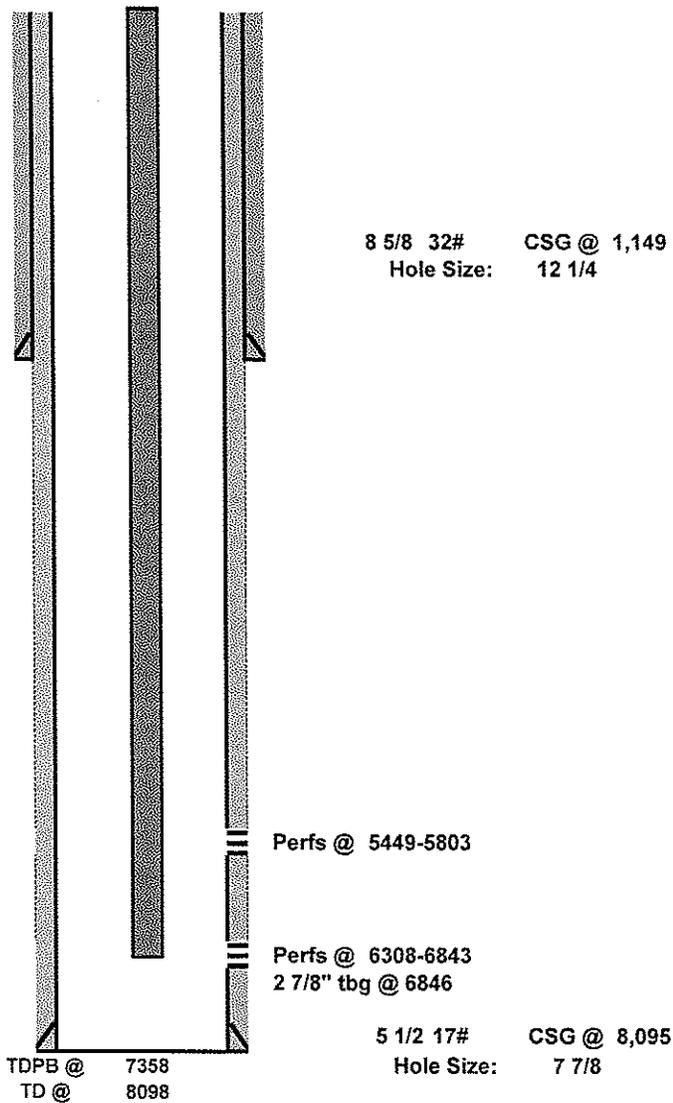


32.3472862  
-103.1132431

<b>Mack Energy Corporation</b>		<b>PROPOSED</b>	
Author:	<b>Abby @ BCM</b>	Well No.	<b>#3</b>
Well Name	<b>State BD 36</b>	API #:	<b>30-025-41500</b>
Field/Pool	<small>Blinebry&amp;Brunson; Drinkard-Abo S</small>	Location:	<b>Sec 36, T22S, R37E</b>
County	<b>Lea</b>		<b>2250 FSL &amp; 1590 FEL</b>
State	<b>New Mexico</b>	GL:	<b>3303'</b>
Spud Date	<b>2/2/2015</b>		

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	8 5/8	J55	32#	1,149	12 1/4	640	0
Prod Csg	5 1/2	L80	17#	8,095	7 7/8	1,200	0

Formation	Top
Anhy	1184
T/Salt	1260
B/Salt	2419
Yates	2563
7 Rivers	2824
Queen	3391
Grbg	3727
San Andres	3926
Glorieta	5110
Blinebry	5430
Tubb	6005
Drinkard	6292
Abo	6597

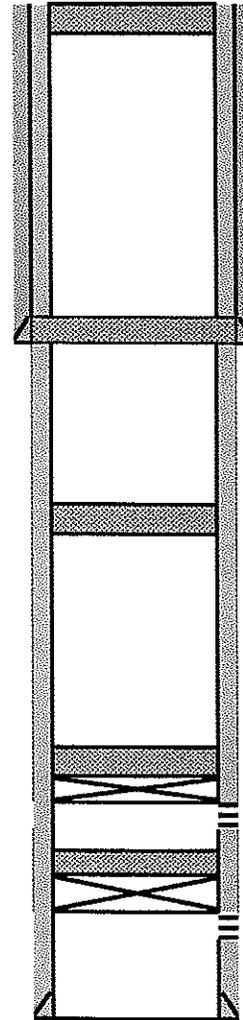

5. Spot 25 sx cmt @ 200' to surface.

8 5/8 32# CSG @ 1,149  
Hole Size: 12 1/4

4. Perf & Sqz 50 sx cmt @ 1260-1060'. WOC & Tag (T/Salt & 8 5/8" Shoe)

3. Spot 25 sx cmt @ 2470-2270'. WOC & Tag (B/Salt)

2. Set 5 1/2" CIBP @ 5400'. Circ hole w/ MLF. Pressure test csg. Spot 25 sx cmt @ 5400-5200'.  
WOC & Tag.  
Perfs @ 5449-5803

1. Set 5 1/2" CIBP @ 6258'. Spot 25 sx cmt @ 6258-6058'.  
Perfs @ 6308-6843

5 1/2 17# CSG @ 8,095  
Hole Size: 7 7/8

TDPB @ 7358  
TD @ 8098

**District I**  
 1625 N. French Dr., Hobbs, NM 88240  
 Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**  
 811 S. First St., Artesia, NM 88210  
 Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**  
 1220 S. St Francis Dr., Santa Fe, NM 87505  
 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS  
 Action 56940

**CONDITIONS**

Operator: MACK ENERGY CORP P.O. Box 960 Artesia, NM 882110960	OGRID: 13837
	Action Number: 56940
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

**CONDITIONS**

Created By	Condition	Condition Date
kfortner	See attached conditions of approval	11/19/2021