Form C-101

August 1, 2011

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

Permit 308108

		APPLICA	TION FOR	PERMIT	TO DRILL, RE-EI	NTER, DEEF	PEN, PLUG	BACK	, OR ADD	A ZON	ΙE				
	me and Address Iwood Operating L				- ,	· · · · · · · · · · · · · · · · · · ·	,		, -		ID Number 330211				
	Box 1370									3. API N					
	sia, NM 88211137										30-015-492	77			
4. Property Cod			5. Property Na							6. Well					
332	352		ьа	mboo Fee								003H			
						e Location									
UL - Lot	Section	Township	Rang		Lot Idn Fe	et From	N/S Line		Feet From		E/W Line	County			
М	1	188		26E		660		S	750)	W		Eddy		
					8. Proposed Bot	tom Hole Loca	ition								
UL - Lot	Section	Township	Rang		Lot Idn	Feet From	N/S Li		Feet From	E	E/W Line	County			
M	2	185	;	26E	M	330		S		1	W		Eddy		
					9. Pool Ir	nformation									
RED LAKE:GI	LORIETA-YESO				***************************************						51120				
											1				
						ell Information			1						
11. Work Type	v Well	12. Well Ty	pe DIL		13. Cable/Rotary	14. Le	ase Type Private		15. Gro	und Leve 3288	l Elevation				
16. Multiple	v vvcii	17. Propose			18. Formation	19 Co	ntractor		20. Spu						
N			3446		Yeso	10.00			20. 004	6/1/2	022				
Depth to Groun	d water	•			Distance from nearest from	esh water well			Distance	e to neare	est surface water				
Туре	Hole Size	Casing	•	2	21. Proposed Casing	and Cement		1	Sacks of C	'amont		Estimated	TOC		
Surf	12.25	9.62				1230				emem		Estimated			
Prod	8.75						•		450			0			
			36 26	12	•										
Prod	8.75	7 5.5	j			12 28	30		450	5		0			
Prod			j	Ca	26 17	12 28 84	30 75 46		450 132	5		0			
1	8.75	5.5	•		26 17 sing/Cement Progra	12 28 84 m: Additional	30 75 46 Comments	5 1/2" cs	450 132 525	5	oduction.	0			
1	8.75	5.5	•	230', run 9	26 17 sing/Cement Progra 5/8" csg/cmt. Drill 8 3	12 28 84 m: Additional 4/4" hole to 84	30 75 46 Comments 16' run 7" & 5	5 1/2" cs	450 132 525	5	oduction.	0			
1	8.75 erating LLC propo	5.5	•	230', run 9	26 17 sing/Cement Progra 5/8" csg/cmt. Drill 8 3 22. Proposed Blowo	12 28 84 m: Additional 4/4" hole to 84	30 75 46 Comments 16' run 7" & 5		450 1329 525 g/cmt, put we	5		0 0 0			
1	8.75 erating LLC propo	5.5	•	230', run 9	26 17 sing/Cement Progra 5/8" csg/cmt. Drill 8 3 22. Proposed Blowo	12 28 84 m: Additional 4/4" hole to 84	30 75 46 Comments 16' run 7" & 5	st Pressur	450 1329 525 g/cmt, put we	5		0			
1	8.75 erating LLC propo	5.5	•	230', run 9	26 17 sing/Cement Progra 5/8" csg/cmt. Drill 8 3 22. Proposed Blowo	12 28 84 m: Additional 4/4" hole to 84	30 75 46 Comments 16' run 7" & 5		450 1329 525 g/cmt, put we	5		0 0 0			
Redwood Op	8.75 erating LLC propo Type Double Ram	5.6 sed to drill 12 1	/4" hole to 1	230', run 9 : 2 Work	26 17 sing/Cement Progra 5/8" csg/cmt. Drill 8 3 22. Proposed Bloworing Pressure 3000	12 28 84 m: Additional 4/4" hole to 84	30 75 46 Comments 16' run 7" & 5	st Pressur 3000	450 132! 525 g/cmt, put we	5 sell on pro	Ma	0 0 0			
Redwood Op	8.75 erating LLC propo Type Double Ram ertify that the infor	5.6 sed to drill 12 1	/4" hole to 1	230', run 9 : 2 Work	26 17 sing/Cement Progra 5/8" csg/cmt. Drill 8 3 22. Proposed Blowo	12 28 84 m: Additional 4/4" hole to 84	30 75 46 Comments 16' run 7" & 5	st Pressur 3000	450 1329 525 g/cmt, put we	5 sell on pro	Ma	0 0 0			
Redwood Op 23. I hereby c knowledge ar	8.75 erating LLC propo Type Double Ram ertify that the infornd belief.	5.sed to drill 12 1	/4" hole to 1	230', run 9 s Work	26 17 sing/Cement Progra 5/8" csg/cmt. Drill 8 3 22. Proposed Bloworing Pressure 3000	12 28 84 m: Additional //4" hole to 84- ut Prevention	30 75 46 Comments 16' run 7" & 5	st Pressur 3000	450 132! 525 g/cmt, put we	5 sell on pro	Ma	0 0 0			
Redwood Op 23. I hereby c knowledge ar	8.75 erating LLC propo Type Double Ram ertify that the infornd belief. ify I have complie	5.sed to drill 12 1	/4" hole to 1	230', run 9 s Work	26 17 sing/Cement Progra 5/8" csg/cmt. Drill 8 3 22. Proposed Blowording Pressure 3000 e to the best of my	12 28 84 m: Additional //4" hole to 84- ut Prevention	30 75 46 Comments 16' run 7" & 5	st Pressur 3000	450 132! 525 g/cmt, put we	5 sell on pro	Ma	0 0 0			
Redwood Op 23. I hereby c knowledge at I further certi X, if application	8.75 erating LLC propo Type Double Ram ertify that the infornd belief. ify I have complie	5.sed to drill 12 1	/4" hole to 1	230', run 9 s Work	26 17 sing/Cement Progra 5/8" csg/cmt. Drill 8 3 22. Proposed Blowording Pressure 3000 e to the best of my	12 28 84 m: Additional //4" hole to 84- ut Prevention	30 75 46 Comments 16' run 7" & 5	st Pressur 3000	450 132! 525 g/cmt, put we	5 sell on pro	Ma	0 0 0			
Redwood Op 23. I hereby c knowledge at I further certi X, if applicat Signature:	8.75 erating LLC propo Type Double Ram ertify that the infornd belief. ify I have complied	5.sed to drill 12 1 mation given ab	/4" hole to 1	230', run 9 s Work	26 17 sing/Cement Progra 5/8" csg/cmt. Drill 8 3 22. Proposed Blowording Pressure 3000 e to the best of my	12 28 84 m: Additional I/4" hole to 84- ut Prevention	30 75 46 Comments 16' run 7" & 5 Program Te	st Pressur 3000 OI	450 132: 525 g/cmt, put we	5 sell on pro	Ma	0 0 0			
Redwood Op 23. I hereby c knowledge c knowledge i I further certi X, if applicate Signature: Printed Name:	8.75 erating LLC propo Type Double Ram ertify that the infornd belief. ify I have compliedle. Electronica	sed to drill 12 1 mation given ab d with 19.15.14	/4" hole to 1	230', run 9 s Work	26 17 sing/Cement Progra 5/8" csg/cmt. Drill 8 3 22. Proposed Blowording Pressure 3000 e to the best of my	12 28 84 m: Additional 1/4" hole to 84- ut Prevention	30 75 46 Comments 16' run 7" & 5 Program Te	st Pressur 3000 OI	450 132: 525 g/cmt, put we	5 sell on pro	Ma	0 0 0			
Redwood Op 23. I hereby c knowledge c knowledge i I further certi X, if applicate Signature: Printed Name: Title:	8.75 erating LLC propo Type Double Ram ertify that the infornd belief. ify I have compliedle. Electronica Regulatory	sed to drill 12 1 mation given ab d with 19.15.14 lly filed by Jerry Supervisor	/4" hole to 1	230', run 9 s Work	26 17 sing/Cement Progra 5/8" csg/cmt. Drill 8 3 22. Proposed Blowording Pressure 3000 e to the best of my	12 28 84 m: Additional //4" hole to 84- ut Prevention Approved By: Title:	30 75 46 Comments 16' run 7" & 5 Program Te Kath Geos	st Pressur 3000 OI erine Pic	450 132: 525 g/cmt, put we	5 is a self on pro	Ma	0 0 0			
Redwood Op 23. I hereby c knowledge c knowledge i I further certi X, if applicate Signature: Printed Name:	8.75 erating LLC propo Type Double Ram ertify that the infornd belief. ify I have compliedle. Electronica Regulatory	sed to drill 12 1 mation given ab d with 19.15.14 lly filed by Jerry Supervisor	ove is true a 9 (A) NMAC	230', run 9 s Work	26 17 sing/Cement Progra 5/8" csg/cmt. Drill 8 3 22. Proposed Blowo sing Pressure 3000 e to the best of my 19.15.14.9 (B) NMAC	12 28 84 m: Additional //4" hole to 84- ut Prevention Approved By: Title: Approved Dat	30 75 46 Comments 16' run 7" & 5 Program Te Kath Geos	st Pressur 3000 OI erine Pic scientist /2022	450 132: 525 g/cmt, put we	5 is a self on pro	Ma	0 0 0			

District I

1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 District III

1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462 State of New Mexico

Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION

1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

☐ AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Numbe	er	² Pool Code		
30-015-49277		51120	Red Lake; Glorieta-Yeso	
⁴ Property Code		⁵ Pı	roperty Name	⁶ Well Number
332352		BAN	ABOO FEE	3Н
⁷ OGRID No.		8 O	perator Name	⁹ Elevation
330211		REDWOOD	OPERATING LLC	3288.2

Surface Location

					Bulluce	Location					
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County		
M	1	18 S	26 E	E 660 SOUTH 7:		750	WEST	EDDY			
	" Bottom Hole Location If Different From Surface										
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County		
M	2	18 S 26 E		330 SOUTH 1				WEST	EDDY		
12 Dedicated Acres 13 Joint or Infill 14 Consolidation Code 15 Order No.											
160											

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

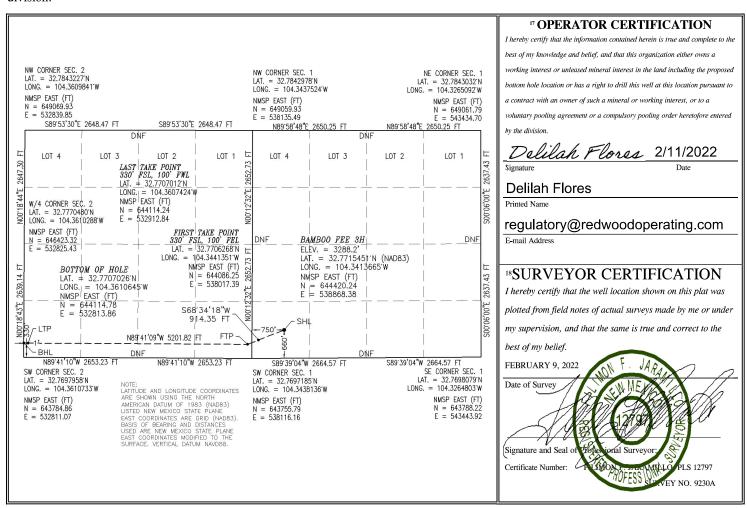

Intent		As Drill	ed										
API#]										
Opei	rator Nan	ne:	<u> </u>			Propert	y Name	:					Well Number
RED	WOOD	OPERATIN	NG LLC			ı	BAMBO	O FE	E				3H
Kick C	Off Point (кор)											
UL M	Section 1	Township 18S	Range 26E	Lot	Feet 660	Fro SO	om N/S DUTH	Feet 750		From WE	n E/W ST	County EDDY	
Latitu		15451			Longitu						NAD 83	<u> </u>	
	ake Poin		D	Lisa	l r		ora NI/C	T 5		-		County	
UL P	Section 2	Township 18S	Range 26E	Lot	Feet 330	SC	From N/S Feet 100			From E/W EAST		EDDÝ	
Latitu	de 32.770	6268			Longitu	ude 104.3 4	44135	1				NAD 83	}
Last T UL M	Section 2	Township 18S	Range 26E	Lot	Feet 330	From N,	/S Fee H 10		From WES	E/W 5 T	Count EDD	у Ү	
Latitu		707012		•	Longitu		860742	24	•		NAD	83	
		defining w	ell for the	e Horizo	ontal Spa	acing Unit	? [
	ng Unit.	olease prov	vide API i	f availa	able, Op	erator N	ame and	d well	numb	er fo	r Defii	ning well	for Horizontal
0:-	and a sc Ali					Duc	N						\A/=!! N!!-
Opei	rator Nan	ne:				Propert	y Name	:					Well Number

KZ 06/29/2018

ACCESS ROAD PLAT

ACCESS ROAD TO BAMBOO FEE 1H, 2H, 3H, 4H

REDWOOD OPERATING LLC
CENTERLINE SURVEY OF AN ACCESS ROAD CROSSING
SECTION 1, TOWNSHIP 18 SOUTH, RANGE 26 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO
FEBRUARY 9, 2022

DESCRIPTION

A STRIP OF LAND 30 FEET WIDE CROSSING FEE LAND IN SECTION 1, TOWNSHIP 18 SOUTH, RANGE 26 EAST, N.M.P.M., EDDY COUNTY, STATE OF NEW MEXICO AND BEING 15 FEET EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE SURVEY:

BEGINNING AT A POINT WITHIN THE SW/4 SW/4 OF SAID SECTION 1, TOWNSHIP 18 SOUTH, RANGE 26 EAST, N.M.P.M., WHENCE THE SOUTHWEST CORNER OF SAID SECTION 1, TOWNSHIP 18 SOUTH, RANGE 26 EAST, N.M.P.M. BEARS S89*39'04"W, A DISTANCE OF 480.07 FFFT:

THENCE N13'31'29"E A DISTANCE OF 479.84 FEET THE TERMINUS OF THIS CENTERLINE SURVEY, WHENCE THE SOUTHWEST CORNER OF SAID SECTION 1, TOWNSHIP 18 SOUTH, RANGE 26 EAST, N.M.P.M. BEARS S51'35'54"W, A DISTANCE OF 755.77 FEET;

SAID STRIP OF LAND BEING 479.84 FEET OR 29.08 RODS IN LENGTH, CONTAINING 0.330 ACRES MORE OR LESS AND BEING ALLOCATED BY FORTIES AS FOLLOWS:

SW/4 SW/4 479.84 L.F. 29.08 RODS 0.330 ACRES

SURVEYOR CERTIFICATE

GENERAL NOTES

1.) THE INTENT OF THIS ROUTE SURVEY IS TO ACQUIRE AN EASEMENT.

2.) BASIS OF BEARING AND DISTANCE IS NMSP EAST (NAD83) MODIFIED TO SURFACE COORDINATES. NAD 83 (FEET) AND NAVD 88 (FEET) COORDINATE SYSTEMS USED IN THE SURVEY.

SHEET: 4-4

MADRON SURVEYING, ÎNC. 301 SOUG

I, FILIMON F. JARAMILLO, A NEW MEXICO PROFESSIONAL SURVEYOR NO. 12797, HEREBY CERTIFY THAT I HAVE CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THAT THIS SURVEY AND PLAT MEET THE MINIMUM STANDARDS FOR LAND SURVEYING IN THE STATE OF NEW MEXICO.

IN WITNESS WHEREOF, THIS CERTIFICATE IS EXECUTED AT CARLSBAD,

NEW MEXICO THIS F9 JAPON OF FEBRUARY 2022

ME

MAI

SOLATION FOR AMELIO PLS 32 97

C. 301 SOLATION PLS 32 97

C. (575) 234-33

MADRON SURVEYING, INC. 301 SOUTH CANAL CARLSBAD, NEW MEXICO 88220 Phone (575) 234-3341

SURVEY NO. 9230A NEW MEXICO

Permit 308108

Form APD Conditions

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

<u>District II</u> 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 <u>District III</u>

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

PERMIT CONDITIONS OF APPROVAL

Operator	Name and Address:	API Number:
	Redwood Operating LLC [330211]	30-015-49277
	PO Box 1370	Well:
	Artesia, NM 882111370	Bamboo Fee #003H
OCD	Condition	

OCD	Condition
Reviewer	
kpickford	Notify OCD 24 hours prior to casing & cement
kpickford	Will require a File As Drilled C-102 and a Directional Survey with the C-104
kpickford	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud
	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
kpickford	Cement is required to circulate on both surface and intermediate1 strings of casing
	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system

I. Operator:

Redwood Operating LLC

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Date: 02 / 11 / 2022

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

OGRID:

330211

II. Type: ☒ Original □	l Amendment	due to \square 19.15.27.	9.D(6)(a) NMAC	C □ 19.15.27.9.D(6)(b) N	MAC □ Ot	her.	
If Other, please describe	:							
III. Well(s): Provide the be recompleted from a si					wells pro	oposed to b	e dril	led or proposed to
Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	l l	nticipated as MCF/D		Anticipated oduced Water BBL/D
Bamboo Fee 3H		Sec. 1 T18S R26E	660 FSL 750 FWL	100	100		1,00	00
V. Anticipated Schedul proposed to be recomple Well Name						et of wells p Initial Flo Back Da	ow	First Production Date
Bamboo Fee 3H		06/01/2022	07/01/2022	07/15/2022		07/15/2022		07/15/2022
VI. Separation Equipm VII. Operational Pract Subsection A through F VIII. Best Managemen during active and planne	ices: Attacof 19.15.27.8	ch a complete descr NMAC.	ription of the act	ions Operator wil	l take to	o comply w	ith th	ne requirements of

Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

		EFFECTIV	E APRIL 1, 2022	
Beginning April 1, 2 reporting area must co			with its statewide natural ga	as capture requirement for the applicable
☐ Operator certifies capture requirement f			tion because Operator is in o	compliance with its statewide natural gas
IX. Anticipated Nat	ural Gas Production	on:		
We	11	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF
X. Natural Gas Gatl	hering System (NC	GGS):		
Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in
production operations the segment or portion XII. Line Capacity. production volume from XIII. Line Pressure. natural gas gathering Attach Operator's XIV. Confidentiality Section 2 as provided	s to the existing or p n of the natural gas The natural gas ga om the well prior to Operator Operator does system(s) described plan to manage pro y: Operator asso in Paragraph (2) of	blanned interconnect of the gathering system(s) to we thering system will the blanch date of first product does not anticipate the datove will continue to be duction in response to the confidentiality pursue.	he natural gas gathering systewhich the well(s) will be considered will not have capacity to getion. At its existing well(s) connect meet anticipated increases in the increased line pressure. But to Section 71-2-8 NMS 27.9 NMAC, and attaches a few which the well (s) will be considered increased line pressure.	ticipated pipeline route(s) connecting the em(s), and the maximum daily capacity of nected. ather 100% of the anticipated natural gas ted to the same segment, or portion, of the a line pressure caused by the new well(s). SA 1978 for the information provided in full description of the specific information

(i)

Section 3 - Certifications <u>Effective May 25, 2021</u>

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal: 🛮 Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system: or ☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. If Operator checks this box, Operator will select one of the following: Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or Venting and Flaring Plan.

Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including: power generation on lease; (a) **(b)** power generation for grid; compression on lease; (c) (d) liquids removal on lease; reinjection for underground storage; (e) **(f)** reinjection for temporary storage; **(g)** reinjection for enhanced oil recovery; fuel cell production; and (h)

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

other alternative beneficial uses approved by the division.

- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: Delilah Flores
Printed Name: Delilah Flores
Title: Regulatory Technician I
E-mail Address: regulatory@redwoodoperating.com
Date: 02/11/2022
Phone:
575-748-1288
OIL CONSERVATION DIVISION
(Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

VI. Separation Equipment:

Redwood Operating LLC production facilities include separation equipment designed to efficiently separate gas from liquid phases to optimize gas capture based on projected and estimated volumes from the targeted pool of our completion project. Redwood Operating LLC will utilize flowback separation equipment and production separation equipment designed and built to industry specifications after the completion to optimize gas capture and send gas to sales or flare based on analytical composition. Redwood Operating LLC operates facilities that are typically multi-well facilities. Production separation equipment is upgraded prior to new wells being completed, if determined to be undersized or inadequate. This equipment is already on-site and tied into our sales gas lines prior to the new drill operations.

VII. Operational Practices:

- 1. Subsection (A) Venting and Flaring of Natural Gas. Redwood Operating LLC understands the requirements of NMAC 19.15.27.8 which outlines that the venting and flaring of natural gas during drilling, completion or production operations that constitutes waste as defined in 19.15.2 are prohibited.
- 2. Subsection (B) Venting and Flaring during drilling operations. This gas capture plan isn't for a well being drilled.
- 3. Subsection (C) Venting and flaring during completion or recompletion. Flowlines will be routed for flowback fluids into a completion or storage tank and if feasible under well conditions, flare rather than vent and commence operation of a separator as soon as it is technically feasible for a separator to function.
 - At any point in the well life (completion, production, inactive) an audio, visual and olfactory inspection be performed at prescribed intervals (weekly or monthly) pursuant to Subsection D of 19.15.27.8 NMAC, to confirm that all production equipment is operating properly and there are no leaks or releases.
- 4. Subsection (D) Venting and flaring during production operations o At any point in the well life (completion, production, inactive) an audio, visual and olfactory inspection be performed at prescribed intervals (weekly or monthly) pursuant to Subsection D of 19.15.27.8 NMAC, to confirm that all production equipment is operating properly and there are no leaks or releases.
 - Monitor manual liquid unloading for wells on-site or in close proximity (<30 minutes' drive time), take reasonable actions to achieve a stabilized rate and pressure at the earliest practical time, and take reasonable actions to minimize venting to the maximum extent practicable.
 - Redwood Operating LLC will not vent or flare except during the approved activities listed in NMAC 19.15.27.8 (D) 14.
- 5. Subsection (E) Performance standards o All tanks and separation equipment are designed for maximum throughput and pressure to minimize waste.
 - If a flare is utilized during production operations it will have a continuous pilot and is located more than 100 feet from any known well or storage tanks.
 - At any point in the well life (completion, production, inactive) an audio, visual and olfactory inspection be performed at prescribed intervals (weekly or monthly) pursuant to Subsection D of 19.15.27.8 NMAC, to confirm that all production equipment is operating properly and there are no leaks or releases.

- 6. Subsection (F) Measurement or estimation of vented and flared natural gas o Measurement equipment is installed to measure the volume of natural gas flared from process piping.
 - When measurement isn't practicable, estimation of vented and flared natural gas will be completed as noted in 19.15.27.8 (F) 5-6.

VIII. Best Management Practices:

- 1. Redwood Operating LLC has adequate storage and takeaway capacity for wells it chooses to complete as the flowlines at the sites are already in place and tied into a gathering system.
- 2. Redwood Operating LLC will flare rather than vent vessel blowdown gas when technically feasible during active and/or planned maintenance to equipment on-site.
- 3. Redwood Operating LLC combusts natural gas that would otherwise be vented or flared, when technically feasible.
- 4. Redwood Operating LLC will shut in wells in the event of a takeaway disruption, emergency situation, or other operations where venting or flaring may occur due to equipment failures.

Bamboo Fee 3H, Plan 1

OperatorRedwood Operating LLCUnitsfeet, °/100ft14:25 Thursday, February 10, 2022 Page 1 of 4FieldRed LakeCountyEddyVertical Section Azimuth270.31Well NameBamboo Fee 3HStateNew MexicoSurvey Calculation MethodMinimum CurvaturePlan1CountryUSADatabaseAccess

Location SL: 660 FSL & 750 FWL Section 1-T18S-R26E BHL:

330 FSL & 1 FWL Secition 2-T18S-R26E

Site

Slot Name UWI Well Number 3H API

Project MD/TVD Ref KB

Map Zone UTM

Surface X 1842880.5 **Surface Y** 11896073.8

Surface Z 3306.2

Ground Level 3288.2

Lat Long Ref

Surface Long
Surface Lat
Global Z Ref KB

Local North Ref Grid

DIRECTIONAL WELL PLAN

MD*	INC*	AZI*	TVD*	N*	E*		V. S.*	MapE*	MapN*	SysTVD*
*** TIE (at MD	= 1776.00)	dod	ft_	ft	ft	°/1∩∩ f f	fi	f t	f1	f+
1776.00	0.00	0.0	1776.00	0.00	0.00		0.00	1842880.50	11896073.80	1530.20
1800.00	0.00	0.0	1800.00	0.00	0.00	0.00	0.00	1842880.50	11896073.80	1506.20
1850.00	0.00	0.0	1850.00	0.00	0.00	0.00	0.00	1842880.50	11896073.80	1456.20
*** KOP 8 DEG	REES (at N	ИD = 1876	5.00)							
1876.00	0.00	0.0	1876.00	0.00	0.00	0.00	0.00	1842880.50	11896073.80	1430.20
1900.00	1.92	241.7	1900.00	-0.19	-0.35	8.00	0.35	1842880.15	11896073.61	1406.20
1950.00	5.92	241.7	1949.87	-1.81	-3.36	8.00	3.35	1842877.14	11896071.99	1356.33
2000.00	9.92	241.7	1999.38	-5.08	-9.43	8.00	9.40	1842871.07	11896068.72	1306.82
2050.00	13.92	241.7	2048.29	-9.97	-18.52	8.00	18.46	1842861.98	11896063.83	1257.91
2100.00	17.92	241.7	2096.37	-16.47	-30.59	8.00	30.50	1842849.91	11896057.33	1209.83
2150.00	21.92	241.7	2143.36	-24.55	-45.59	8.00	45.45	1842834.91	11896049.25	1162.84
2200.00	25.92	241.7	2189.06	-34.16	-63.43	8.00	63.25	1842817.07	11896039.64	1117.14
2250.00	29.92	241.7	2233.23	-45.25	-84.04	8.00	83.80	1842796.46	11896028.55	1072.97
2300.00	33.92	241.7	2275.66	-57.78	-107.32	8.00	107.00	1842773.18	11896016.02	1030.54
2350.00	37.92	241.7	2316.15	-71.69	-133.14	8.00	132.75	1842747.36	11896002.11	990.05
2400.00	41.92	241.7	2354.49	-86.90	-161.38	8.00	160.91	1842719.12	11895986.90	951.71
2450.00	45.92	241.7	2390.49	-103.34	-191.91	8.00	191.35	1842688.59	11895970.46	915.71
2500.00	49.92	241.7	2424.00	-120.93	-224.58	8.00	223.92	1842655.92	11895952.87	882.20
2550.00	53.92	241.7	2454.83	-139.58	-259.23	8.00	258.47	1842621.27	11895934.22	851.37
*** 55 DEGREE										
2563.50	55.00	241.7	2462.67	-144.79	-268.90	8.00	268.11	1842611.60	11895929.01	843.53
2600.00	55.00	241.7	2483.61	-158.96	-295.23	0.00	294.36	1842585.27	11895914.84	822.59
2650.00	55.00	241.7	2512.29	-178.38	-331.29	0.00	330.32	1842549.21	11895895.42	793.91
2700.00	55.00	241.7	2540.97	-197.80	-367.35	0.00	366.28	1842513.15	11895876.00	765.23
2750.00	55.00	241.7	2569.65	-217.22	-403.41	0.00	402.23	1842477.09	11895856.58	736.55
2800.00	55.00	241.7	2598.33	-236.63	-439.48	0.00	438.19	1842441.02	11895837.17	707.87
*** 10 DEGREE	E BUILD (at	MD = 281	13.50)							
2813.50	55.00	241.7	2606.07	-241.88	-449.21	0.00	447.90	1842431.29	11895831.92	700.13
2850.00	57.69	244.7	2626.30	-255.57	-476.32	10.00	474.93	1842404.18	11895818.23	679.90
2900.00	61.47	248.5	2651.62	-272.68	-515.88	10.00	514.39	1842364.62	11895801.12	654.58
2950.00	65.35	252.0	2674.00	-287.78	-557.94	10.00	556.38	1842322.56	11895786.02	632.20
3000.00	69.31	255.3	2693.27	-300.75	-602.20	10.00	600.57	1842278.30	11895773.05	612.93
3050.00	73.33	258.4	2709.29	-311.49	-648.32	10.00	646.62	1842232.18	11895762.31	596.91
3100.00	77.39	261.4	2721.92	-319.93	-695.94	10.00	694.19	1842184.56	11895753.87	584.28
3150.00	81.49	264.4	2731.08	-325.98	-744.70	10.00	742.92	1842135.80	11895747.82	575.12
3200.00	85.61	267.2	2736.70	-329.62	-794.23	10.00	792.44	1842086.27	11895744.18	569.50
3250.00	89.74	270.0	2738.73	-330.81	-844.16	10.00	842.36	1842036.34	11895742.99	567.47

Page 1 of 4 SES v5.79 www.makinhole.c

Lat Long Ref

Surface Long

Surface Lat

Bamboo Fee 3H, Plan 1

OperatorRedwood Operating LLCUnitsfeet, °/100ft14:25 Thursday, February 10, 2022 Page 2 of 4FieldRed LakeCountyEddyVertical Section Azimuth270.31Well NameBamboo Fee 3HStateNew MexicoSurvey Calculation MethodMinimum Curvature

Map Zone UTM

Surface X 1842880.5

Surface Y 11896073.8

Plan 1 Country USA Database Access

Location SL: 660 FSL & 750 FWL Section 1-T18S-R26E BHL: 330 FSL & 1 FWL Secition 2-T18S-R26E

Site

Slot Name UWI Well Number 3H API

Number3HAPISurface Z3306.2Global Z RefKBProjectMD/TVD RefKBGround Level3288.2Local North RefGrid

DIRECTIONAL WELL PLAN

DIRECTIONAL WELL I LAN										
MD*	INC*	AZI*	TVD*	N*	E*	DLS*	V. S.*	MapE*	MapN* S	SysTVD*
*** LANDING F	POINT (at N	ИD = 3254.	74)			-7-111111		**		
3254.74	90.13	270.3	2738.73	-330.80	-848.90	10.00	847.10	1842031.60	11895743.00	567.47
3300.00	90.13	270.3	2738.63	-330.55	-894.16	0.00	892.36	1841986.34	11895743.25	567.57
3350.00	90.13	270.3	2738.52	-330.28	-944.16	0.00	942.36	1841936.34	11895743.52	567.68
3400.00	90.13	270.3	2738.40	-330.01	-994.16	0.00	992.36	1841886.34	11895743.79	567.80
3450.00	90.13	270.3	2738.29	-329.74	-1044.16	0.00	1042.36	1841836.34	11895744.06	567.91
3500.00	90.13	270.3	2738.18	-329.47	-1094.16	0.00	1092.36	1841786.34	11895744.33	568.02
3550.00	90.13	270.3	2738.06	-329.20	-1144.16	0.00	1142.36	1841736.34	11895744.60	568.14
3600.00	90.13	270.3	2737.95	-328.93	-1194.15	0.00	1192.36	1841686.35	11895744.87	568.25
3650.00	90.13	270.3	2737.84	-328.66	-1244.15	0.00	1242.36	1841636.35	11895745.14	568.36
3700.00	90.13	270.3	2737.72	-328.39	-1294.15	0.00	1292.36	1841586.35	11895745.41	568.48
3750.00	90.13	270.3	2737.61	-328.12	-1344.15	0.00	1342.36	1841536.35	11895745.68	568.59
3800.00	90.13	270.3	2737.50	-327.85	-1394.15	0.00	1392.36	1841486.35	11895745.95	568.70
3850.00	90.13	270.3	2737.38	-327.58	-1444.15	0.00	1442.36	1841436.35	11895746.22	568.82
3900.00	90.13	270.3	2737.27	-327.31	-1494.15	0.00	1492.36	1841386.35	11895746.49	568.93
3950.00	90.13	270.3	2737.16	-327.04	-1544.15	0.00	1542.36	1841336.35	11895746.76	569.04
4000.00	90.13	270.3	2737.04	-326.77	-1594.15	0.00	1592.36	1841286.35	11895747.03	569.16
4050.00	90.13	270.3	2736.93	-326.50	-1644.15	0.00	1642.36	1841236.35	11895747.30	569.27
4100.00	90.13	270.3	2736.82	-326.23	-1694.15	0.00	1692.36	1841186.35	11895747.57	569.38
4150.00	90.13	270.3	2736.70	-325.96	-1744.15	0.00	1742.36	1841136.35	11895747.84	569.50
4200.00	90.13	270.3	2736.59	-325.69	-1794.14	0.00	1792.36	1841086.36	11895748.11	569.61
4250.00	90.13	270.3	2736.48	-325.41	-1844.14	0.00	1842.36	1841036.36	11895748.39	569.72
4300.00	90.13	270.3	2736.36	-325.14	-1894.14	0.00	1892.36	1840986.36	11895748.66	569.84
4350.00	90.13	270.3	2736.25	-324.87	-1944.14	0.00	1942.36	1840936.36	11895748.93	569.95
4400.00	90.13	270.3	2736.14	-324.60	-1994.14	0.00	1992.36	1840886.36	11895749.20	570.06
4450.00	90.13	270.3	2736.02	-324.33	-2044.14	0.00	2042.36	1840836.36	11895749.47	570.18
4500.00	90.13	270.3	2735.91	-324.06	-2094.14	0.00	2092.36	1840786.36	11895749.74	570.29
4550.00	90.13	270.3	2735.80	-323.79	-2144.14	0.00	2142.36	1840736.36	11895750.01	570.40
4600.00	90.13	270.3	2735.68	-323.52	-2194.14	0.00	2192.36	1840686.36	11895750.28	570.52
4650.00	90.13	270.3	2735.57	-323.25	-2244.14	0.00	2242.36	1840636.36	11895750.55	570.63
4700.00	90.13	270.3	2735.45	-322.98	-2294.14	0.00	2292.35	1840586.36	11895750.82	570.75
4750.00	90.13	270.3	2735.34	-322.71	-2344.14	0.00	2342.35	1840536.36	11895751.09	570.86
4800.00	90.13	270.3	2735.23	-322.44	-2394.13	0.00	2392.35	1840486.37	11895751.36	570.97
4850.00	90.13	270.3	2735.11	-322.17	-2444.13	0.00	2442.35	1840436.37	11895751.63	571.09
4900.00	90.13	270.3	2735.00	-321.90	-2494.13	0.00	2492.35	1840386.37	11895751.90	571.20
4950.00	90.13	270.3	2734.89	-321.63	-2544.13	0.00	2542.35	1840336.37	11895752.17	571.31
5000.00	90.13	270.3	2734.77	-321.36	-2594.13	0.00	2592.35	1840286.37	11895752.44	571.43

Page 2 of 4 SES v5.79 www.makinhole.co

Bamboo Fee 3H, Plan 1

Units feet, °/100ft 14:25 Thursday, February 10, 2022 Page 3 of 4 **Operator** Redwood Operating LLC Field Red Lake County Eddy Vertical Section Azimuth 270.31 Well Name Bamboo Fee 3H State New Mexico **Survey Calculation Method** Minimum Curvature Plan 1 **Country** USA **Database** Access

Location SL: 660 FSL & 750 FWL Section 1-T18S-R26E BHL:

330 FSL & 1 FWL Secition 2-T18S-R26E

Site

Slot Name Well Number 3H **Project**

UWI API

MD/TVD Ref KB

Map Zone UTM

Ground Level 3288.2

Surface X 1842880.5 **Surface Y** 11896073.8 **Surface Z** 3306.2

Surface Long Surface Lat Global Z Ref KB Local North Ref Grid

Lat Long Ref

DIRECTIONAL WELL PLAN

										_
MD*	INC*	AZI*	TVD*	N*	E*	DLS*	V. S.*	MapE*	MapN*	SysTVD*
5050.00	90.13	270.3	2734.66	-321.09	-2644.13	0.00	2642.35	1840236.37	11895752.71	571.54
5100.00	90.13	270.3	2734.55	-320.82	-2694.13	0.00	2692.35	1840186.37	11895752.98	571.65
5150.00	90.13	270.3	2734.43	-320.55	-2744.13	0.00	2742.35	1840136.37	11895753.25	571.77
5200.00	90.13	270.3	2734.32	-320.27	-2794.13	0.00	2792.35	1840086.37	11895753.53	571.88
5250.00	90.13	270.3	2734.21	-320.00	-2844.13	0.00	2842.35	1840036.37	11895753.80	571.99
5300.00	90.13	270.3	2734.09	-319.73	-2894.13	0.00	2892.35	1839986.37	11895754.07	572.11
5350.00	90.13	270.3	2733.98	-319.46	-2944.12	0.00	2942.35	1839936.38	11895754.34	572.22
5400.00	90.13	270.3	2733.87	-319.19	-2994.12	0.00	2992.35	1839886.38	11895754.61	572.33
5450.00	90.13	270.3	2733.75	-318.92	-3044.12	0.00	3042.35	1839836.38	11895754.88	572.45
5500.00	90.13	270.3	2733.64	-318.65	-3094.12	0.00	3092.35	1839786.38	11895755.15	572.56
5550.00	90.13	270.3	2733.53	-318.38	-3144.12	0.00	3142.35	1839736.38	11895755.42	572.67
5600.00	90.13	270.3	2733.41	-318.11	-3194.12	0.00	3192.35	1839686.38	11895755.69	572.79
5650.00	90.13	270.3	2733.30	-317.84	-3244.12	0.00	3242.35	1839636.38	11895755.96	572.90
5700.00	90.13	270.3	2733.19	-317.57	-3294.12	0.00	3292.35	1839586.38	11895756.23	573.01
5750.00	90.13	270.3	2733.07	-317.30	-3344.12	0.00	3342.35	1839536.38	11895756.50	573.13
5800.00	90.13	270.3	2732.96	-317.03	-3394.12	0.00	3392.35	1839486.38	11895756.77	573.24
5850.00	90.13	270.3	2732.85	-316.76	-3444.12	0.00	3442.35	1839436.38	11895757.04	573.35
5900.00	90.13	270.3	2732.73	-316.49	-3494.12	0.00	3492.35	1839386.38	11895757.31	573.47
5950.00	90.13	270.3	2732.62	-316.22	-3544.11	0.00	3542.35	1839336.39	11895757.58	573.58
6000.00	90.13	270.3	2732.51	-315.95	-3594.11	0.00	3592.35	1839286.39	11895757.85	573.69
6050.00	90.13	270.3	2732.39	-315.68	-3644.11	0.00	3642.35	1839236.39	11895758.12	573.81
6100.00	90.13	270.3	2732.28	-315.41	-3694.11	0.00	3692.35	1839186.39	11895758.39	573.92
6150.00	90.13	270.3	2732.16	-315.13	-3744.11	0.00	3742.35	1839136.39	11895758.67	574.04
6200.00	90.13	270.3	2732.05	-314.86	-3794.11	0.00	3792.35	1839086.39	11895758.94	574.15
6250.00	90.13	270.3	2731.94	-314.59	-3844.11	0.00	3842.35	1839036.39	11895759.21	574.26
6300.00	90.13	270.3	2731.82	-314.32	-3894.11	0.00	3892.35	1838986.39	11895759.48	574.38
6350.00	90.13	270.3	2731.71	-314.05	-3944.11	0.00	3942.35	1838936.39	11895759.75	574.49
6400.00	90.13	270.3	2731.60	-313.78	-3994.11	0.00	3992.35	1838886.39	11895760.02	574.60
6450.00	90.13	270.3	2731.48	-313.51	-4044.11	0.00	4042.35	1838836.39	11895760.29	574.72
6500.00	90.13	270.3	2731.37	-313.24	-4094.11	0.00	4092.35	1838786.40	11895760.56	574.83
6550.00	90.13	270.3	2731.26	-312.97	-4144.10	0.00	4142.35	1838736.40	11895760.83	574.94
6600.00	90.13	270.3	2731.14	-312.70	-4194.10	0.00	4192.35	1838686.40	11895761.10	575.06
6650.00	90.13	270.3	2731.03	-312.43	-4244.10	0.00	4242.35	1838636.40	11895761.37	575.17
6700.00	90.13	270.3	2730.92	-312.16	-4294.10	0.00	4292.35	1838586.40	11895761.64	575.28
6750.00	90.13	270.3	2730.80	-311.89	-4344.10	0.00	4342.35	1838536.40	11895761.91	575.40
6800.00	90.13	270.3	2730.69	-311.62	-4394.10	0.00	4392.35	1838486.40	11895762.18	575.51
6850.00	90.13	270.3	2730.58	-311.35	-4444.10	0.00	4442.35	1838436.40	11895762.45	575.62

Bamboo Fee 3H, Plan 1

OperatorRedwood Operating LLCUnitsfeet, °/100ft14:25 Thursday, February 10, 2022 Page 4 of 4FieldRed LakeCountyEddyVertical Section Azimuth270.31Well NameBamboo Fee 3HStateNew MexicoSurvey Calculation MethodMinimum CurvaturePlan1CountryUSADatabaseAccess

Location SL: 660 FSL & 750 FWL Section 1-T18S-R26E BHL:

330 FSL & 1 FWL Secition 2-T18S-R26E

Site

Slot Name UWI Well Number 3H API

Project MD/TVD Ref KB

Map Zone UTM

Surface X 1842880.5 Surface Y 11896073.8 Surface Z 3306.2

Ground Level 3288.2

Lat Long Ref

Surface Long
Surface Lat
Global Z Ref KB

Local North Ref Grid

DIRECTIONAL WELL PLAN

MD*	INC*	AZI*	TVD*	N*	E*	DLS*	V. S.*	MapE*	MapN* S	SysTVD*
ft	doa	doa	ft	ft	-ft	°/100ff	ft	ft	- ft	ft
6900.00	90.13	270.3	2730.46	-311.08	-4494.10	0.00	4492.35	1838386.40	11895762.72	575.74
6950.00	90.13	270.3	2730.35	-310.81	-4544.10	0.00	4542.35	1838336.40	11895762.99	575.85
7000.00	90.13	270.3	2730.24	-310.54	-4594.10	0.00	4592.35	1838286.40	11895763.26	575.96
7050.00	90.13	270.3	2730.12	-310.27	-4644.10	0.00	4642.35	1838236.40	11895763.53	576.08
7100.00	90.13	270.3	2730.01	-310.00	-4694.09	0.00	4692.35	1838186.41	11895763.81	576.19
7150.00	90.13	270.3	2729.90	-309.72	-4744.09	0.00	4742.35	1838136.41	11895764.08	576.30
7200.00	90.13	270.3	2729.78	-309.45	-4794.09	0.00	4792.35	1838086.41	11895764.35	576.42
7250.00	90.13	270.3	2729.67	-309.18	-4844.09	0.00	4842.35	1838036.41	11895764.62	576.53
7300.00	90.13	270.3	2729.56	-308.91	-4894.09	0.00	4892.35	1837986.41	11895764.89	576.64
7350.00	90.13	270.3	2729.44	-308.64	-4944.09	0.00	4942.35	1837936.41	11895765.16	576.76
7400.00	90.13	270.3	2729.33	-308.37	-4994.09	0.00	4992.35	1837886.41	11895765.43	576.87
7450.00	90.13	270.3	2729.22	-308.10	-5044.09	0.00	5042.35	1837836.41	11895765.70	576.98
7500.00	90.13	270.3	2729.10	-307.83	-5094.09	0.00	5092.35	1837786.41	11895765.97	577.10
7550.00	90.13	270.3	2728.99	-307.56	-5144.09	0.00	5142.35	1837736.41	11895766.24	577.21
7600.00	90.13	270.3	2728.88	-307.29	-5194.09	0.00	5192.35	1837686.41	11895766.51	577.33
7650.00	90.13	270.3	2728.76	-307.02	-5244.09	0.00	5242.35	1837636.41	11895766.78	577.44
7700.00	90.13	270.3	2728.65	-306.75	-5294.08	0.00	5292.35	1837586.42	11895767.05	577.55
7750.00	90.13	270.3	2728.53	-306.48	-5344.08	0.00	5342.35	1837536.42	11895767.32	577.67
7800.00	90.13	270.3	2728.42	-306.21	-5394.08	0.00	5392.35	1837486.42	11895767.59	577.78
7850.00	90.13	270.3	2728.31	-305.94	-5444.08	0.00	5442.35	1837436.42	11895767.86	577.89
7900.00	90.13	270.3	2728.19	-305.67	-5494.08	0.00	5492.35	1837386.42	11895768.13	578.01
7950.00	90.13	270.3	2728.08	-305.40	-5544.08	0.00	5542.35	1837336.42	11895768.40	578.12
8000.00	90.13	270.3	2727.97	-305.13	-5594.08	0.00	5592.35	1837286.42	11895768.67	578.23
8050.00	90.13	270.3	2727.85	-304.86	-5644.08	0.00	5642.35	1837236.42	11895768.95	578.35
8100.00	90.13	270.3	2727.74	-304.58	-5694.08	0.00	5692.35	1837186.42	11895769.22	578.46
8150.00	90.13	270.3	2727.63	-304.31	-5744.08	0.00	5742.35	1837136.42	11895769.49	578.57
8200.00	90.13	270.3	2727.51	-304.04	-5794.08	0.00	5792.35	1837086.42	11895769.76	578.69
8250.00	90.13	270.3	2727.40	-303.77	-5844.07	0.00	5842.35	1837036.43	11895770.03	578.80
8300.00	90.13	270.3	2727.29	-303.50	-5894.07	0.00	5892.35	1836986.43	11895770.30	578.91
8350.00	90.13	270.3	2727.17	-303.23	-5944.07	0.00	5942.35	1836936.43	11895770.57	579.03
8400.00	90.13	270.3	2727.06	-302.96	-5994.07	0.00	5992.35	1836886.43	11895770.84	579.14
*** TD (at MD = 8445.74)										
8445.74	90.13	270.3	2726.96	-302.71	-6039.82	0.00	6038.09	1836840.68	11895771.09	579.24

Page 4 of 4 SES v5.79 www.makinhole.co