

Well Name: JICARILLA F 160	Well Location: T23N / R2W / SEC 13 / SWNE /	County or Parish/State: RIO ARRIBA / NM
Well Number: 1Y	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name: JICARILLA APACHE
Lease Number: JIC160	Unit or CA Name:	Unit or CA Number:
US Well Number: 3003905066	Well Status: Producing Gas Well	Operator: DJR OPERATING LLC

Notice of Intent

Sundry ID: 2676768
Type of Submission: Notice of Intent
Date Sundry Submitted: 06/14/2022
Date proposed operation will begin: 06/14/2022
Type of Action: Plug and Abandonment
Time Sundry Submitted: 01:04

Procedure Description: This request is being submitted for engineering & geological review prior to onsite inspection as approved by Dave M. of the BLM. DJR Operating, LLC requests permission to Plug & Abandon the subject well according to the attached Procedure, Current & Proposed Wellbore Diagram.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

NOI_PA_BLM_Submittal_20220614130407.pdf

Well Name: JICARILLA F 160	Well Location: T23N / R2W / SEC 13 / SWNE /	County or Parish/State: RIO ARRIBA / NM
Well Number: 1Y	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name: JICARILLA APACHE
Lease Number: JIC160	Unit or CA Name:	Unit or CA Number:
US Well Number: 3003905066	Well Status: Producing Gas Well	Operator: DJR OPERATING LLC

Conditions of Approval

Additional

23N2W13JicarillaF1601YKGR_20220627143830.pdf
General_Requirement_PxA_20220627143629.pdf
2676768_NOIA_1Y_3003905066_KR_06272022_20220627143518.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHAW-MARIE FORD	Signed on: JUN 14, 2022 01:04 PM
Name: DJR OPERATING LLC	
Title: Regulatory Specialist	
Street Address: 1 Road 3263	
City: Aztec	State: NM
Phone: (505) 632-3476	
Email address: sford@djrlc.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5055647742	BLM POC Email Address: krennick@blm.gov
Disposition: Approved	Disposition Date: 06/27/2022
Signature: Kenneth Rennick	

Plug and Abandonment Procedure
for
DJR Operating, LLC
Jicarilla F 160 1Y
API # 30-039-05066
SW/NE, Unit G, Sec. 13, T23N, R2W
Rio Arriba County, NM

I.

1. Hold Pre job meeting, comply with all NMOCD, BLM and environmental regulations.
2. MIRU rig.
3. Check and record tubing, casing and bradenhead pressures.
4. Remove existing piping from casing valve, RU blow lines from casing valves and blow down casing pressure. Kill well as necessary. Ensure that well is dead or on a vacuum.
5. ND WH, NU BOP, function test BOP.
6. Trip out of hole with 1-1/4" tubing. LD tubing to be sent in for storage/salvage.

II.

7. PU bit and 4-1/2" casing scraper on workstring and make sure it will go past 3000'. TOOH.
8. Plug 1. Pictured Cliffs perforations: PU and TIH with 4-1/2" CR and set near 3000'. Pressure test tubing to 1000 psi. Sting out and pressure test casing to 600 psi. Sting back into CR and attempt to squeeze below CR with 10 sx. TOOH.
9. MIRU logging truck. Roll hole. Run CBL log from CR to surface. Hold 600 psi on casing if possible. Electronic copy of CBL to be sent to; Monica Kuehling, NMOCD mkuehling@state.nm.us, Kenneth Renneck, BLM krenneck@blm.gov, Scott Lindsay, DJR slindsay@djrlc.com, and Loren Diede, DJR ldiede@djrlc.com.

10. Plug 2. Pictured Cliffs, Fruitland, and Kirtland tops: Spot blind plug from CR sufficient to cover required formation tops, as indicated by CBL. Squeeze holes and a CR may be required to cover Kirtland top in annulus. Pump water to ensure that tubing is clear. TOOH.
11. Plug 3: Ojo Alamo: Perforate holes at 2804'. Set CR near 2754'. Mix and pump sufficient volume to bring TOC to 1840', inside and outside. Pump water to ensure that tubing is clear. TOOH.
12. Plug 4. Nacimiento: Perforate holes at 1940'. PU and TIH with 4-1/2" CR. Set CR near 1890'. Mix and pump sufficient volume to bring TOC to 1840', inside and outside. Pump water to ensure tubing is clear. TOOH.
13. Plug 5. Surface casing shoe, surface plug: Perforate holes at 150'. Tie on to 4 1/2" casing and mix and pump sufficient volume to bring cement to surface, inside and outside.
14. RD cementing equipment. Cut off wellhead, fill any exposed annulus with cement, as necessary. **Install surface P&A marker as per BIA requirements.** Record GPS coordinates for P&A marker and the Final P&A Report. Photograph the P&A marker and attach to the report.
15. RD and MO all rig and cement equipment. Assure that location is free of trash and contamination before moving off.
16. Send all reports and attachments to DJR Aztec office for regulatory filings.

Note: All cement is to be Class G mixed at 15.8 ppg, yield 1.15 cu ft / sx. Cement volumes are based on inside capacities + 50' excess and outside capacities + 100% excess.

Surface PxA marker it to be installed at surface, 12"x18", and exposed at the reclaimed GL surface.

Current Wellbore Diagram
DJR Operating, LLC
Jicarilla F 160 1Y
API # 30-039-05066
SW/NE, Unit G, Sec 13, T23N, R2W
Rio Arriba County, NM

GL 7349'
 KB 7354'
 Spud Date 2/9/1963

SURF CSG

Hole size 12.25"
 Csg Size: 8.625"
 Wt: 24#
 Grade: J-55
 ID: 8.097"
 Depth 100'
 cap cf/ft: 0.3575
 TOC: Surface

FORMATION TOPS

(as reported)
 San Jose Surf
 Nacimiento 1890'
 Ojo Alamo 2754'
 Kirtland 2900'
 Fruitland 2960'
 Pictured Cliffs 3035'


PROD TBG DETAIL

1-1/4" tubing landed at
 3032'

PROD CSG

Hole size 6.75"
 Csg Size: 4.5"
 Wt: 9.5"
 Grade: N/A
 ID: 4.090"
 Depth 3148'
 cap cf/ft: 0.0912
 Csg/Csg Ann, cf/ft: 0.2318
 Csg/OH Ann, cf/ft: 0.2278
 TOC: (Calc.) 2891'

TOC 2891'
 Perfs 3038-74'
 TD/PBTD 3150'

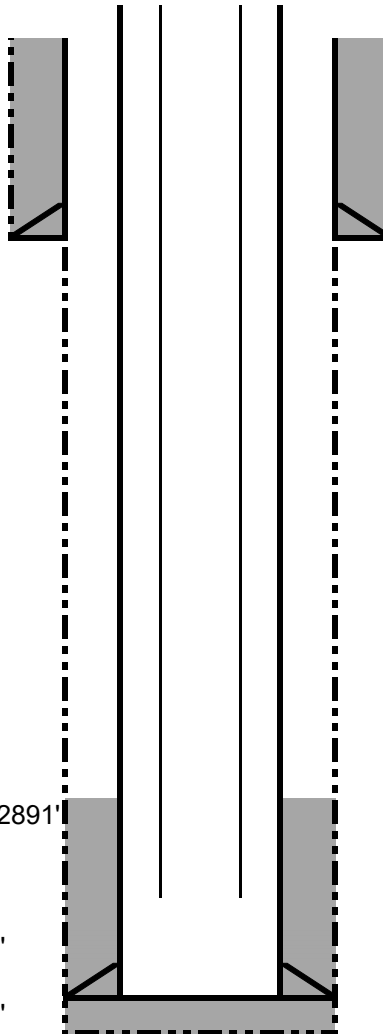

Proposed Wellbore Diagram
DJR Operating, LLC
Jicarilla F 160 1Y
API # 30-039-05066
SW/NE, Unit G, Sec 13, T23N, R2W
Rio Arriba County, NM

GL 7349'
 KB 7354'
 Spud Date 2/9/1963

SURF CSG


Hole size 12.25"
 Csg Size: 8.625"
 Wt: 24#
 Grade: J-55
 ID: 8.097"
 Depth 100'
 cap cf/ft: 0.3575
 TOC: Surface

FORMATION TOPS

San Jose	Surf
Nacimiento	1890'
Ojo Alamo	2754'
Kirtland	2900'
Fruitland	2960'
Pictured Cliffs	3035'

PROD CSG

Hole size 6.75"
 Csg Size: 4.5"
 Wt: 9.5"
 Grade: N/A
 ID: 4.090"
 Depth 3148'
 cap cf/ft: 0.0912
 Csg/Csg Ann, cf/ft: 0.2318
 Csg/OH Ann, cf/ft: 0.2278
 TOC: (Calc.) 2891'

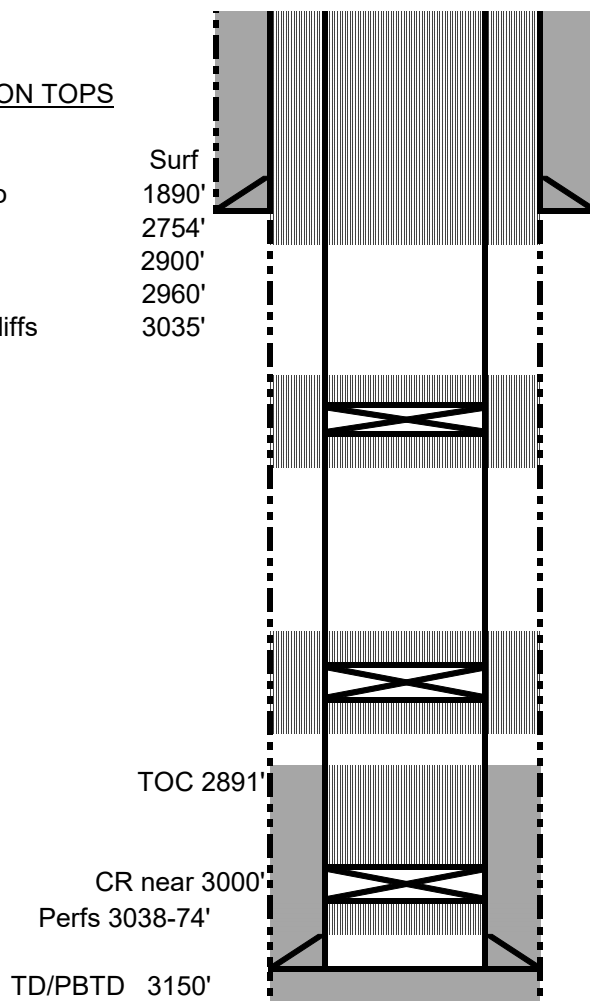

Plug 5: Surface shoe and surface plug: Perf holes at 150'. Tie onto 4-1/2" casing and mix and pump sufficient volume to bring cement to surface, inside and outside.

Plug 4: Nacimiento: Perf holes at 1940'. Set CR near 1890'. Mix and pump sufficient volume to bring TOC to 1840', inside and outside.

Plug 3: Ojo Alamo top: Perf holes at 2804'. Set CR near 2754'. Mix and pump sufficient volume to bring TOC to 2704' inside and outside.

Plug 2: Pictured Cliffs, Fruitland, and Kirtland tops: Spot blind plug from CR to TOC or as indicated by CBL. Squeeze holes and a CR may be required to cover Kirtland top in annulus.

Plug 1: Pictured Cliffs perfs: Set CR near 3000'. Sqz below CR with 10 sx. Run CBL.

**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
FARMINGTON DISTRICT OFFICE
6251 COLLEGE BLVD.
FARMINGTON, NEW MEXICO 87402**

AFMSS 2 Sundry ID 2676768

Attachment to notice of Intention to Abandon

Well: Jicarilla F 160 1Y

CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
2. Farmington Office is to be notified at least 24 hours before the plugging operations commence (505) 564-7750.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

Office Hours: 7:45 a.m. to 4:30 p.m.

K. Rennick 6/27/2022

**GENERAL REQUIREMENTS FOR
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES
FARMINGTON FIELD OFFICE**

- 1.0 The approved plugging plans may contain variances from the following minimum general requirements.
- 1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.
 - 1.2 Requirements may be added to address specific well conditions.
- 2.0 Materials used must be accurately measured. (densometer/scales)
- 3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.
- 3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.
- 4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.
- 4.1 The cement shall be as specified in the approved plugging plan.
 - 4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
 - 4.3 Surface plugs may be no less than 50' in length.
 - 4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
 - 4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.
 - 4.6 **A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.**

5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.
- 5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.
- 5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.
- 5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

- 6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.
- 6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H₂S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), five copies, with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.

BLM FLUID MINERALS P&A Geologic Report

Date Completed: 06/27/2022

Well No. Jicarilla F 160 1Y (API# 30-039-05066)	Location:	SWNE				
Lease No. JIC160	Sec. 13	T23N			R2W	
Operator DJR Operating, LLC	County	Rio Arriba		State	New Mexico	
Total Depth 3150'	PBTD 3150'	Formation Pictured Cliffs				
Elevation (GL) 7349'		Elevation (KB) 7354'				

Geologic Formations	Est. Top	Est. Bottom	Log Top	Log Bottom	Remarks
San Jose Fm					Surface/freshwater sands
Nacimiento Fm			1890		Possible freshwater sands
Ojo Alamo Ss			2754		Aquifer (possible freshwater)
Kirtland Shale			2900		
Fruitland Fm			2960		Coal/Gas/Possible water
Pictured Cliffs Ss			3035		Gas
Lewis Shale					
Chacra					Gas
Cliff House					Water/Possible gas
Menefee Fm					Coal/Ss/Water/Possible O&G
Point Lookout Ss					Probable water/Possible O&G
Mancos					Water/Possible gas
Gallup					O&G/Water
Greenhorn					
Graneros Shale					
Dakota Ss					O&G/Water

Remarks:

P & A

Reference Well:

- Picture Cliffs perforations 3038 – 3074'

Prepared by: Kenneth Rennick

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 120899

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 120899
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
kpickford	CBL required	7/6/2022
kpickford	Notify NMOCD 24 Hours Prior to beginning operations	7/6/2022
kpickford	Adhere to BLM approved COAs and plugs. See GEO report.	7/6/2022