

Well Name: JICARILLA APACHE B	Well Location: T24N / R5W / SEC 20 / SENW /	County or Parish/State: RIO ARRIBA / NM
Well Number: 1	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name: JICARILLA APACHE
Lease Number: JIC11	Unit or CA Name:	Unit or CA Number:
US Well Number: 3003960024	Well Status: Abandoned	Operator: DJR OPERATING LLC

Subsequent Report

Sundry ID: 2683513

Type of Submission: Subsequent Report

Date Sundry Submitted: 07/22/2022

Date Operation Actually Began: 07/13/2022

Type of Action: Plug and Abandonment

Time Sundry Submitted: 10:56

Actual Procedure: The subject well was Plugged & Abandoned on 07/18/2022 per the attached End of Well Report, As Plugged Wellbore Diagram, and Marker.

SR Attachments

Actual Procedure

EOW\_BLM\_Submittal\_20220722105633.pdf

Well Name: JICARILLA APACHE B	Well Location: T24N / R5W / SEC 20 / SENW /	County or Parish/State: RIO ARRIBA / NM
Well Number: 1	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name: JICARILLA APACHE
Lease Number: JIC11	Unit or CA Name:	Unit or CA Number:
US Well Number: 3003960024	Well Status: Abandoned	Operator: DJR OPERATING LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHAW-MARIE FORD	Signed on: JUL 22, 2022 10:56 AM
Name: DJR OPERATING LLC	
Title: Regulatory Specialist	
Street Address: 1 Road 3263	
City: Aztec	State: NM
Phone: (505) 632-3476	
Email address: sford@djrlc.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5055647742	BLM POC Email Address: krennick@blm.gov
Disposition: Accepted	Disposition Date: 07/26/2022
Signature: Kenneth Rennick	

**DJR Operating, LLC  
P&A End of Well Report  
Jicarilla Apache B 1  
API # 30-039-60024  
SE/NW, Unit F, Sec 20, T24N, R5W  
Rio Arriba County, NM  
Spud Date: 3-18-1955  
Plug Date: 7-18-2022**

7-13-2022:

MIRU rig and equipment. SITP = 80, SICP = 160, BH = 0. NDWH, NU BOP. Pull 2 3/8" tubing.

7-14-2022:

RIH with 7 5/8" gauge ring to 2168'. RIH, set 7 5/8" WL-set cement retainer at 2168'. Load and roll the hole. Pressure test casing, good test.

P&A Plug 1: Pictured Cliffs perforations and open hole section. TIH, sting into CR, mix and pump 25 sx through CR. TOOH.

RIH and run CBL log from 2168' to surface. POOH.

TIH with 2 3/8" workstring to 2168'.

P&A Plug 2: Pictured Cliffs, Fruitland, Kirtland and Ojo Alamo formation tops: Mix and pump balanced plug of 148 sx from 2168' to 1525'. Pull up to 1083'.

P&A Plug 3: Nacimiento formation top: Mix and pump balanced plug of 40 sx from 1083' to 909'.

7-18-2022:

P&A Plug 4: Surface casing shoe to surface. Perforate holes at 245'. Mix and pump plug of 122 sx down casing and out BH. Good cement returns out BH.

Cut off WH. TOC in casing and annulus at surface. Install P&A marker. Top off cellar with 30 sx.

Release rig.

All cement used: Class G cement mixed at 15.8 ppg, yield 1.15ft<sup>3</sup>/sk.

Regulatory Representative: Jimmie Dobson, BLM and Monica Kuehling, NMOCD via phone

GPS Coordinates: Lat; 36.301111 N, Long; 107.38778 W

DJR Operating, LLC  
P&A Marker  
Jicarilla Apache B 1  
API # 30-039-60024  
SE/NW, Unit F, Sec 20, T24N, R5W  
Rio Arriba County, NM  
Spud Date: 3-18-1955  
Plug Date: 7-18-2022





# United States Department of the Interior

BUREAU OF INDIAN AFFAIRS

Jicarilla Agency

P.O. Box 167

Dulce, New Mexico 87528

IN REPLY REFER TO:

Branch of Real Estate Services

November 15, 2019

## Memorandum

To: Robert Switzer, Environmental Protection Specialist  
Bureau of Land Management, Farmington Field Office

From: Kurt Sandoval, Realty Officer  
Bureau of Indian Affairs, Jicarilla Agency

Subject: BIA Concurrence concerning Well Pad Monument Makers

Let this serve as concurrence for the agreed upon preferred method to be used when constructing well pad monument markers on Jicarilla Apache Tribal Lands. We will eliminate the 6 ft. dry hole marker and use a permanent metal plate that will be installed at ground level, effective September 2019. The marker will contain the following information:

- Well Pad Lease Number
- Well Pad Location Name and Number
- Well Pad Legal Description, specifically Section, Township and Range
- Well Pad API Number
- Well Pad Plug Date
- Well Pad Operator Name

You may contact our office if you have any questions or concerns at (575) 759-3936. Thank you.

  
Realty Officer

cc: Jicarilla Oil and Gas Administration

12" x 18" MINIMUM



**DJR Operating, LLC**  
**End of Well Report**  
**Jicarilla Apache B 1**  
 API # 30-039-60024  
 SE/NW, Unit F, Sec 20, T24N, R5W  
 Rio Arriba County, NM

GL 6543'  
 KB 6552'  
 Spud Date 3/18/1955

SURF CSG

Hole size 15"  
 Csg Size: 10.75"  
 Wt: 32.7#  
 Grade: N/A  
 ID: 10.192"  
 Depth 195'  
 casing cap ft<sup>3</sup>/ft: 0.5969  
 TOC: N/A


FORMATION TOPS

San Jose	Surface
Nacimiento	1012'
Ojo Alamo	1625'
Kirtland	1834'
Fruitland	1955'
Pictured Cliffs	2181'

PROD CSG

Hole size 9.875"  
 Csg Size: 7.625"  
 Wt: 26.4#  
 Grade: N/A  
 ID: 6.969"  
 Depth 2110'  
 Casing cap ft<sup>3</sup>/ft: 0.2648  
 Csg/csg Ann. ft3/ft 0.2495  
 Csg/OH ft3/ft 0.2148  
 TOC: 1060' (TS)

Open Hole Pictured Cliffs  
 2184-2231' TD

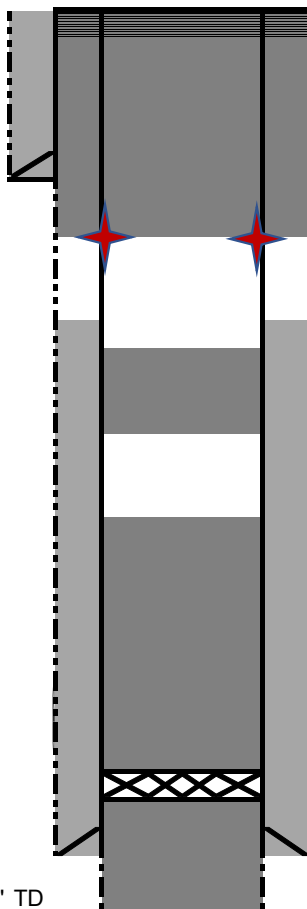

7-18-2022: Cut off WH, install P&A marker.  
 Top off cellar with 30 sx.

7-18-2022: Plug 4: Surface casing and surface plug: Perf holes at 245'. Mix and pump plug of 122 sx down casing and out BH. Good cement returns out BH.

7-14-2022: Plug 3: Nacimiento: Approval to run inside plug based on CBL log. Mix and spot balanced plug of 40 sx from 1083' to 909'.

7-14-2022: Plug 2: Fruitland, Kirtland, Ojo Alamo: Mix and spot balanced plug of 148 sx from 2168' to 1525'. Spot plug on top of CR from 2168-1575'.

7-14-2022: Run CBL from 2168' to surface.

7-14-2022: Plug 1: Pictured Cliffs: Set WL-set CR at 2168'. Load and roll hole. PT casing, good test. Mix and pump plug of 25 sx through CR into perms. TOOH.  
 7.625" casing set at 2184'

6-3/4" OH

All cement used was Class G, mixed at 15.8 ppg, yield 1.15 cu ft/sx  
 Regulatory representatives: Jimmie Dobson, BLM and Monica Kuehling, NMOCD via phone  
 GPS Coordinates; Lat. 36.301111 N, Long. 107.38778 W

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS

Action 128994

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 128994
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	well plugged 7/18/22	10/7/2022