Received by OFP: 2/23/2023 2:51:45 PM Office	State of New Mexico	Form C-103 Revised July 18, 2013		
<u>District I</u> – (575) 393-6161 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> – (575) 748-1283 811 S. First St., Artesia, NM 88210 <u>District III</u> – (505) 334-6178 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> – (505) 476-3460 1220 S. St. Francis Dr., Santa Fe, NM	Energy, Minerals and Natural Resources OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505	Revised July 18, 2013         WELL API NO.         30-025-28334         5. Indicate Type of Lease         STATE         FEE         6. State Oil & Gas Lease No.		
(DO NOT USE THIS FORM FOR PROPOSALS DIFFERENT RESERVOIR. USE "APPLICATIC PROPOSALS.)	AND REPORTS ON WELLS TO DRILL OR TO DEEPEN OR PLUG BACK TO A ON FOR PERMIT" (FORM C-101) FOR SUCH Well  Other	19552         7. Lease Name or Unit Agreement Name         South Hobbs G/SA Unit         8. Well Number 130		
2. Name of Operator Occidental Permian LTD.		9. OGRID Number 157984		
3. Address of Operator P.O. Box 4294, Houston, TX 77210		10. Pool name or Wildcat Hobbs; Grayburg - San Andres		
4. Well Location Unit Letter F : 14	103 feet from the NORTH line and	1403 feet from the WEST line		
Section 10	Township 19S Range 38E	NMPM County LEA		
	. Elevation (Show whether DR, RKB, RT, GR, etc 7' GL	.)		
12. Check Appr	opriate Box to Indicate Nature of Notice,	Report or Other Data		

NOTICE OF INTENTION TO:				SUBSEQUENT REF	PORT OF:		
PERFORM REMEDIAL WORK		PLUG AND ABANDON	~	REMEDIAL	WORK 🗌 .	ALTERING CASING	
TEMPORARILY ABANDON		CHANGE PLANS		COMMENC	E DRILLING OPNS.	P AND A	
PULL OR ALTER CASING		MULTIPLE COMPL		CASING/CE			
DOWNHOLE COMMINGLE					Notify OCD 24 hrs. pri	or to any work	
CLOSED-LOOP SYSTEM OTHER:				OTHER:	done	· ·	

Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.


Please see well-bore diagrams and planned procedure attached.

Spud Date:		Rig Release Date	2:	
	***SEE ATTACHED COA's***	Ν	MUST BE PLUGGED BY 7/1/24	
I hereby certif	y that the information above is true and	complete to the bes	t of my knowledge and belief.	
SIGNATURE	Roni Mathew		tory Advisor	09/23/2023
Type or print For State Use	name Roni Mathew	E-mail address:	roni_mathew@oxy.com	_ PHONE: 713.215.7827
APPROVED Conditions of	BY:Approval (if any):	TITLE	Staff Manager	_DATE10/6/23

## Job Plan:

- 1. MIRU.
- 2. PU workstring, RIH & tag CIBP TOC @ 3988'. Report to NMOCD.
- 3. [SA/Grayburg Plug] Spot 25 sx Class C cmt on top CIBP @ 3988' to 3888' or greater.
- 4. WOC 4 hrs. Tag TOC. Report to NMOCD.
- 5. Circulate hole w/ 10.0 ppg plugging mud
- 6. [DV Tool Plug] Spot 25 sx Class C cmt on top CIBP @ 3424' to 3324' or greater.
- 7. WOC 4 hrs. Tag TOC. Report to NMOCD.
- 8. [Yates Plug] Perf @ 2715' & Sqz 100 sx Class C cmt. Displace cmt to 2615'.
- 9. WOC 4 hrs. Tag TOC. Report to NMOCD.
- 10. [Shoe/Salt Plug] Perf @ 1545' & Sqz 150 sx Class C cmt. Displace cmt to 1425'.
- 11. WOC 4 hrs. Tag TOC. Report to NMOCD.
- 12. [Surface Plug] Perf @ 400'. Circulate 250 sx Class C cmt f/ 400' to surface.
- 13. Ensure cement is to surface on all casing strings.
- 14. RDMO.
- 15. Cutoff WH & install marker, 4" diameter & 4' tall.
- 16. Remove anchors and debris.

# **Current WBD**

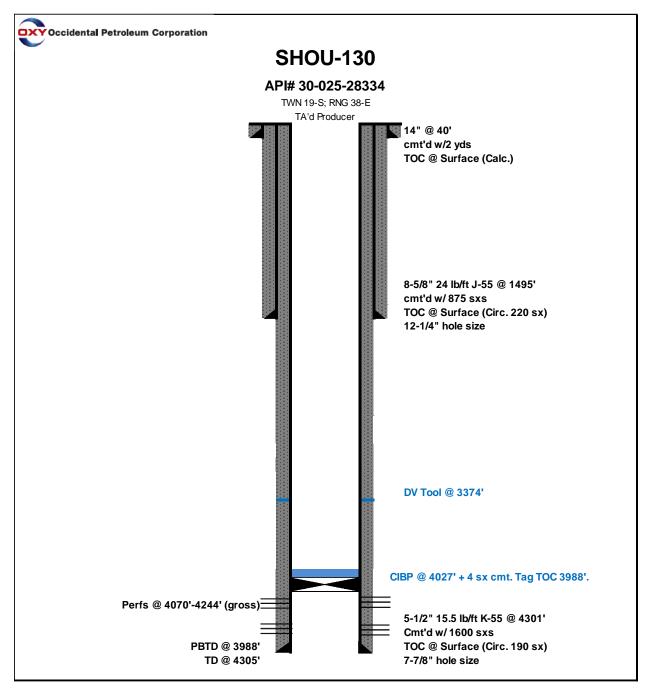

•

# **Proposed WBD**

Occidental Petroleum Corporation		
	SHOU-130	
	AP# 30-025-28334	
	TWN 19-S; RNG 38-E	
Curfeee Dhur	P&A'd Producer	14" @ 40'
<u>Surface Plug</u> Perf+Circ. @ 400' w/ 250 sx Class C.		cmt'd w/2 yds
Fill all casing to surf.		TOC @ Surface (Calc.)
		8-5/8" 24 lb/ft J-55 @ 1495'
<u>Shoe/Salt Plug</u> Perf+Sqz @ 1545' w/ 100 sx Class C.		cmt'd w/ 875 sxs TOC @ Surface (Circ. 220 sx)
Displace cmt to 1425'		12-1/4" hole size
WOC 4 hours & tag.		
Veteo Diur		
<u>Yates Plug</u> Perf+Sqz @ 2715' w/ 100 sx Class C.		
Displace cmt to 2615'		
WOC 4 hours & tag.		
DV Tool Plug Spot 25 sx Class C Cmt f/ 3424'-3334' or greater.		DV Tool @ 3374'
WOC 4 hours & tag.		DV 1001 @ 3374
SA/Grayburg Plug		
Tag CIBP+cmt @ 3988'		
Spot 25 sx Class C Cmt f/ 3988'-3888' or greater.		Circulate w/ plugging mud
WOC 4 hours & tag		CIBP @ 4027' + 4 sx cmt. Tag TOC 3988'.
Perfs @ 4070'-4244' (gross	s)	
		5-1/2" 15.5 lb/ft K-55 @ 4301'
		Cmt'd w/ 1600 sxs
PBTD @ ( TD @ 430)		TOC @ Surface (Circ. 190 sx) 7-7/8" hole size
	J	

# CONDITIONS FOR PLUGGING AND ABANDONMENT

# OCD - Southern District

The following is a guide or checklist in preparation of a plugging program, this is not all inclusive and care must be exercised in establishing special plugging programs in unique and unusual cases, Notify NMOCD at 575-626-0830 at least 24 hours before beginning work. After MIRU rig will remain on well until it is plugged to surface. OCD is to be notified before rig down. Company representative will be on location during plugging procedures.

- 1. A notice of intent to plug and abandon a wellbore is required to be approved before plugging operations are conducted. A cement evaluation tool is required in order to ensure isolation of producing formations, protection of water and correlative rights. A cement bond log or other accepted cement evaluation tool is to be provided to the division for evaluation if one has not been previously run or if the well did not have cement circulated to surface during the original casing cementing job or subsequent cementing jobs. Insure all bradenheads have been exposed, identified and valves are operational prior to rig up.
- 2. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to a permitted disposal location.
- 3. Trucking companies being used to haul oilfield waste fluids to a disposal commercial or private shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator as well as the contractor, to verify that this permit is in place prior to performing work. Drivers shall be able to produce a copy upon request of an NMOCD Field inspector.
- 4. Filing a subsequent C-103 will serve as notification that the well has been plugged.
- 5. A final C-103 shall be filed (and a site inspection by NMOCD Inspector to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to Meet NMOCD standards) before bonding can be released.
- 6. If work has not begun within 1 Year of the approval of this procedure, an extension request must be file stating the reason the well has not been plugged.
- 7. Squeeze pressures are not to exceed 500 psi, unless approval is given by NMOCD.
- 8. Produced water will not be used during any part of the plugging operation.
- 9. Mud laden fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
- 10. All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
- 11. Class 'C' cement will be used above 7500 feet.
- 12. Class 'H' cement will be used below 7500 feet.
- 13. A cement plug is required to be set 50' above and 50' below, casing stubs, DV tools, attempted casing cut offs, cement tops outside casing, salt sections and anywhere the casing is perforated, these plugs require a 4 hour WOC and then will be tagged
- 14. All Casing Shoes Will Be Perforated 50' below shoe depth and Attempted to be Squeezed, cement needs to be 50' above and 50' Below Casing Shoe inside the Production Casing.

- 16. When setting the top out cement plug in production, intermediate and surface casing, wellbores should remain full at least 30 minutes after plugs are set
- 17. A CIBP is to be set within 100' of production perforations, capped with 100' of cement, WOC 4 hours and tag.
- 18. A CIBP with 35' of cement may be used in lieu of the 100' plug if set with a bailer. This plug will be placed within 100' of the top perforation, (WOC 4 hrs and tag).
- 19. No more than 3000' is allowed between cement plugs in cased hole and 2000' in open hole.
- 20. Some of the Formations to be isolated with cement plugs are: These plugs to be set to isolate formation tops
  - A) Fusselman
  - B) Devonian
  - C) Morrow
  - D) Wolfcamp
  - E) Bone Springs
  - F) Delaware
  - G) Any salt sections
  - H) Abo
  - I) Glorieta
  - J) Yates.
  - K) Cherry Canyon Eddy County
  - L) Potash----(In the R-111-P Area (Page 3 & 4), a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, WOC 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.
- 21. If cement does not exist behind casing strings at recommended formation depths, the casing can be cut and pulled with plugs set at recommended depths. If casing is not pulled, perforations will be shot and cement squeezed behind casing, WOC and tagged. These plugs will be set 50' below formation bottom to 50' above formation top inside the casing

## DRY HOLE MARKER REQUIRMENTS

The operator shall mark the exact location of the plugged and abandoned well with a steel marker not less than four inches in diameter, 3' below ground level with a plate of at least ¼" welded to the top of the casing and the dry hole marker welded on the plate with the following information welded on the dry hole marker:

1. Operator name2. Lease and Well Number3. API Number4. Unit Letter5. QuarterSection (feet from the North, South, East or West)6. Section, Township and Range7. Plugging Date8. County(SPECIAL CASES)------AGRICULTURE OR PRARIE CHICKEN BREEDING AREAS

In these areas, a below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to NMOCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to NMOCD (We typically require a current survey to verify the GPS)

## SITE REMEDIATION DUE WITHIN ONE YEAR OF WELL PLUGGING COMPLETION

# R-111-P Area

#### T 18S – R 30E

Sec 10 Unit P. Sec 11 Unit M,N. Sec 13 Unit L,M,N. Sec 14 Unit C -P. Sec 15 Unit A G,H,I,J,K,N,O,P. Sec 22 Unit All except for M. Sec 23, Sec 24 Unit C,D,E,L, Sec 26 Unit A-G, Sec 27 Unit A,B,C

#### T 19S – R 29E

Sec 11 Unit P. Sec 12 Unit H-P. Sec 13. Sec 14 Unit A,B,F-P. Sec 15 Unit P. Sec 22 Unit A,B,C,F,G,H,I,J K,N,O,P. Sec 23. Sec 24. Sec 25 Unit D. Sec 26 Unit A- F. Sec 27 Unit A,B,C,F,G,H.

#### T 19S – R 30E

Sec 2 Unit K,L,M,N. Sec 3 Unit I,L,M,N,O,P. Sec 4 Unit C,D,E,F,G,I-P. Sec 5 Unit A,B,C,E-P. Sec 6 Unit I,O,P. Sec 7 – Sec 10. Sec 11 Unit D, G—P. Sec 12 Unit A,B,E-P. Sec 13 Unit A-O. Sec 14-Sec 18. Sec 19 Unit A-L, P. Sec 20 – Sec 23. Sec 24 Unit C,D,E,F,L,M,N. Sec 25 Unit D. Sec 26 Unit A-G, I-P. Sec 27, Sec 28, Sec 29 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 32 Unit A,B,G,H,I,J,N,O,P. Sec 33. Sec 34. Sec 35. Sec 36 Unit D,E,F,I-P.

#### T 19S – R 31E

Sec 7 Unit C,D,E,F,L. Sec 18 Unit C,D,E,F,G,K,L. Sec 31 Unit M. Sec 34 Unit P. Sec 35 Unit M,N,O. Sec 36 Unit O,P.

#### T 20S – R 29E

Sec 1 Unit H,I,P. Sec 13 Unit E,L,M,N. Sec 14 Unit B-P. Sec 15 Unit A,H,I,J,N,O,P. Sec 22 Unit A,B,C,F,G,H,I,J,O,P. Sec 23. Sec 24 Unit C,D,E,F,G,J-P. Sec 25 Unit A-O. Sec 26. Sec 27 Unit A,B,G,H,I,J,O,P. Sec 34 Unit A,B,G,H. Sec 35 Unit A-H. Sec 36 Unit B-G.

#### T 20S – R 30E

Sec 1 – Sec 4. Sec 5 Unit A,B,C,E-P. Sec 6 Unit E,G-P. Sec 7 Unit A-H,I,J,O,P. Sec 8 – 17. Sec 18 Unit A,B,G,H,I,J,O,P. Sec 19 Unit A,B,G,H,I,J,O,P. Sec 20 – 29. Sec 30 Unit A-L,N,O,P. Sec 31 Unit A,B,G,H,I,P. Sec 32 – Sec 36.

#### T 20S – R 31E

Sec 1 Unit A,B,C,E-P. Sec 2. Sec 3 Unit A,B,G,H,I,J,O,P. Sec 6 Unit D,E,F,J-P. Sec 7. Sec 8 Unit E-P. Sec 9 Unit E,F,J-P. Sec 10 Unit A,B,G-P. Sec 11 – Sec 36.

#### T 21S – R 29E

Sec 1 – Sec 3. Sec 4 Unit L1 – L16,I,J,K,O,P. Sec 5 Unit L1. Sec 10 Unit A,B,H,P. Sec 11 – Sec 14. Sec 15 Unit A,H,I. Sec 23 Unit A,B. Sec 24 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 25 Unit A,O,P. Sec 35 Unit G,H,I,J,K,N,O,P. Sec 36 A,B,C,F – P.

#### T 21S – R 30E

Sec 1 – Sec 36

#### T 21S – R 31E

Sec 1 – Sec 36

### T 22S – R 28E

Sec 36 Unit A,H,I,P.

# T 22S – R 29E

Sec 1. Sec2. Sec 3 Unit I,J,N,O,P. Sec 9 Unit G – P. Sec 10 – Sec 16. Sec 19 Unit H,I,J. Sec 20 – Sec 28. Sec 29 Unit A,B,C,D,G,H,I,J,O,P. Sec 30 Unit A. Section 31 Unit C – P. Sec 32 – Sec 36

# T 22S – R 30E

Sec 1 – Sec 36

# T 22S – R 31E

Sec 1 – Sec 11. Sec 12 Unit B,C,D,E,F,L. Sec 13 Unit E,F,K,L,M,N. Sec 14 – Sec 23. Sec 24 Unit C,D,E,F,K,L,M,N. Sec 25 Unit A,B,C,D. Sec 26 Unit A,B,C,D,G,H. Sec 27 – Sec 34.

# T 23S – R 28E

Sec 1 Unit A

# T 23S – R 29E

Sec 1 – Sec 5. Sec 6 Unit A – I, N,O,P. Sec 7 Unit A,B,C,G,H,I,P. Sec 8 Unit A – L, N,O,P. Sec 9 – Sec 16. Sec 17 Unit A,B,G,H,I,P. Sec 21 – Sec 23. Sec 24 Unit A – N. Sec 25 Unit D,E,L. Sec 26. Sec 27. Sec 28 Unit A – J, N,O,P. Sec 33 Unit A,B,C. Sec 34 Unit A,B,C,D,F,G,H. Sec 35. Sec 36 Unit B,C,D,E,F,G,K,L.

#### T 23S – R 30E

Sec 1 – Sec 18. Sec 19 Unit A – I,N,O,P. Sec 20, Sec 21. Sec 22 Unit A – N, P. Sec 23, Sec 24, Sec 25. Sec 26 Unit A,B,F-P. Sec 27 Unit C,D,E,I,N,O,P. Sec 28 Unit A – H, K,L,M,N. Sec 29 Unit A – J, O,P. Sec 30 Unit A,B. Sec 32 A,B. Sec 33 Unit C,D,H,I,O,P. Sec 34, Sec 35, Sec 36.

### T 23S – R 31E

Sec 2 Unit D,E,J,O. Sec 3 – Sec 7. Sec 8 Unit A – G, K – N. Sec 9 Unit A,B,C,D. Sec 10 Unit D,P. Sec 11 Unit G,H,I,J,M,N,O,P. Sec 12 Unit E,L,K,M,N. Sec 13 Unit C,D,E,F,G,J,K,L,M,N,O. Sec 14. Sec 15 Unit A,B,E – P. Sec 16 Unit I, K – P. Sec 17 Unit B,C,D,E, I – P. Sec 18 – Sec 23. Sec 24 Unit B – G, K,L,M,N. Sec 25 Unit B – G, J,K,L. Sec 26 – Sec 34. Sec 35 Unit C,D,E.

### T 24S – R 29E

Sec 2 Unit A, B, C, D. Sec 3 Unit A

### T 24S – R 30E

Sec 1 Unit A – H, J – N. Sec 2, Sec 3. Sec 4 Unit A,B,F – K, M,N,O,P. Sec 9 Unit A – L. Sec 10 Unit A – L, O,P. Sec 11. Sec 12 Unit D,E,L. Sec 14 Unit B – G. Sec 15 Unit A,B,G,H.

### T 24S – R 31E

Sec 3 Unit B – G, J – O. Sec 4. Sec 5 Unit A – L, P. Sec 6 Unit A – L. Sec 9 Unit A – J, O,P. Sec 10 Unit B – G, K – N. Sec 35 Unit E – P. Sec 36 Unit E,K,L,M,N.

### T 25S – R 31E

Sec 1 Unit C,D,E,F. Sec 2 Unit A – H.

District I 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 District IV

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3470 Fax: (505) 476-3462

**State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. Santa Fe, NM 87505

COMMENTS

Operator:	OGRID:
OCCIDENTAL PERMIAN LTD	157984
P.O. Box 4294	Action Number:
Houston, TX 772104294	268342
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)
COMMENTS	

#### Created By Comment Comment Date DATA ENTRY PM. 10/10/2023 plmartinez

Page 9 of 10

.

Action 268342

District I 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV 1220 S. St Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3470 Fax: (505) 476-3462

**State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Operator:	OGRID:
OCCIDENTAL PERMIAN LTD	157984
P.O. Box 4294	Action Number:
Houston, TX 772104294	268342
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

#### CONDITIONS

Created By		Condition Date
gcordero	None	10/6/2023

CONDITIONS

Page 10 of 10

.

Action 268342