

U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Well Name: JUNIPER COM 17	Well Location: T24N / R10W / SEC 17 / SWSE / 36.3077363 / -107.9156537	County or Parish/State: SAN JUAN / NM
Well Number: 34	Type of Well: OTHER	Allottee or Tribe Name:
Lease Number: NMNM101058	Unit or CA Name:	Unit or CA Number: NMNM108207
US Well Number: 300453186200S1	Well Status: Temporarily Abandoned	Operator: DUGAN PRODUCTION CORPORATION

Notice of Intent

Sundry ID: 2758430

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 10/27/2023

Time Sundry Submitted: 09:09

Date proposed operation will begin: 12/26/2023

Procedure Description: Dugan Production plans to plug and abandon the well per the following procedure: 1) Run 5½" casing scraper to 1169'. RIH & set 5½" CIBP @ 1169'. Fruitland Coal perforations @ 1219'-1233'. Load hole. Pressure test casing to 600 psi for 30 mins. 2) Spot inside Plug I above CIBP @ 1169' w/38 sks (43.7 cu ft) Class G neat cement to 850' to cover the Fruitland top (5 gal/sk, 15.8 #/gal, 1.15 cu.ft/sk). Plug I, inside 5½" casing, 850'-1169', Fruitland, 38 sks, 43.7 cu ft. 3) Spot inside plug from 592' w/32 sks, 36.8 cu ft Class G neat cement to 332' to cover the Kirtland-Ojo Alamo tops. Plug II, inside 5½" casing, 32 sks, 36.8 cu ft, Kirtland-Ojo Alamo, 332'-592'. 4) Perforate @ 179'. This is to satisfy new NMOCD COA to shoot 50' below the surface casing shoe, even if cement is circulated or TOC is at surface from CBL. Run 2-3/8" tubing to 179'. Attempt to establish a rate and bring circulation to surface through BH. Spot Inside/Outside Plug III from 179' w/88 sks Class G neat cement (101.2 cu ft) to cover the surface casing shoe. Plug III, inside/outside 5½" casing, 0-179', Surface, 88 sks, 101.2 cu ft. 5) Cut wellhead off. Fill casing w/cement incase needed. Install dry hole marker. 6) Clean location. Rig down and move.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Juniper_Com_17_34_Reclamation_Plan_20231027085857.pdf

Juniper_Com_17_34_PA_formation_tops_20231027085653.pdf

Well Name: JUNIPER COM 17

Well Location: T24N / R10W / SEC 17 / SWSE / 36.3077363 / -107.9156537

County or Parish/State: SAN JUAN / NM

Well Number: 34

Type of Well: OTHER

Allottee or Tribe Name:

Lease Number: NMNM101058

Unit or CA Name:

Unit or CA Number: NMNM108207

US Well Number: 300453186200S1

Well Status: Temporarily Abandoned

Operator: DUGAN PRODUCTION CORPORATION

Juniper_Com_17_34_PA_planned_wellbore_schematic_20231027085548.pdf

Juniper_Com_17_34_PA_current_wellbore_schematic_20231027085530.pdf

Juniper_Com_17_34_PA_procedure_20231027085428.pdf

Conditions of Approval

Specialist Review

24N10W17_J_W_Com_17_34_Geo_KR_20231027095558.pdf

General_Requirement_PxA_20231027095222.pdf

2758430_NOIA_17_34_3004531862_KR_10272023_20231027095207.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: TYRA FEIL

Signed on: OCT 27, 2023 09:01 AM

Name: DUGAN PRODUCTION CORPORATION

Title: Authorized Representative

Street Address: PO Box 420

City: Farmington State: NM

Phone: (505) 325-1821

Email address: tyrafeil@duganproduction.com

Field

Representative Name: Aliph Reena

Street Address: PO Box 420

City: Farmington State: NM Zip: 87499-0420

Phone: (505)360-9192

Email address: Aliph.Reena@duganproduction.com

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5055647742

BLM POC Email Address: krennick@blm.gov

Disposition: Approved

Disposition Date: 10/27/2023

Signature: Kenneth Rennick

Planned P & A Procedure


Juniper Com 17 #34
30-045-31862
Basin Fruitland
660' FSL & 1900' FEL
S17 T24N R10W
San Juan County, NM

Dugan Production plans to plug and abandon the well per the following procedure:

- Run 5½" casing scraper to 1169'. RIH & set 5½" CIBP @ 1169'. Fruitland Coal perforations @ 1219'-1233'. Load hole. Pressure test casing to 600 psi for 30 mins.
- Spot inside Plug I above CIBP @ 1169' w/38 sks (43.7 cu ft) Class G neat cement to 850' to cover the Fruitland top (5 gal/sk, 15.8 #/gal, 1.15 cu.ft/sk). **Plug I, inside 5½" casing, 850'-1169', Fruitland, 38 sks, 43.7 cu ft.**
- Spot inside plug from 592' w/32 sks, 36.8 cu ft Class G neat cement to 332' to cover the Kirtland-Ojo Alamo tops. **Plug II, inside 5½" casing, 32 sks, 36.8 cu ft, Kirtland-Ojo Alamo, 332'-592'.**
- Perforate @ 179'. This is to satisfy new NMOCD COA to shoot 50' below the surface casing shoe, even if cement is circulated or TOC is at surface from CBL. Run 2-3/8" tubing to 179'. Attempt to establish a rate and bring circulation to surface through BH. Spot Inside/Outside Plug III from 179' w/88 sks Class G neat cement (101.2 cu ft) to cover the surface casing shoe. **Plug III, inside/outside 5½" casing, 0-179', Surface, 88 sks, 101.2 cu ft.**
- Cut wellhead off. Fill casing w/cement in case needed. Install dry hole marker.
- Clean location. Rig down and move.

Current Wellbore Schematic

Juniper Com 17 # 34
30-045-31862
Basin Fruitland
660' FSL & 1900' FEL
S17 T24N R10W
San Juan County, NM

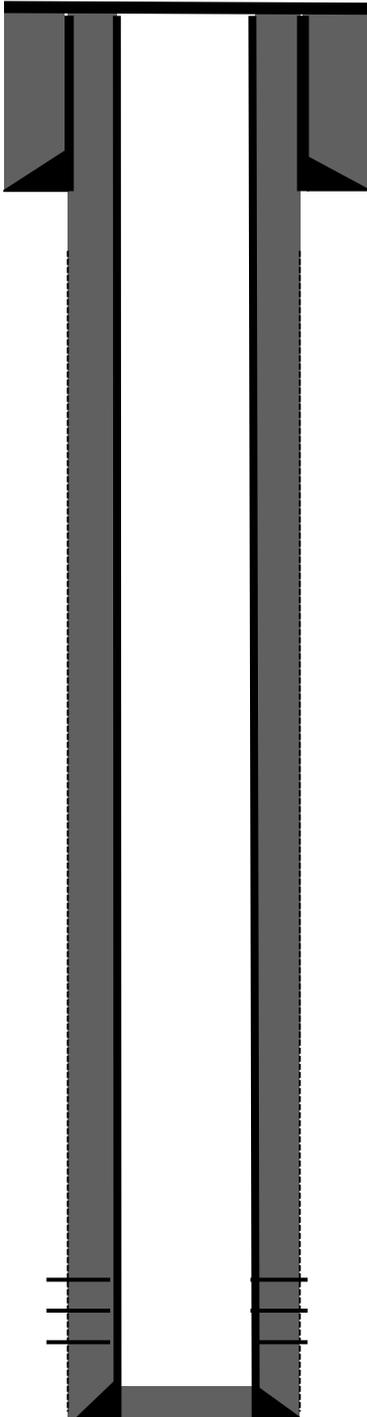

8-5/8" 24# casing @ 129'. Cemented with 85 sks Class B cement.
Hole size: 12-1/4". Circulate 7 bbls cement to surface.

5 1/2" 15.5# casing @ 1369'. Hole size: 7-7/8"


Cemented production casing w/ 140 sks Class G followed by 90 sks 50/50
poz. Circulated 10 bbls cement to surface.

Fruitland Coal Perforated @ 1219'-1233'

PBTD @ 1327', TD 1378'

Planned Wellbore Schematic

Juniper Com 17 # 34
30-045-31862
Basin Fruitland
660' FSL & 1900' FEL
S17 T24N R10W
San Juan County, NM

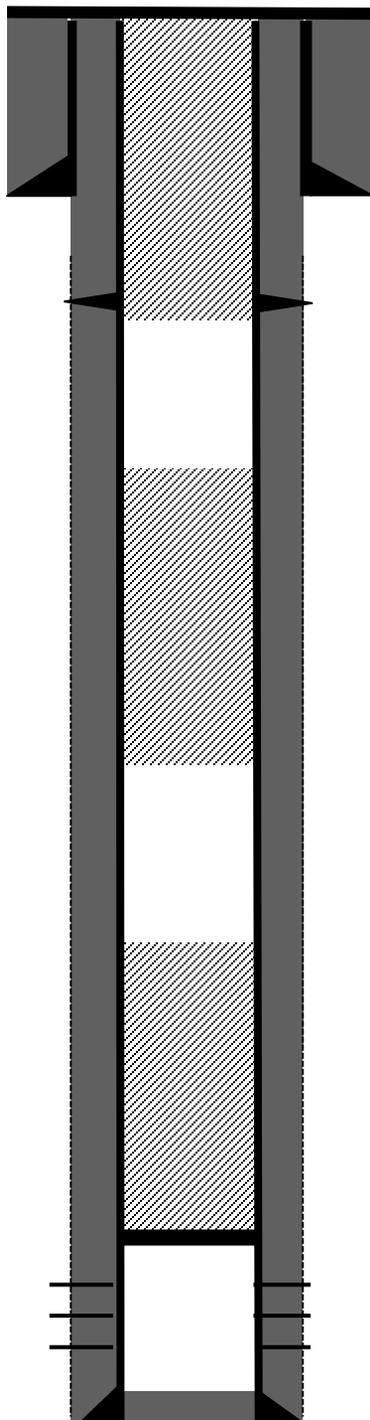

8-5/8" 24# casing @ 129'. Cemented with 85 sks Class B cement.
Hole size: 12-1/4". Circulate 7 bbls cement to surface.

**Perforate @ 179'. Plug III, inside/outside 5 1/2" casing, 0-179',
Surface, 88 sks, 101.2 Cu.ft**

**Plug II, Inside 5 1/2' casing, 32 sks, 36.8 Cu.ft, Kirtland-Ojo
Alamo, 332'-592'**

5 1/2" 15.5# casing @ 1369'. Hole size: 7-7/8"

Cemented production casing w/ 140 sks Class G followed by 90 sks 50/50
poz. Circulated 10 bbls cement to surface.

**Set CIBP @1169'. Fruitland perforations @ 1219'-1233'.
Plug I, Inside 5 1/2" casing, 850'-1169', Fruitland, 38 sks, 43.7
Cu.ft.**

Fruitland Coal Perforated @ 1219-1233

PBTD @ 1327, TD 1378

Juniper Com 17 # 34
30-045-31862
Basin Fruitland
660' FSL & 1900' FEL
S17 T24N R10W
San Juan County, NM

Formation Tops

- **Nacimiento - Surface**
- **Ojo Alamo - 432**
- **Kirtland - 542**
- **Fruitland - 950**
- **Pictured Cliff - 1242**

**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
FARMINGTON DISTRICT OFFICE
6251 COLLEGE BLVD.
FARMINGTON, NEW MEXICO 87402**

AFMSS 2 Sundry ID 2758430

Attachment to notice of Intention to Abandon

Well: Juniper Com 17 34

CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
2. Farmington Office is to be notified at least 24 hours before the plugging operations commence at (505) 564-7750.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

Office Hours: 7:45 a.m. to 4:30 p.m.

K. Rennick 10/27/2023

**GENERAL REQUIREMENTS FOR
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES
FARMINGTON FIELD OFFICE**

- 1.0 The approved plugging plans may contain variances from the following minimum general requirements.
- 1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.
 - 1.2 Requirements may be added to address specific well conditions.
- 2.0 Materials used must be accurately measured. (densometer/scales)
- 3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.
- 3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.
- 4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.
- 4.1 The cement shall be as specified in the approved plugging plan.
 - 4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
 - 4.3 Surface plugs may be no less than 50' in length.
 - 4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
 - 4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.
 - 4.6 **A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.**

5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.
- 5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.
- 5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.
- 5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

- 6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.
- 6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H₂S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), through the Automated Fluid Minerals Support System (AFMSS) with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.

**BLM FLUID MINERALS
P&A Geologic Report**

Date Completed: 10/27/2023

Well No. Juniper Com 17 #34 (API 30-045-31862)	Location	SWSE			
Lease No. NMNM101058	Sec. 17	T24N		R10W	
Operator Dugan Production Corporation	County	San Juan	State	New Mexico	
Total Depth 1378' (TD)	1327' (PB)	Formation	Fruitland Coal		
Elevation (GL) 6677'					

Geologic Formations	Est. Top	Est. Bottom	Log Top	Log Bottom	Remarks
San Jose Fm					Surface/freshwater sands
Nacimiento Fm					Possible freshwater sands
Ojo Alamo Ss	432				Aquifer (possible freshwater)
Kirtland Shale	542				
Fruitland Fm	950				Coal/Gas/Possible water
Pictured Cliffs Ss	1242				Gas
Lewis Shale					
Chacra					Gas
Cliff House Ss					Water/Possible gas
Menefee Fm					Coal/Ss/Water/Possible O&G
Point Lookout Ss					Probable water/Possible O&G
Mancos Shale					
Gallup					O&G/Water
Greenhorn					
Graneros Shale					
Dakota Ss					O&G/Water

Remarks:
P & A

Reference Well:

- Limited raster log data. The proposed plugging procedure is appropriate to cover all the formations. Estimated formation tops are appropriate for the area.

Prepared by: Kenneth Rennick

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 280247

CONDITIONS

Operator: DUGAN PRODUCTION CORP PO Box 420 Farmington, NM 87499	OGRID: 6515
	Action Number: 280247
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	Notify NMOCD 24 hours prior to moving on.	10/27/2023