

1625 N. French Dr., Hobbs, NM 88240

State of New Mexico
Energy, Minerals & Natural ResourcesForm C-104
Revised August 1, 2011District I

811 S. First St., Artesia, NM 88210

District II

1000 Rio Brazos Rd., Aztec, NM 87410

District III

1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT**I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT**

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date: NW - 05/24/2023
⁴ API Number 30 – 015-48281	⁵ Pool Name CEDAR CANYON; BONE SPRING	⁶ Pool Code 11520
⁷ Property Code: 321633	⁸ Property Name: OXBOW CC 17-8 FEDERAL COM	⁹ Well Number: 2H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
N	17	24S	29E		255	SOUTH	1727	WEST	EDDY

¹¹ Bottom Hole Location

FTP- 183' FSL 506' FWL LTP- 185' FNL 494' FWL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	8	24S	29E		50	NORTH	495	WEST	EDDY
¹² Lse Code F	¹³ Producing Method Code : F		¹⁴ Gas Connection Date: 6/1/23		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
214754	LPC CRUDE OIL, INC.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 01/03/23	²² Ready Date 05/24/2023	²³ TD 18532'M 7689'V	²⁴ PBSD 18487'M 7689'V	²⁵ Perforations 15922-18397'	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	³⁰ Sacks Cement
14-3/4"		10-3/4"		525'	480
9-7/8"		7-5/8"		7023'	2130
6-3/4"		5-1/2"		18512'	1224

V. Well Test Data

³¹ Date New Oil 6/1/23	³² Gas Delivery Date 6/1/23	³³ Test Date 6/20/23	³⁴ Test Length 24 HRS	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 824
³⁷ Choke Size 128/128	³⁸ Oil 557	³⁹ Water 1114	⁴⁰ Gas 1261		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.



Signature:

Printed name: JANA MENDIOLA

Title: SR. REGULATORY ANALYST

E-mail Address:

Janalyn_mendiola@oxy.com

Date:

07/23/2023

Phone:

432-695-5036

OIL CONSERVATION DIVISION

Approved by: Sarah McGrath

Title: Petroleum Specialist - A

Approval Date: 01/19/2024

File 3160-4 within 10 days of BLM Approval.

1625 N. French Dr., Hobbs, NM 88240

State of New Mexico
Energy, Minerals & Natural ResourcesForm C-104
Revised August 1, 2011District I

811 S. First St., Artesia, NM 88210

District II

1000 Rio Brazos Rd., Aztec, NM 87410

District III

1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT**I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT**

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date: NW - 05/24/2023
⁴ API Number 30 - 015-48281	⁵ Pool Name PIERCE CROSSING; BONE SPRING, EAST	⁶ Pool Code 96473
⁷ Property Code: 321633	⁸ Property Name: OXBOW CC 17-8 FEDERAL COM	⁹ Well Number: 2H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
N	17	24S	29E		255	SOUTH	1727	WEST	EDDY

¹¹ Bottom Hole Location

FTP- 183' FSL 506' FWL LTP- 185' FNL 494' FWL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	8	24S	29E		50	NORTH	495	WEST	EDDY
¹² Lse Code F	¹³ Producing Method Code : F		¹⁴ Gas Connection Date: 6/1/23		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
214754	LPC CRUDE OIL, INC.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 01/03/23	²² Ready Date 05/24/2023	²³ TD 18532'M 7689'V	²⁴ PBSD 18487'M 7689'V	²⁵ Perforations 13276-15899'	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	³⁰ Sacks Cement
14-3/4"		10-3/4"		525'	480
9-7/8"		7-5/8"		7023'	2130
6-3/4"		5-1/2"		18512'	1224

V. Well Test Data

³¹ Date New Oil 6/1/23	³² Gas Delivery Date 6/1/23	³³ Test Date 6/20/23	³⁴ Test Length 24 HRS	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 824
³⁷ Choke Size 128/128	³⁸ Oil 557	³⁹ Water 1114	⁴⁰ Gas 1261		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature: 

Printed name: JANA MENDIOLA

Title: SR. REGULATORY ANALYST

E-mail Address:
Janalyn_mendiola@oxy.comDate: 07/23/2023
Phone: 422-695-5036

OIL CONSERVATION DIVISION

Approved by: Sarah McGrath

Title: Petroleum Specialist - A

Approval Date: 01/19/2024

File 3160-4 within 10 days of BLM Approval.

1625 N. French Dr., Hobbs, NM 88240

State of New Mexico
Energy, Minerals & Natural ResourcesForm C-104
Revised August 1, 2011District I

811 S. First St., Artesia, NM 88210

District II

1000 Rio Brazos Rd., Aztec, NM 87410

District III

1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT**I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT**

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date: NW - 05/24/2023
⁴ API Number 30 – 015-48281	⁵ Pool Name PIERCE CROSSING; BONE SPRING	⁶ Pool Code 50371
⁷ Property Code: 321633	⁸ Property Name: OXBOW CC 17-8 FEDERAL COM	⁹ Well Number: 2H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
N	17	24S	29E		255	SOUTH	1727	WEST	EDDY

¹¹ Bottom Hole Location

FTP- 183' FSL 506' FWL LTP- 185' FNL 494' FWL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	8	24S	29E		50	NORTH	495	WEST	EDDY
¹² Lse Code F	¹³ Producing Method Code : F		¹⁴ Gas Connection Date: 6/1/23		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
214754	LPC CRUDE OIL, INC.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 01/03/23	²² Ready Date 05/24/2023	²³ TD 18532'M 7689'V	²⁴ PBDT 18487'M 7689'V	²⁵ Perforations 8131-13253'	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	³⁰ Sacks Cement
14-3/4"		10-3/4"		525'	480
9-7/8"		7-5/8"		7023'	2130
6-3/4"		5-1/2"		18512'	1224

V. Well Test Data

³¹ Date New Oil 6/1/23	³² Gas Delivery Date 6/1/23	³³ Test Date 6/20/23	³⁴ Test Length 24 HRS	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 824
³⁷ Choke Size 128/128	³⁸ Oil 557	³⁹ Water 1114	⁴⁰ Gas 1261		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.



Signature:

Printed name: JANA MENDIOLA

Title: SR. REGULATORY ANALYST

E-mail Address:

Janalyn_mendiola@oxy.com

Date:

07/23/2023

Phone:

432-695-5936

OIL CONSERVATION DIVISION

Approved by: Sarah McGrath

Title: Petroleum Specialist - A

Approval Date: 01/19/2024

File 3160-4 within 10 days of BLM Approval.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102 Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-015-48281	² Pool Code 11520,	³ Pool Name CEDAR CANYON, BS.
⁴ Property Code 321633	⁵ Property Name OXBOW CC 17_8 FEDERAL COM	
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC.	⁶ Well Number 2H
		⁹ Elevation 2936'


¹⁰ Surface Location

UL or lot no. N	Section 17	Township 24S	Range 29E	Lot Idn	Feet from the 255	North/South line South	Feet from the 1727	East/West line West	County EDDY
--------------------	---------------	-----------------	--------------	---------	----------------------	---------------------------	-----------------------	------------------------	----------------

¹¹ Bottom Hole Location If Different From Surface

UL or lot no. D	Section 8	Township 24S	Range 29E	Lot Idn	Feet from the 50	North/South line North	Feet from the 495	East/West line West	County EDDY
¹² Dedicated Acres 160		¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No.			

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

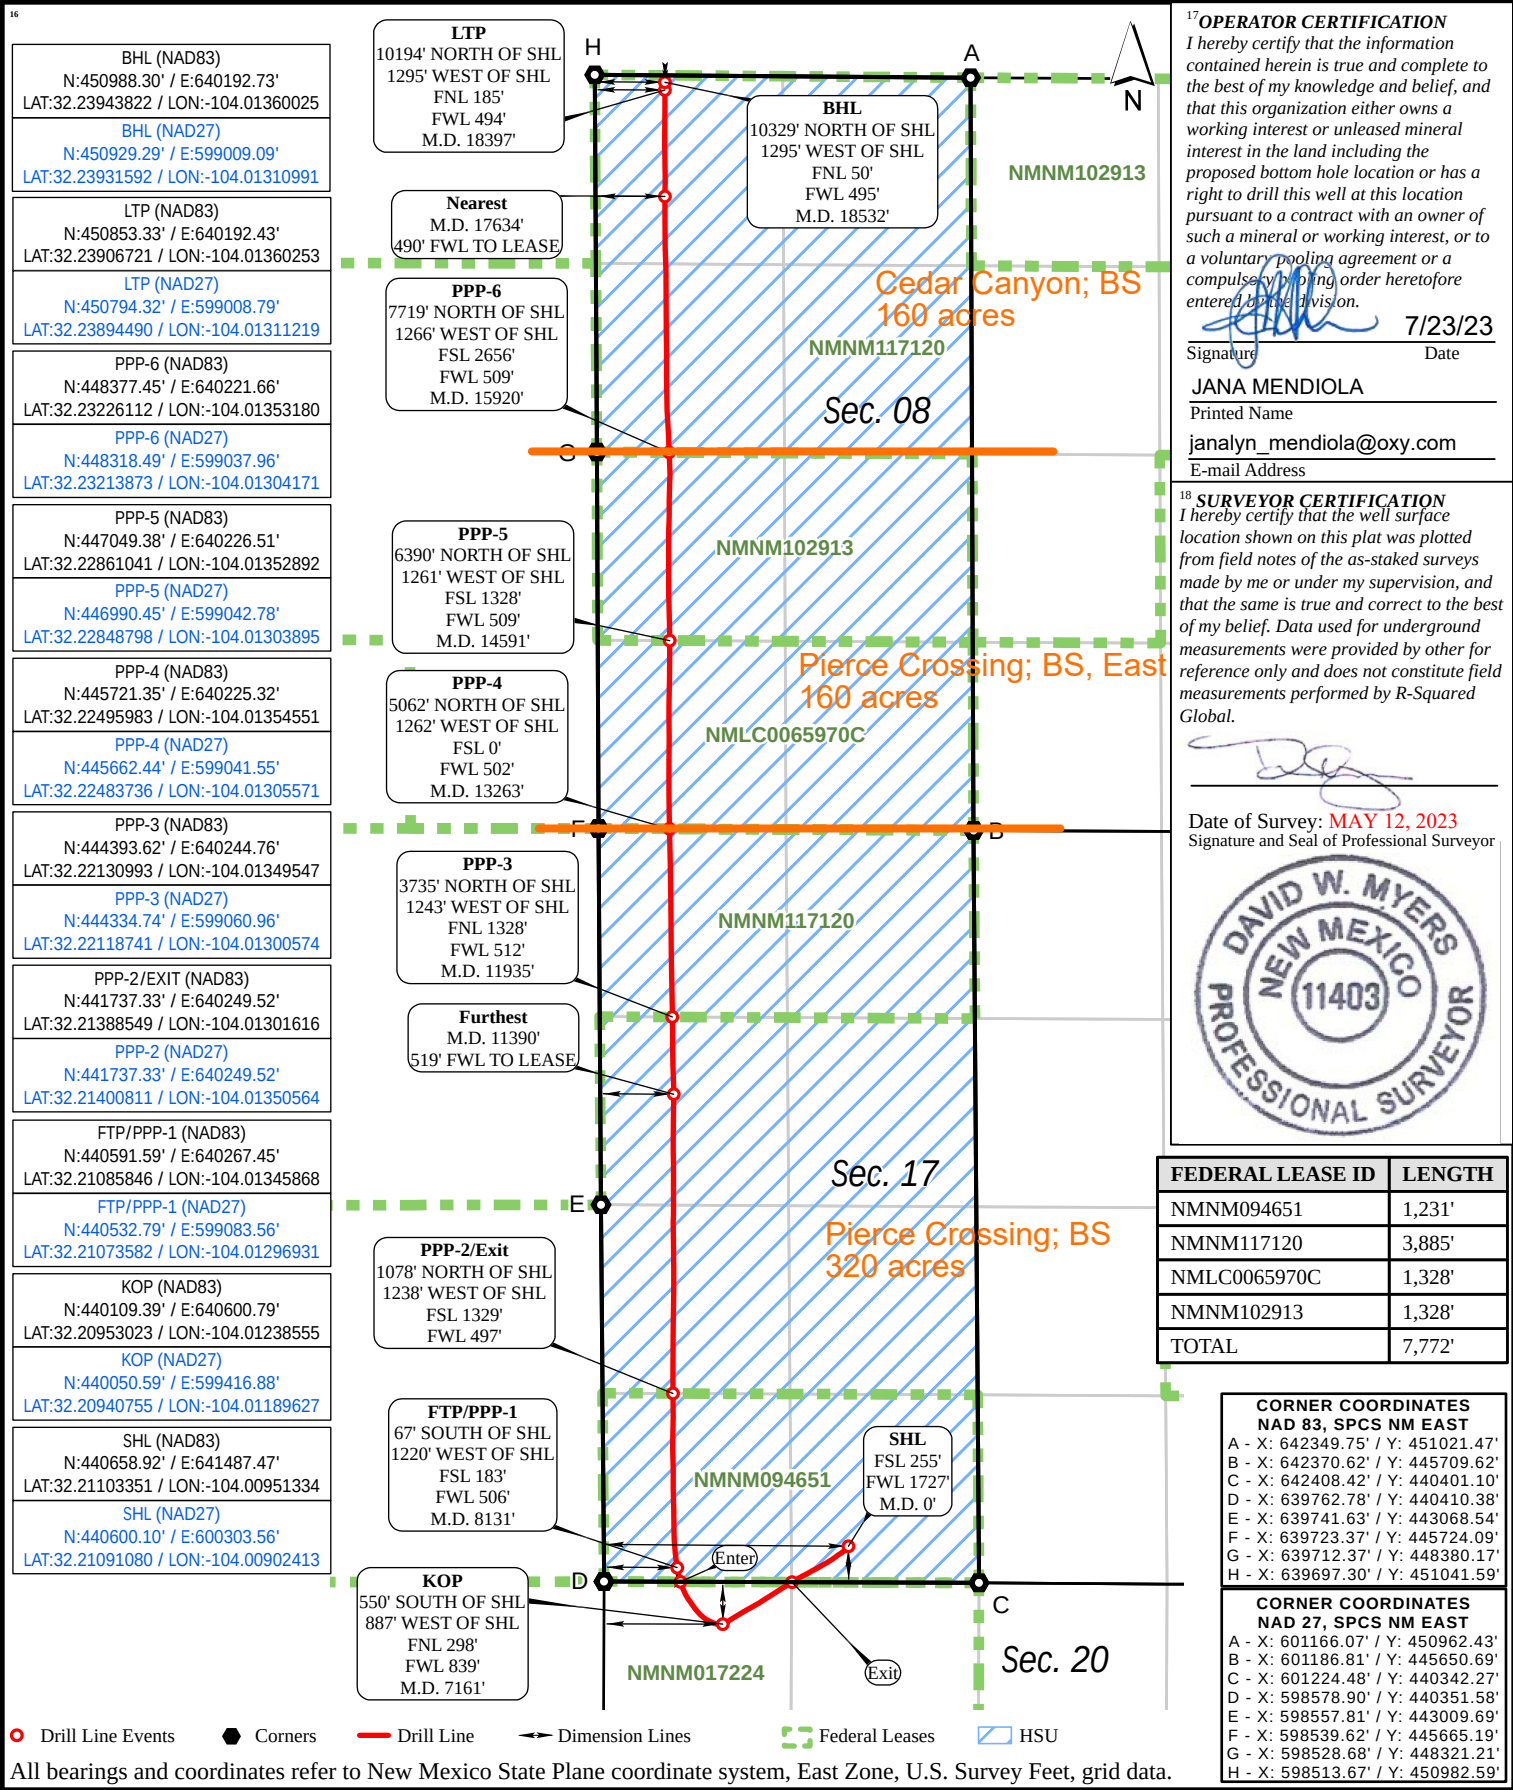

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102 Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-015-48281	² Pool Code 50371	³ Pool Name PIERCE CROSSING, BS
⁴ Property Code 321633	⁵ Property Name OXBOW CC 17_8 FEDERAL COM	⁶ Well Number 2H
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC.	⁹ Elevation 2936'


¹⁰ Surface Location

UL or lot no. N	Section 17	Township 24S	Range 29E	Lot Idn	Feet from the 255	North/South line South	Feet from the 1727	East/West line West	County EDDY
--------------------	---------------	-----------------	--------------	---------	----------------------	---------------------------	-----------------------	------------------------	----------------

¹¹ Bottom Hole Location If Different From Surface

UL or lot no. D	Section 8	Township 24S	Range 29E	Lot Idn	Feet from the 50	North/South line North	Feet from the 495	East/West line West	County EDDY
¹² Dedicated Acres 320	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

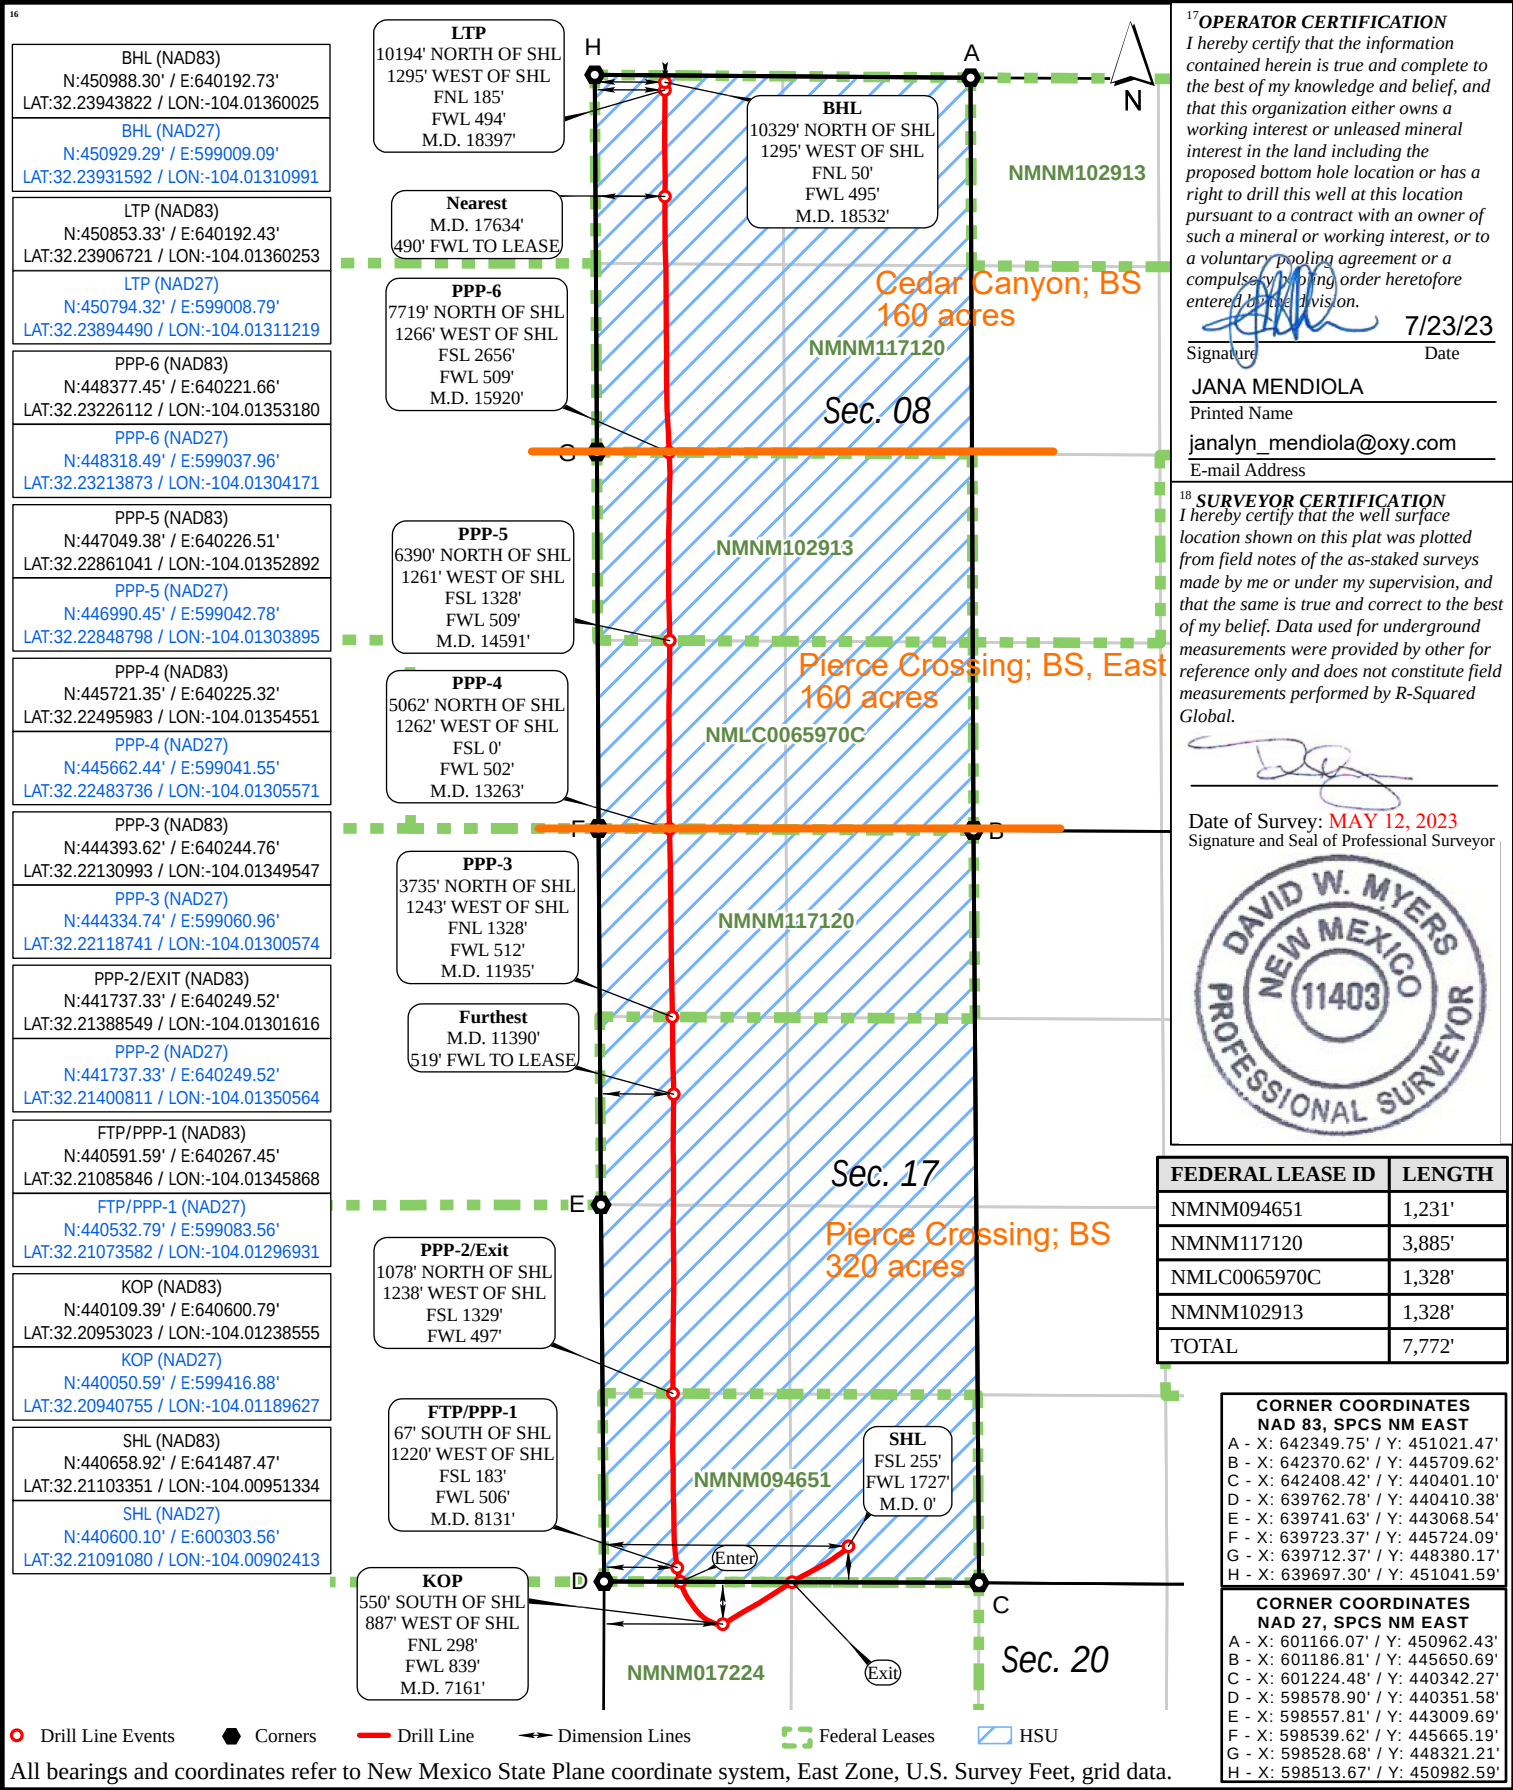

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102 Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-015-48281	² Pool Code 96473	³ Pool Name PIERCE CROSSING, BS, EAST
⁴ Property Code 321633	⁵ Property Name OXBOW CC 17_8 FEDERAL COM	⁶ Well Number 2H
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC.	⁹ Elevation 2936'


¹⁰ Surface Location

UL or lot no. N	Section 17	Township 24S	Range 29E	Lot Idn	Feet from the 255	North/South line South	Feet from the 1727	East/West line West	County EDDY
--------------------	---------------	-----------------	--------------	---------	----------------------	---------------------------	-----------------------	------------------------	----------------

¹¹ Bottom Hole Location If Different From Surface

UL or lot no. D	Section 8	Township 24S	Range 29E	Lot Idn	Feet from the 50	North/South line North	Feet from the 495	East/West line West	County EDDY
¹² Dedicated Acres 160	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

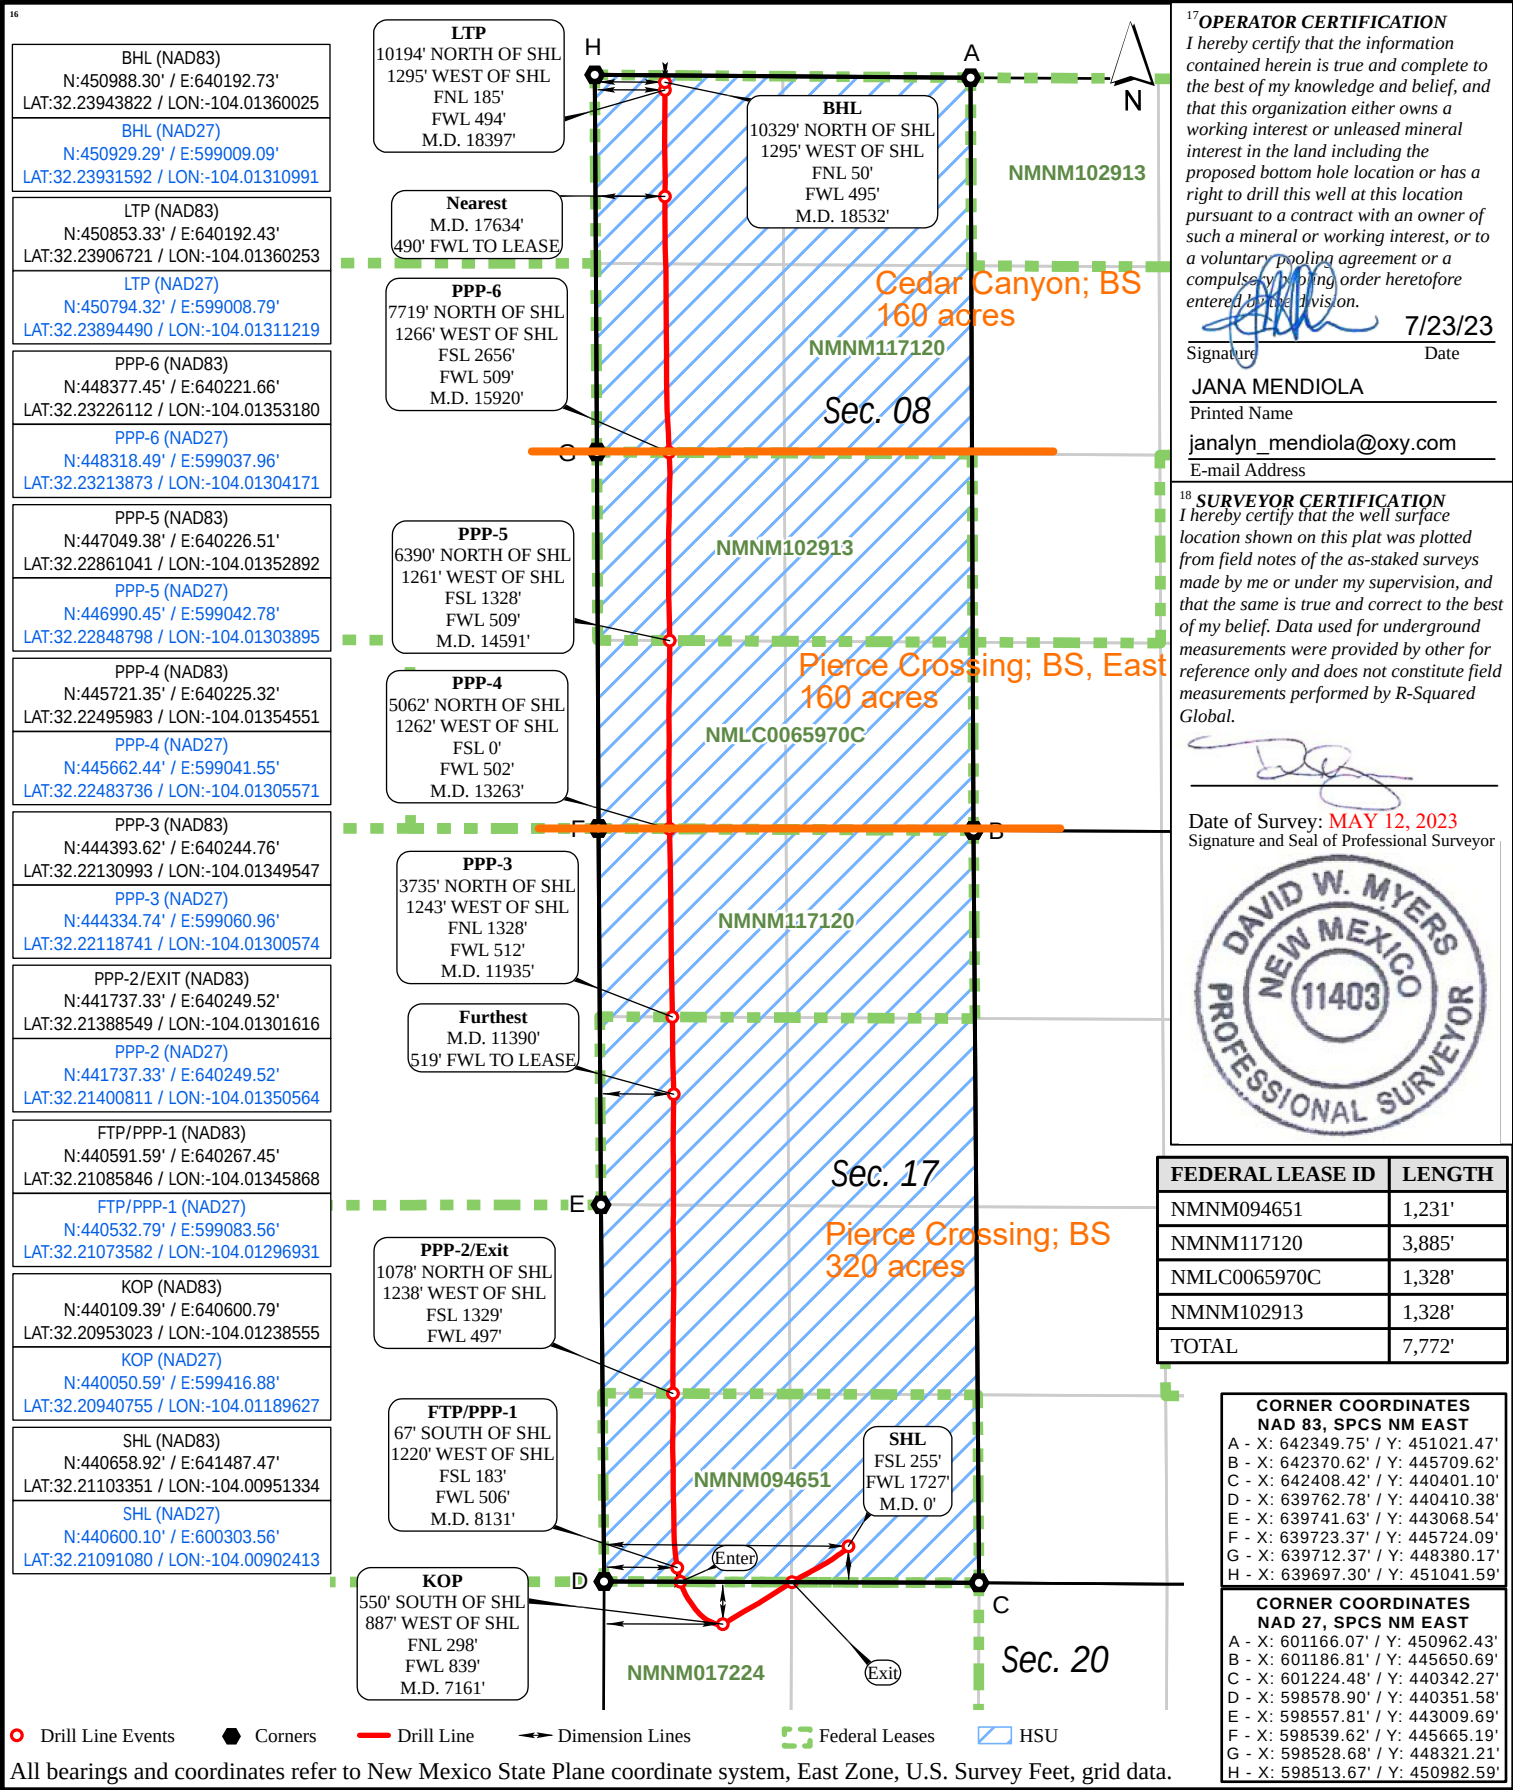

All bearings and coordinates refer to New Mexico State Plane coordinate system, East Zone, U.S. Survey Feet, grid data.

Distances/areas relative to NAD 83 Combined Scale Factor: 0.99978031 Convergence Angle: 0.174192554°




OXY



Borehole:				Well:				Field:				Structure:							
Oxbow CC 17-8 Federal Com 2H				Oxbow CC 17-8 Federal Com 2H				NM Eddy County (NAD 83)				Oxy Oxbow CC 17-8 Federal Com Pad 215							
Gravity & Magnetic Parameters								Surface Location				NAD83 New Mexico State Plane, Eastern Zone, US Feet				Miscellaneous			
Model: IFR1		Dip: 59.905°		Date: 28-Feb-2023		Gravity FS: 998.468mgn (9.80665 Based)		Lat: N 32 12 39.72		Northing: 4046658.92RUS		Grid Conv: 0.1726*		Slat: 2H		TVD Ref: H&P 373, RKB = 26R (2962.2ft above MSL)			
MagDec: 6.741°		FS: 47483.9nT						Lon: W 104 0 34.25		Easting: 641487.47RUS		Scale Fact: 0.99992058		Plan: Oxy Oxbow CC 17-8 Federal Com 2H Gyro+Corrected MWD to 18532ft					

Critical Points								
Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)/S(-)	E(+)/W(-)	DLS
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
SHL	26.00	0.00	0.00	26.00	0.00	0.00	0.00	0.00
First Gyro Survey	64.03	0.17	310.70	64.03	0.04	0.04	-0.04	0.45
Last Gyro Survey	512.00	0.34	93.96	511.97	-1.32	-0.85	3.86	0.67
First SLB Survey	565.00	0.39	127.28	564.97	-1.48	-0.97	4.16	0.41
Actual KOP	7161.00	13.36	246.86	7011.04	-436.08	-549.53	-886.68	4.62
1st Bone Springs Intersection	7749.10	51.43	325.75	7509.20	-254.38	-394.77	-1114.85	11.51
FTP / 100ft FSL Cross	8044.00	73.77	350.21	7638.51	-1.31	-151.32	-1207.92	9.26
Section 17-8 Line Cross	13263.00	88.68	358.80	7679.61	5179.49	5062.53	-1262.24	0.13
LTP / 100ft FNL Cross	18477.00	90.84	0.08	7689.98	10356.50	10275.24	-1295.02	2.08
Final Survey	18504.00	91.39	0.21	7689.46	10383.28	10302.23	-1294.95	2.08
Projection to Total Depth	18532.00	91.39	0.21	7688.78	10411.05	10330.22	-1294.85	0.00

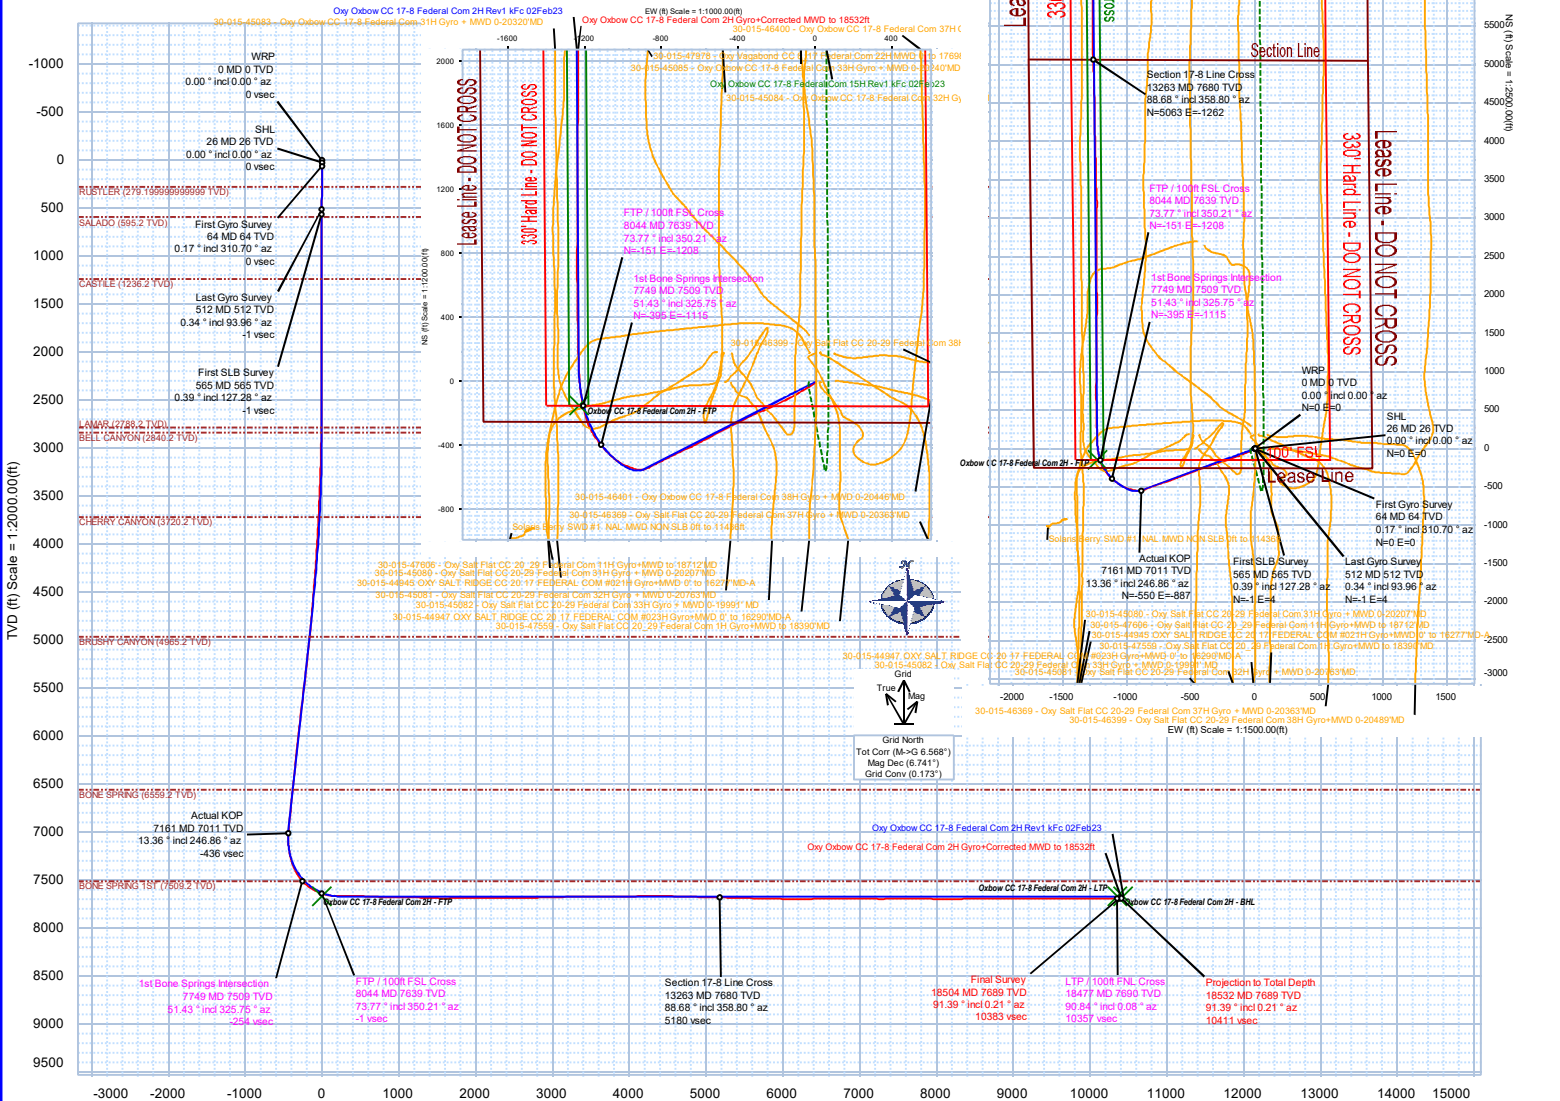



Oxy Oxbow CC 17-8 Federal Com 2H Gyro+Corrected MWD to 18532ft
Survey Geodetic Report
(Def Survey)



Report Date: March 21, 2023 - 10:42 AM
Client: OXY
Field: NM Eddy County (NAD 83)
Structure / Slot: Oxy Oxbow CC 17-8 Federal Com Pad 215 / 2H
Well: Oxbow CC 17-8 Federal Com 2H
Borehole: Oxbow CC 17-8 Federal Com 2H
UWI / API#: Unknown / 30-015-48281

Survey Name: Oxy Oxbow CC 17-8 Federal Com 2H Gyro+Corrected MWD to 18532ft

Survey Date: February 01, 2023
Tort / AHD / DDI / ERD Ratio: 263.448 ° / 12094.262 ft / 6.885 / 1.571
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 12' 39.72064", W 104° 0' 34.24803"
Location Grid N/E Y/X: N 440658.920 ftUS, E 641487.470 ftUS
CRS Grid Convergence Angle: 0.1726 °
Grid Scale Factor: 0.99992058
Version / Patch: 2.10.834.0

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 352.921 ° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: H&P 373, RKB = 26ft
TVD Reference Elevation: 2962.200 ft above MSL
Seabed / Ground Elevation: 2962.200 ft above MSL
Magnetic Declination: 6.741 °

Total Gravity Field Strength: 998.4678mgn (9.80665 Based)
Gravity Model: GARM
Total Magnetic Field Strength: 47483.900 nT
Magnetic Dip Angle: 59.905 °
Declination Date: February 28, 2023
Magnetic Declination Model: IFR1
North Reference: Grid North
Grid Convergence Used: 0.1726 °
Total Corr Mag North->Grid North: 6.5684 °
Local Coord Referenced To: Well Head

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S °)	Longitude (E/W °)
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	0.00	0.00	440658.92	641487.47	N 32.211034	W 104.009513
SHL	26.00	0.00	0.00	26.00	0.00	0.00	0.00	0.00	0.00	0.00	440658.92	641487.47	N 32.211034	W 104.009513
First Gyro Survey	64.03	0.17	310.70	64.03	0.04	0.04	-0.04	0.45	0.06	310.70	440658.96	641487.43	N 32.211034	W 104.009513
	148.63	0.19	341.01	148.63	0.27	0.25	-0.18	0.11	0.31	323.85	440659.17	641487.29	N 32.211034	W 104.009514
	232.04	0.73	106.74	232.04	0.19	0.23	0.28	1.03	0.36	50.75	440659.15	641487.75	N 32.211034	W 104.009512
	326.26	0.84	102.78	326.25	-0.28	-0.10	1.53	0.13	1.53	93.62	440658.82	641489.00	N 32.211033	W 104.009508
Last Gyro Survey	419.84	0.93	112.89	419.82	-0.90	-0.54	2.90	0.19	2.95	100.63	440658.38	641490.37	N 32.211032	W 104.009504
First SLB Survey	512.00	0.34	93.96	511.97	-1.32	-0.85	3.86	0.67	3.95	102.47	440658.07	641491.33	N 32.211031	W 104.009501
	565.00	0.39	127.28	564.97	-1.48	-0.97	4.16	0.41	4.27	103.18	440657.95	641491.63	N 32.211031	W 104.009500
	652.00	0.32	121.39	651.97	-1.84	-1.28	4.60	0.09	4.78	105.54	440657.64	641492.07	N 32.211030	W 104.009498
	839.00	0.12	203.01	838.97	-2.33	-1.73	4.97	0.17	5.26	109.21	440657.19	641492.44	N 32.211029	W 104.009497
	933.00	0.07	92.34	932.97	-2.43	-1.82	4.99	0.17	5.31	110.08	440657.10	641492.46	N 32.211028	W 104.009497
	1028.00	0.06	78.20	1027.97	-2.43	-1.82	5.10	0.02	5.41	109.62	440657.10	641492.57	N 32.211028	W 104.009497
	1123.00	0.12	222.60	1122.97	-2.49	-1.88	5.08	0.18	5.42	110.31	440657.04	641492.55	N 32.211028	W 104.009497
	1217.00	0.07	313.88	1216.97	-2.51	-1.91	4.97	0.15	5.33	111.05	440657.01	641492.44	N 32.211028	W 104.009497
	1312.00	0.09	141.93	1311.97	-2.53	-1.93	4.97	0.17	5.34	111.22	440656.99	641492.44	N 32.211028	W 104.009497
	1406.00	0.09	269.44	1405.97	-2.58	-1.99	4.95	0.17	5.33	111.92	440656.93	641492.42	N 32.211028	W 104.009497
	1501.00	0.11	105.01	1500.97	-2.61	-2.01	4.96	0.21	5.35	112.10	440656.91	641492.43	N 32.211028	W 104.009497
	1596.00	0.10	231.92	1595.97	-2.69	-2.09	4.98	0.20	5.40	112.75	440656.83	641492.45	N 32.211028	W 104.009497
	1691.00	0.08	277.97	1690.97	-2.71	-2.13	4.85	0.08	5.30	113.71	440656.79	641492.32	N 32.211028	W 104.009498
	1786.00	0.08	135.27	1785.97	-2.75	-2.17	4.83	0.16	5.30	114.17	440656.75	641492.30	N 32.211028	W 104.009498
	1881.00	0.12	207.32	1880.97	-2.88	-2.30	4.83	0.13	5.35	115.49	440656.62	641492.30	N 32.211027	W 104.009498
	1976.00	0.07	61.45	1975.97	-2.94	-2.37	4.84	0.19	5.39	116.05	440656.56	641492.31	N 32.211027	W 104.009498
	2072.00	0.07	28.28	2071.97	-2.87	-2.29	4.92	0.04	5.42	114.92	440656.63	641492.39	N 32.211027	W 104.009497
	2166.00	0.15	61.91	2165.97	-2.78	-2.18	5.05	0.11	5.50	113.30	440656.74	641492.52	N 32.211027	W 104.009497
	2261.00	0.03	316.90	2260.97	-2.72	-2.10	5.15	0.17	5.56	112.20	440656.82	641492.62	N 32.211028	W 104.009497
	2357.00	0.08	311.69	2356.97	-2.65	-2.04	5.08	0.05	5.47	111.85	440656.88	641492.55	N 32.211028	W 104.009497
	2452.00	0.12	62.38	2451.97	-2.56	-1.95	5.12	0.17	5.48	110.83	440656.97	641492.59	N 32.211028	W 104.009497
	2547.00	0.12	153.70	2546.97	-2.62	-1.99	5.25	0.18	5.61	110.76	440656.93	641492.72	N 32.211028	W 104.009496
	2642.00	0.34	215.10	2641.97	-2.92	-2.31	5.13	0.32	5.63	114.23	440656.61	641492.60	N 32.211027	W 104.009497
	2737.00	1.31	220.40	2736.95	-3.87	-3.37	4.27	1.02	5.44	128.28	440655.55	641491.74	N 32.211024	W 104.009500
	2832.00	1.92	219.19	2831.92	-5.70	-5.43	2.56	0.64	6.00	154.78	440653.49	641490.03	N 32.211019	W 104.009505
	2927.00	2.52	224.95	2926.84	-8.09	-8.14	0.08	0.67	8.14	179.47	440650.78	641487.55	N 32.211011	W 104.009513
	3022.00	3.17	231.27	3021.73	-10.75	-11.26	-3.45	0.76	11.78	197.03	440647.66	641484.02	N 32.211003	W 104.009525
	3117.00	3.78	230.79	3116.55	-13.79	-14.88	-7.92	0.64	16.86	208.03	440644.04	641479.55	N 32.210993	W 104.009539
	3213.00	4.39	228.71	3212.31	-17.54	-19.31	-13.14	0.65	23.35	214.23	440639.61	641474.33	N 32.210981	W 104.009556
	3308.00	5.08	231.08	3306.98	-21.81	-24.35	-19.14	0.75	30.97	218.17	440634.57	641468.33	N 32.210967	W 104.009575
	3403.00	5.69	234.12	3401.56	-26.29	-29.75	-26.23	0.71	39.66	221.40	440629.17	641461.24	N 32.210952	W 104.009598
	3498.00	6.32	234.39	3496.04	-31.06	-35.56	-34.30	0.66	49.40	223.97	440623.36	641453.18	N 32.210936	W 104.009625
	3593.00	6.83	233.07	3590.42	-36.37	-42.00	-43.06	0.56	60.15	225.72	440616.93	641444.41	N 32.210918	W 104.009653
	3688.00	7.27	236.36	3684.70	-41.87	-48.72	-52.58	0.63	71.68	227.18	440610.20	641434.89	N 32.210900	W 104.009684
	3783.00	7.45	236.26	3778.92	-47.32	-55.47	-62.71	0.19	83.72	228.50	440603.45	641424.77	N 32.210882	W 104.009717
	3878.00	8.08	233.64	3873.04	-53.35	-62.85	-73.21	0.76	96.49	229.35	440596.07	641414.27	N 32.210861	W 104.009751
	3973.00	8.84	233.71	3967.01	-60.18	-71.13	-84.47	0.80	110.43	229.90	440587.80	641403.01	N 32.210839	W 104.009787
	4068.00	9.75	234.28	4060.76	-67.60	-80.15	-96.88	0.96	125.74	230.40	440578.78	641390.60	N 32.210814	W 104.009827
	4163.00	11.26	236.21	4154.17	-75.62	-90.00	-111.12	1.63	143.00	230.99	440568.93	641376.36	N 32.210787	W 104.009873
	4259.00	12.01	238.47	4248.19	-83.97	-100.44	-127.43	0.91	162.25	231.75	440558.49	641360.05	N 32.210758	W 104.009926
	4354.00	13.06	240.42	4340.93	-92.17	-110.90	-145.19	1.19	182.70	232.62	440548.02	641342.30	N 32.210730	W 104.009984
	4449.00	13.60	238.90	4433.37	-100.82	-121.97	-164.08	0.68	204.45	233.37	440536.96	641323.40	N 32.210700	W 104.010045
	4544.00	14.27	239.27	4525.57	-110.07	-133.73	-183.71	0.71	227.23	233.95	440525.21	641303.77	N 32.210667	W 104.010109
	4639.00	15.26	240.29	4617.44	-119.58	-145.90	-204.64	1.08	251.32	234.51	440513.03	641282.85	N 32.210634	W 104.010176
	4734.00	16.40	241.21	4708.83	-129.35	-158.56	-227.25	1.23	277.10	235.10	440500.37	641260.24	N 32.210600	W 104.010250
	4829.00	17.58	242.12	4799.68	-139.40	-171.73	-251.68	1.27	304.69	235.69	440487.21	641235.81	N 32.210564	W 104.010329
	4924.00	19.19	242.92	4889.83	-149.84	-185.55	-278.27	1.72	334.46	236.31	440473.39	641209.22	N 32.210526	W 104.010415
	5019.00	19.28	242.40	4979.53	-160.68	-199.92	-306.07	0.20	365.58	236.85	440459.02	641181.42	N 32.210487	W 104.010505
	5114.00	19.31	240.91	5069.19	-172.06	-214.82	-333.70	0.52	396.86	237.23	440444.12	641153.80	N 32.210446	W 104.010594
	5209.00	19.21	239.15	5158.88	-184.25	-230.47	-360.84	0.62	428.16	237.43	440428.47	641126.66	N 32.210403	W 104.010682
	5304.00	19.40	238.63	5248.53	-197.04	-246.70	-387.73	0.27	459.56	237.53	440412.24	641099.77	N 32.210359	W 104.010769
	5399.00	19.22	238.52	5338.19	-209.99	-263.08	-414.53	0.19	490.97	237.60	440395.86	641072.97	N 32.210314	W 104.010856
	5494.00	19.13	237.61	5427.92	-223.11	-279.58	-441.01	0.33	522.17	237.63	440379.36	641046.49	N 32.210269	W 104.010942
	5589.00	19.41	237.76	5517.60	-236.47	-296.34	-467.51	0.30	553.52	237.63	440362.60	641020.00	N 32.210223	W 104.011028
	5684.00	19.24	237.93	5607.24	-249.80	-313.08	-494.13	0.19	584.96	237.64	440345.87	640993.38	N 32.210177	W 104.011114
	5779.00	19.30	237.91	5696.92	-263.05	-329.73	-520.69	0.06	616.31	237.66	440329.22	640966.82	N 32.210132	W 104.011200
	5874.00	19.42	238.08	5786.55	-276.32	-346.42	-547.40	0.14	647.80	237.67	440312.53	640940.12	N 32.210086	W 104.011286
	5970.00	19.26	237.80	5877.13	-289.75	-363.29	-574.34	0.19	679.60	237.69	440295.66	640913.17	N 32.210040	W 104.011374
	6065.00</													

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (%100ft)	Closure (ft)	Closure Azimuth (°)	Northing (RUS)	Easting (RUS)	Latitude (NS °)	Longitude (EW °)
1st Bone Springs Intersection	7545.00	36.30	308.61	7360.14	-369.61	-499.76	-1025.21	9.19	1140.53	244.01	440159.20	640462.34	N 32 209668	W 104 012833
	7640.00	41.60	320.35	7434.10	-322.81	-457.84	-1067.39	9.55	1161.44	246.78	440201.12	640420.16	N 32 209784	W 104 012969
	7735.00	50.02	324.72	7500.28	-264.04	-403.73	-1108.62	9.45	1179.85	249.99	440255.22	640378.94	N 32 209933	W 104 013101
	7749.10	51.43	325.75	7509.20	-254.38	-394.77	-1114.85	11.51	1182.68	250.50	440264.18	640372.71	N 32 209958	W 104 013121
	7830.00	59.70	330.96	7554.93	-193.71	-337.97	-1149.68	11.51	1198.32	253.62	440320.98	640337.88	N 32 210114	W 104 013234
	7925.00	66.85	342.84	7597.74	-112.34	-260.06	-1182.61	13.45	1210.86	257.60	440398.89	640304.96	N 32 210328	W 104 013339
	8020.00	71.70	349.36	7631.38	-24.19	-173.87	-1203.85	8.20	1216.35	261.78	440485.06	640283.71	N 32 210566	W 104 013407
	8044.00	73.77	350.21	7638.51	-1.31	-151.32	-1207.92	9.26	1217.36	262.86	440507.62	640279.65	N 32 210628	W 104 013420
	8114.00	79.82	352.61	7654.49	66.78	-83.96	-1218.07	9.26	1220.96	266.06	440574.96	640269.50	N 32 210813	W 104 013452
	8209.00	87.13	356.68	7665.29	161.03	9.93	-1226.85	8.79	1226.89	270.46	440668.85	640260.72	N 32 211071	W 104 013480
FTP / 100ft FSL Cross	8305.00	92.27	358.74	7665.79	256.66	105.81	-1230.68	5.77	1235.22	274.91	440764.72	640256.89	N 32 211334	W 104 013491
	8400.00	90.33	359.20	7663.63	351.10	200.77	-1232.39	2.10	1248.63	279.25	440859.67	640255.18	N 32 211595	W 104 013496
	8495.00	88.22	358.73	7664.84	445.56	295.74	-1234.10	2.28	1269.04	283.48	440954.63	640253.47	N 32 211857	W 104 013500
	8590.00	88.04	358.65	7667.94	540.03	390.66	-1236.27	0.21	1296.53	287.54	441049.55	640251.30	N 32 212117	W 104 013507
	8685.00	88.00	0.54	7671.22	634.33	485.60	-1236.95	1.99	1328.85	291.43	441144.48	640250.62	N 32 212378	W 104 013508
	8780.00	88.18	358.67	7674.38	728.62	580.54	-1237.60	1.98	1367.00	295.13	441239.41	640249.97	N 32 212639	W 104 013509
	8875.00	89.23	358.48	7676.53	823.14	675.48	-1239.96	1.12	1412.01	298.58	441334.35	640247.61	N 32 212900	W 104 013516
	8970.00	89.12	1.45	7677.90	917.40	770.46	-1240.02	3.13	1459.89	301.85	441429.32	640247.55	N 32 213161	W 104 013515
	9064.00	89.23	1.19	7679.25	1010.38	864.43	-1237.85	0.30	1509.81	304.93	441523.28	640249.72	N 32 213420	W 104 013507
	9159.00	89.41	359.64	7680.38	1104.56	959.42	-1237.17	1.64	1565.59	307.79	441618.26	640250.40	N 32 213681	W 104 013504
Section 17-8 Line Cross	9254.00	89.71	359.50	7681.11	1198.92	1054.41	-1237.88	0.35	1626.08	310.42	441713.25	640249.69	N 32 213942	W 104 013505
	9349.00	88.92	0.26	7682.25	1293.21	1149.40	-1238.08	1.15	1689.37	312.87	441808.23	640249.49	N 32 214203	W 104 013505
	9445.00	88.23	0.25	7684.63	1388.40	1245.37	-1237.65	0.72	1755.77	315.18	441904.19	640249.92	N 32 214667	W 104 013503
	9540.00	87.95	0.34	7687.80	1482.56	1340.32	-1237.16	0.31	1824.01	317.29	441999.13	640250.41	N 32 214728	W 104 013500
	9635.00	90.26	0.42	7689.28	1576.74	1435.30	-1236.53	2.43	1894.49	319.25	442094.10	640251.04	N 32 214989	W 104 013497
	9731.00	90.70	0.39	7688.48	1671.91	1531.29	-1235.85	0.46	1967.79	321.09	442190.09	640251.72	N 32 215253	W 104 013494
	9826.00	90.30	0.86	7687.65	1766.05	1626.28	-1234.82	0.65	2041.95	322.79	442285.07	640252.75	N 32 215514	W 104 013490
	9921.00	90.98	0.74	7686.59	1860.15	1721.27	-1233.49	0.73	2117.61	324.37	442380.05	640254.08	N 32 215775	W 104 013485
	10016.00	90.87	0.10	7685.06	1954.32	1816.25	-1232.80	0.68	2195.12	325.83	442475.02	640254.77	N 32 216036	W 104 013482
	10112.00	89.98	359.91	7684.34	2049.59	1912.25	-1232.79	0.95	2275.18	327.19	442571.01	640254.78	N 32 216300	W 104 013481
Section 17-8 Line Cross	10207.00	88.65	359.53	7685.48	2143.91	2007.24	-1233.25	1.46	2355.82	328.43	442665.99	640254.32	N 32 216561	W 104 013481
	10302.00	89.41	359.41	7687.09	2238.28	2102.22	-1234.13	0.81	2437.70	329.58	442760.97	640253.44	N 32 216822	W 104 013483
	10397.00	90.43	359.48	7687.22	2332.66	2197.21	-1235.05	1.08	2520.53	330.66	442855.95	640252.52	N 32 217083	W 104 013485
	10492.00	89.59	359.89	7687.20	2427.00	2292.21	-1235.57	0.98	2604.01	331.67	442950.94	640252.00	N 32 217344	W 104 013486
	10587.00	92.11	1.37	7685.79	2521.12	2387.18	-1234.53	3.08	2687.51	332.65	443045.91	640253.04	N 32 217605	W 104 013482
	10682.00	90.12	359.47	7683.95	2615.28	2482.15	-1233.83	2.90	2771.90	333.57	443140.87	640253.74	N 32 217866	W 104 013478
	10777.00	90.43	0.11	7683.49	2709.60	2577.15	-1234.18	0.75	2857.43	334.41	443235.86	640253.39	N 32 218127	W 104 013479
	10873.00	91.19	359.58	7682.13	2804.89	2673.14	-1234.44	0.97	2944.41	335.21	443331.84	640253.13	N 32 218391	W 104 013479
	10968.00	90.74	358.54	7680.53	2899.33	2768.11	-1236.00	1.19	3031.52	335.94	443426.81	640251.57	N 32 218652	W 104 013483
	11063.00	90.60	0.49	7679.42	2993.69	2863.10	-1236.80	2.06	3118.82	336.64	443521.79	640250.77	N 32 218913	W 104 013484
Section 17-8 Line Cross	11157.00	91.82	0.61	7677.44	3086.83	2957.07	-1235.90	1.30	3204.95	337.32	443615.75	640251.67	N 32 219172	W 104 013481
	11252.00	91.82	0.63	7674.42	3180.93	3052.02	-1234.87	0.02	3292.37	337.97	443710.69	640252.70	N 32 219433	W 104 013476
	11346.00	90.07	1.56	7672.87	3273.96	3145.98	-1233.08	2.11	3379.01	338.60	443804.65	640254.49	N 32 219691	W 104 013470
	11439.00	89.67	357.73	7673.08	3366.30	3238.96	-1233.65	4.14	3465.95	339.15	443897.62	640253.92	N 32 219946	W 104 013471
	11534.00	89.37	358.10	7673.88	3460.94	3333.90	-1237.11	0.50	3556.02	339.64	443992.55	640250.46	N 32 220207	W 104 013481
	11627.00	90.70	359.79	7673.82	3553.42	3426.88	-1238.82	2.31	3643.92	340.12	444085.52	640248.75	N 32 220463	W 104 013486
	11722.00	90.19	358.98	7673.08	3647.81	3521.87	-1239.84	1.01	3733.73	340.61	444180.50	640247.73	N 32 220724	W 104 013488
	11816.00	91.11	359.27	7672.02	3741.25	3615.85	-1241.28	1.03	3822.97	341.05	444274.47	640246.29	N 32 220982	W 104 013492
	11910.00	91.00	359.27	7670.28	3834.66	3709.82	-1242.47	0.12	3912.36	341.48	444368.44	640245.10	N 32 221241	W 104 013495
	12004.00	90.44	359.00	7669.10	3928.10	3803.81	-1243.89	0.66	4002.03	341.89	444462.42	640243.68	N 32 221499	W 104 013498
Section 17-8 Line Cross	12098.00	89.91	358.97	7668.82	4021.57	3897.79	-1245.56	0.56	4091.97	342.28	444556.39	640242.01	N 32 221757	W 104 013503
	12193.00	90.44	359.01	7668.53	4116.04	3992.77	-1247.23	0.56	4183.04	342.65	444651.37	640240.34	N 32 222018	W 104 013507
	12288.00	90.14	359.18	7668.05	4210.49	4087.76	-1248.73	0.36	4274.24	343.01	444746.35	640238.84	N 32 222280	W 104 013511
	12383.00	90.01	359.43	7667.92	4304.90	4182.75	-1249.89	0.30	4365.51	343.36	444841.33	640237.69	N 32 222541	W 104 013514
	12479.00	90.70	359.77	7667.33	4400.24	4278.75	-1250.56	0.80	4457.76	343.71	444937.32	640237.02	N 32 222805	W 104 013515
	12574.00	89.47	359.54	7667.19	4494.59	4373.75	-1251.13	1.32	4549.17	344.04	445032.31	640236.44	N 32 223066	W 104 013516
	12669.00	88.71	35											

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (%100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S °)	Longitude (E/W °)
	17606.00	90.39	359.88	7692.95	9492.20	9404.33	-1294.73	0.73	9493.04	352.16	450062.48	640192.85	N 32.236893	W 104.013609
	17701.00	89.71	359.85	7692.87	9586.50	9499.33	-1294.95	0.72	9587.19	352.24	450157.48	640192.62	N 32.237154	W 104.013609
	17796.00	90.28	2.12	7692.88	9680.56	9594.31	-1293.32	2.46	9681.09	352.32	450252.45	640194.26	N 32.237415	W 104.013602
	17892.00	89.57	358.68	7693.00	9775.73	9690.29	-1292.65	3.66	9776.13	352.40	450348.42	640194.93	N 32.237679	W 104.013599
	17986.00	90.51	359.13	7692.94	9869.21	9784.27	-1294.44	1.11	9869.53	352.46	450442.40	640193.13	N 32.237938	W 104.013604
	18082.00	90.95	359.03	7691.72	9964.65	9880.25	-1295.98	0.47	9964.89	352.53	450538.37	640191.59	N 32.238201	W 104.013608
	18178.00	90.10	0.20	7690.84	10059.99	9976.24	-1296.63	1.51	10060.15	352.59	450634.35	640190.95	N 32.238465	W 104.013609
	18273.00	89.99	0.58	7690.76	10154.18	10071.24	-1295.98	0.42	10154.28	352.67	450729.34	640191.59	N 32.238726	W 104.013606
	18368.00	90.09	0.28	7690.70	10248.37	10166.24	-1295.27	0.33	10248.42	352.74	450824.33	640192.30	N 32.238987	W 104.013603
	18463.00	90.56	0.01	7690.16	10342.61	10261.24	-1295.03	0.57	10342.63	352.81	450919.32	640192.55	N 32.239249	W 104.013602
LTP / 100ft FNL Cross	18477.00	90.84	0.08	7689.98	10356.50	10275.24	-1295.02	2.08	10356.52	352.82	450933.32	640192.56	N 32.239287	W 104.013601
Final Survey	18504.00	91.39	0.21	7689.46	10383.28	10302.23	-1294.95	2.08	10383.30	352.84	450960.31	640192.62	N 32.239361	W 104.013601
Projection to Total Depth	18532.00	91.39	0.21	7688.78	10411.05	10330.22	-1294.85	0.00	10411.06	352.86	450988.30	640192.73	N 32.239438	W 104.013600

Survey Type: Def Survey

Survey Error Model: ISCWSA Rev 3 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type	Borehole / Survey
	1	0.000	26.000	1/98.425	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Oxbow CC 17-8 Federal Com 2H / Oxy Oxbow CC 17-8 Federal Com 2H Gyro+Corrected MWD to
	1	26.000	26.000	Act Stns	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Oxbow CC 17-8 Federal Com 2H / Oxy Oxbow CC 17-8 Federal Com 2H Gyro+Corrected MWD to
	1	26.000	512.000	Act Stns	26.400	26.400	GYD_GC+DROP+OH	Oxbow CC 17-8 Federal Com 2H / Oxy Oxbow CC 17-8 Federal Com Oxbow CC 17-8 Federal Com 2H /
	1	512.000	18532.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS	Oxy Oxbow CC 17-8 Federal Com 2H Gyro+Corrected MWD to

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP) (SEE AS-DRILLED C-102 PLAT)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP) (SEE AS-DRILLED C-102 PLAT)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP) (SEE AS-DRILLED C-102 PLAT)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Well Name: OXBOW CC 17-8 FED COM	Well Location: T24S / R29E / SEC 17 / SESW / 32.21103 / -104.009519	County or Parish/State: EDDY / NM
Well Number: 2H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM94651	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001548281	Well Status: Producing Oil Well	Operator: OXY USA INCORPORATED

Subsequent Report

Sundry ID: 2742090

Type of Submission: Subsequent Report	Type of Action: Workover Operations
Date Sundry Submitted: 07/20/2023	Time Sundry Submitted: 02:10
Date Operation Actually Began: 04/23/2023	

Actual Procedure: RUPU 04/23/23, RIH & clean out to PBTD @ 18487', pressure test casing to 6000# for 30 min, good test. RIH & perf @ 8131-18397' Total 1260 holes. Frac in 42 stages w/ 412983BBL Produced Water + 28114BBL Brackish Water (> 1,000 mg/I TDS and 10,000 mg/I TDS) w/ 25782485# sand, RD NexTier 05/08/23. Well ready to produce 05/24/23. OXY USA Inc. requests a tubing exception while continuing to flow back this well. The estimated date of tubing install is 10/31/2023.

Well Name: OXBOW CC 17-8 FED
COM

Well Location: T24S / R29E / SEC 17 /
SESW / 32.21103 / -104.009519

County or Parish/State: EDDY /
NM

Well Number: 2H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM94651

Unit or CA Name:

Unit or CA Number:

US Well Number: 3001548281

Well Status: Producing Oil Well

Operator: OXY USA
INCORPORATED

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JANA MENDIOLA

Signed on: JUL 20, 2023 02:10 PM

Name: OXY USA INCORPORATED

Title: Regulatory Coordinator

Street Address: PO BOX 50250

City: Midland

State: TX

Phone: (432) 685-5936

Email address: Janalyn_mendiola@oxy.com

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: JONATHON W SHEPARD

BLM POC Title: Petroleum Engineer


BLM POC Phone: 5752345972

BLM POC Email Address: jshepard@blm.gov

Disposition: Accepted

Disposition Date: 07/20/2023

Signature: Jonathon Shepard

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG										
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)					5. Lease Name or Unit Agreement Name OXBOW CC 17-8 FEDERAL COM 6. Well Number: 2H					
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER										
8. Name of Operator: OXY USA INC.					9. OGRID: 16696					
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710					11. Pool name or Wildcat CEDAR CANYON; BONE SPRING					
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	N	17	24S	29E		255	SOUTH	1727	WEST	EDDY
BH:	D	8	24S	29E		50	NORTH	495	WEST	EDDY
13. Date Spudded 01/03/23	14. Date T.D. Reached 03/18/2023		15. Date Rig Released 03/21/2023		16. Date Completed (Ready to Produce) 05/24/2023		17. Elevations (DF and RKB, RT, GR, etc.) 2936' GL			
18. Total Measured Depth of Well 18532'M 7689'V			19. Plug Back Measured Depth 18487'M 7689'V		20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run CBL			
22. Producing Interval(s), of this completion - Top, Bottom, Name 15922-18397' 1 ST Bone Spring										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
10.75" J55		45.5		525'		14.75"		480sx-surf circ		
7.625" HCL80		26.4		7023'		9.875"		2130sx-surf		
5.5" P110CY		20		18512'		6.75"		1224sx-TOC@6523'		
24. LINER RECORD										
SIZE	TOP	BOTTOM		SACKS CEMENT	SCREEN		25. TUBING RECORD			
							SIZE	DEPTH SET		PACKER SET
26. Perforation record (interval, size, and number) 15922-18397' Total 1260 holes, Hole Size=0.42						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
						DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED		
						15922-18397'		412983BBL Produced Water + 28114BBL Brackish Water (> 1,000 mg/l TDS and < 10,000 mg/l TDS) w/ 25782485# sand		
28. PRODUCTION										
Date First Production 06/01/2023		Production Method (Flowing, gas lift, pumping - Size and type pump) FLOWING				Well Status (Prod. or Shut-in) Prod.				
Date of Test 06/20/2023	Hours Tested 24 hrs.	Choke Size 128/128	Prod'n For Test Period	Oil - Bbl 557	Gas - MCF 1261	Water - Bbl. 1114	Gas - Oil Ratio 2264			
Flow Tubing Press.	Casing Pressure 824	Calculated 24- Hour Rate	Oil - Bbl. 557	Gas - MCF 1261	Water - Bbl. 1114	Oil Gravity - API - (Corr.)				
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD							30. Test Witnessed By			
31. List Attachments WBD										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.							33. Rig Release Date:			
34. If an on-site burial was used at the well, report the exact location of the on-site burial: Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Printed										
Signature: 		Name: <u>Jana Mendiola</u>			Title: <u>Sr. Regulatory Analyst</u>			Date: <u>07/23/2023</u>		
E-mail Address: <u>janalyn_mendiola@oxy.com</u>										

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.


Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 280'	T. Bell Canyon 2841'	T. Ojo Alamo	T. Penn A"
T. Salado 596'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 1237'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 2789'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 3732'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 4975'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Springs 6592'	T. Todilto	
T. Abo	T. 1 st Bone Springs 7748'	T. Entrada	
T. Wolfcamp	T. 2 nd Bone Springs	T. Wingate	
T. Penn	T. 3 rd Bone Springs	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....
No. 2, from.....to.....
No. 3, from.....to.....
No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505				Form C-105 Revised April 3, 2017				
WELL COMPLETION OR RECOMPLETION REPORT AND LOG										
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)						5. Lease Name or Unit Agreement Name OXBOW CC 17-8 FEDERAL COM		6. Well Number: 2H		
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER										
8. Name of Operator: OXY USA INC.						9. OGRID: 16696				
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710						11. Pool name or Wildcat PIERCE CROSSING; BONE SPRING				
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	N	17	24S	29E		255	SOUTH	1727	WEST	EDDY
BH:	D	8	24S	29E		50	NORTH	495	WEST	EDDY
13. Date Spudded 01/03/23		14. Date T.D. Reached 03/18/2023		15. Date Rig Released 03/21/2023		16. Date Completed (Ready to Produce) 05/24/2023		17. Elevations (DF and RKB, RT, GR, etc.) 2936' GL		
18. Total Measured Depth of Well 18532'M 7689'V				19. Plug Back Measured Depth 18487'M 7689'V		20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run CBL		
22. Producing Interval(s), of this completion - Top, Bottom, Name 8131-13253' 1 ST Bone Spring										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
10.75" J55		45.5		525'		14.75"		480sx-surf circ		
7.625" HCL80		26.4		7023'		9.875"		2130sx-surf		
5.5" P110CY		20		18512'		6.75"		1224sx-TOC@6523'		
24. LINER RECORD										
SIZE	TOP	BOTTOM		SACKS CEMENT	SCREEN		25. TUBING RECORD			
							SIZE	DEPTH SET	PACKER SET	
26. Perforation record (interval, size, and number) 8131-13253' Total 1260 holes, Hole Size=0.42						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
						DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED		
						8131-13253'		412983BBL Produced Water + 28114BBL Brackish Water (> 1,000 mg/l TDS and < 10,000 mg/l TDS) w/ 25782485# sand		
28. PRODUCTION										
Date First Production 06/01/2023		Production Method (Flowing, gas lift, pumping - Size and type pump) FLOWING					Well Status (Prod. or Shut-in) Prod.			
Date of Test 06/20/2023	Hours Tested 24 hrs.	Choke Size 128/128	Prod'n For Test Period	Oil - Bbl 557	Gas - MCF 1261	Water - Bbl. 1114	Gas - Oil Ratio 2264			
Flow Tubing Press.	Casing Pressure 824	Calculated 24- Hour Rate	Oil - Bbl. 557	Gas - MCF 1261	Water - Bbl. 1114	Oil Gravity - API - (Corr.)				
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD								30. Test Witnessed By		
31. List Attachments WBD										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.								33. Rig Release Date:		
34. If an on-site burial was used at the well, report the exact location of the on-site burial:										
Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Printed										
Signature: 		Name: <u>Jana Mendiola</u>			Title: <u>Sr. Regulatory Analyst</u>			Date: <u>07/23/2023</u>		
E-mail Address: <u>janalyn_mendiola@oxy.com</u>										

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 280'	T. Bell Canyon 2841'	T. Ojo Alamo	T. Penn A"
T. Salado 596'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 1237'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 2789'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 3732'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 4975'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Springs 6592'	T. Todilto	
T. Abo	T. 1 st Bone Springs 7748'	T. Entrada	
T. Wolfcamp	T. 2 nd Bone Springs	T. Wingate	
T. Penn	T. 3 rd Bone Springs	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....

No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

Continuation of Form No. 1 (When additional sheet is necessary)

From	To	Thickness In Feet	Lithology

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505				Form C-105 Revised April 3, 2017				
WELL COMPLETION OR RECOMPLETION REPORT AND LOG										
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)						5. Lease Name or Unit Agreement Name OXBOW CC 17-8 FEDERAL COM		6. Well Number: 2H		
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER										
8. Name of Operator: OXY USA INC.						9. OGRID: 16696				
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710						11. Pool name or Wildcat PIERCE CROSSING; BONE SPRING, EAST				
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	N	17	24S	29E		255	SOUTH	1727	WEST	EDDY
BH:	D	8	24S	29E		50	NORTH	495	WEST	EDDY
13. Date Spudded 01/03/23		14. Date T.D. Reached 03/18/2023		15. Date Rig Released 03/21/2023		16. Date Completed (Ready to Produce) 05/24/2023		17. Elevations (DF and RKB, RT, GR, etc.) 2936' GL		
18. Total Measured Depth of Well 18532'M 7689'V				19. Plug Back Measured Depth 18487'M 7689'V		20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run CBL		
22. Producing Interval(s), of this completion - Top, Bottom, Name 13276-15899' 1 ST Bone Spring										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
10.75" J55		45.5		525'		14.75"		480sx-surf circ		
7.625" HCL80		26.4		7023'		9.875"		2130sx-surf		
5.5" P110CY		20		18512'		6.75"		1224sx-TOC@6523'		
24. LINER RECORD										
SIZE	TOP	BOTTOM		SACKS CEMENT	SCREEN		25. TUBING RECORD			
							SIZE	DEPTH SET	PACKER SET	
26. Perforation record (interval, size, and number) 13276-15899' Total 1260 holes, Hole Size=0.42						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
						DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED		
						13276-15899'		412983BBL Produced Water + 28114BBL Brackish Water (> 1,000 mg/l TDS and < 10,000 mg/l TDS) w/ 25782485# sand		
28. PRODUCTION										
Date First Production 06/01/2023		Production Method (Flowing, gas lift, pumping - Size and type pump) FLOWING					Well Status (Prod. or Shut-in) Prod.			
Date of Test 06/20/2023	Hours Tested 24 hrs.	Choke Size 128/128	Prod'n For Test Period	Oil - Bbl 557	Gas - MCF 1261	Water - Bbl. 1114	Gas - Oil Ratio 2264			
Flow Tubing Press.	Casing Pressure 824	Calculated 24- Hour Rate	Oil - Bbl. 557	Gas - MCF 1261	Water - Bbl. 1114	Oil Gravity - API - (Corr.)				
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD								30. Test Witnessed By		
31. List Attachments WBD										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.								33. Rig Release Date:		
34. If an on-site burial was used at the well, report the exact location of the on-site burial:										
Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Printed										
Signature: 		Name: <u>Jana Mendiola</u>			Title: <u>Sr. Regulatory Analyst</u>			Date: <u>07/23/2023</u>		
E-mail Address: <u>janalyn_mendiola@oxy.com</u>										

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 280'	T. Bell Canyon 2841'	T. Ojo Alamo	T. Penn A"
T. Salado 596'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 1237'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 2789'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 3732'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 4975'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Springs 6592'	T. Todilto	
T. Abo	T. 1 st Bone Springs 7748'	T. Entrada	
T. Wolfcamp	T. 2 nd Bone Springs	T. Wingate	
T. Penn	T. 3 rd Bone Springs	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	


No. 1, from.....to.....
No. 2, from.....to.....
No. 3, from.....to.....
No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

OXY USA Inc.
OXBOW CC 17-8 FED COM 2H
API No. 30-015-48281

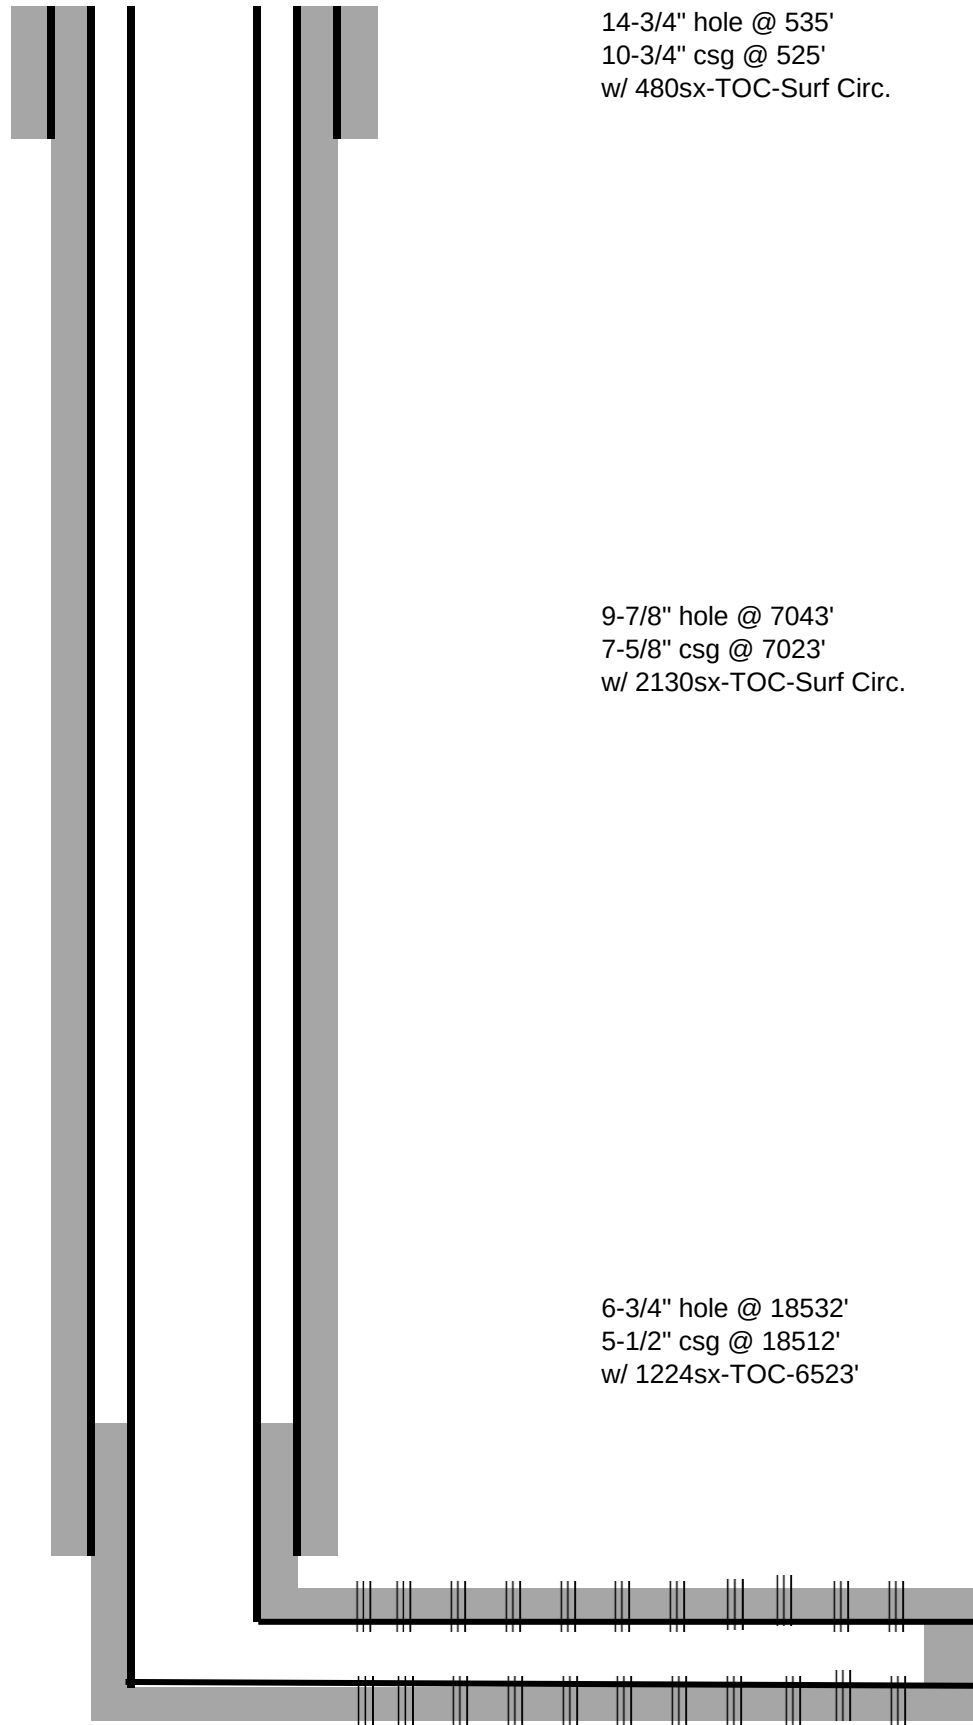

Perfs @ 8131-18397'

TD- 18532'M 7689'V

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 300188

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 300188
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 300188

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 300188
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
smcgrath	File 3160-4 within 10 days of BLM Approval.	1/19/2024