

U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Well Name: HOMER COM	Well Location: T24N / R10W / SEC 29 / NENW / 36.288457 / -107.921918	County or Parish/State: SAN JUAN / NM
Well Number: 90S	Type of Well: OTHER	Allottee or Tribe Name:
Lease Number: NMNM134598	Unit or CA Name: FRCL HOMER	Unit or CA Number: NMNM118422
US Well Number: 300453352700S1	Operator: DUGAN PRODUCTION CORPORATION	

Notice of Intent

Sundry ID: 2897573

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 02/24/2026

Time Sundry Submitted: 03:31

Date proposed operation will begin: 04/06/2026

Procedure Description: Dugan Production plans to plug and abandon the well per the attached procedure.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

- Homer_Com_90S_Rec_Plan_2_24_26_20260224152959.pdf
- Homer_Com_90S_proposed_PA_formation_tops_20260224152950.pdf
- Homer_Com_90S_proposed_PA_planned_wellbore_schematic_20260224152943.pdf
- Homer_Com_90S_proposed_PA_current_wellbore_schematic_20260224152937.pdf
- Homer_Com_90S_proposed_PA_planned_work_20260224152930.pdf

Well Name: HOMER COM

Well Location: T24N / R10W / SEC 29 / NENW / 36.288457 / -107.921918

County or Parish/State: SAN JUAN / NM

Well Number: 90S

Type of Well: OTHER

Allottee or Tribe Name:

Lease Number: NMNM134598

Unit or CA Name: FRCL HOMER

Unit or CA Number: NMNM118422

US Well Number: 300453352700S1

Operator: DUGAN PRODUCTION CORPORATION

Conditions of Approval

Specialist Review

General_Requirement_PxA_20260227103841.pdf

Homer_Com_90S_Geo_KR_20260227103748.pdf

2897573_90S_3004533527_NOIA_KR_02272026_20260227103740.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: TYRA FEIL

Signed on: FEB 24, 2026 03:30 PM

Name: DUGAN PRODUCTION CORPORATION

Title: Authorized Representative

Street Address: PO BOX 420

City: FARMINGTON

State: NM

Phone: (505) 325-1821

Email address: TYRAFEIL@DUGANPRODUCTION.COM

Field

Representative Name: Aliph Reena

Street Address: PO Box 420

City: Farmington

State: NM

Zip: 87499-0420

Phone: (505)360-9192

Email address: Aliph.Reena@duganproduction.com

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5055647742

BLM POC Email Address: krennick@blm.gov

Disposition: Approved

Disposition Date: 02/27/2026

Signature: Kenneth Rennick

Dugan Production plans to plug and abandon the well per the following procedure:

- Run 5 ½" casing scraper to 1045'.
- RIH & set 5½" cement retainer to 1035'. **Fruitland Coal perforations @ 1073'-1096'.**
- Load and circulate hole.
- Attempt to pressure test casing to 600 psi for 30 mins.
- Run CBL from 1035' to surface. Plug is designed assuming good cement behind 5½" casing for this NOI. Will make necessary changes to the plugs after reviewing the CBL.
- **Plug I, Fruitland perfs-Pictured Cliffs-Fruitland-Kirtland-Ojo Alamo tops-surface csg shoe-surface** : Sting in the cement retainer at 1035'. Squeeze 20 sks, 23 cu ft Class G cement to cover the Fruitland perforations below the retainer till top perforation at 1073'. Sting out. Spot P0lug I inside 5½" casing above cement retainer @ 1035' w/123 sks (141.45 cu ft) Class G cement to cover the Fruitland perfs. Pictured Cliffs-Fruitland-Kirtland-Ojo Alamo tops-surface csg shoe-surface (5 gal/sk, 15.8 #/gal, 1.15 cu ft/sk). Total 143 sks, 164.45 cu ft. Tag and verify. **Plug I, Inside 5½" casing, cement retainer at 1035', 143 sks, 164.45 cu ft, Fruitland perforations-Pictured Cliffs-Fruitland-Kirtland-Ojo Alamo tops-surface csg shoe-surface, 0'-1073'.**
- Cut wellhead off. Fill casing w/cement in case needed. Install dry hole marker.
- Clean location. Rig down and move.
- Take pictures of the dry hole marker. Show API number clearly on the dry hole marker.
- Attach GPS Coordinates of the dry hole marker to the final sundry.

Current Wellbore Schematic

Homer Com 90S


30-045-33527

Basin Fruitland Coal

1150' FNL & 1850' FWL

C-S29-T24N-R10W

San Juan County, NM

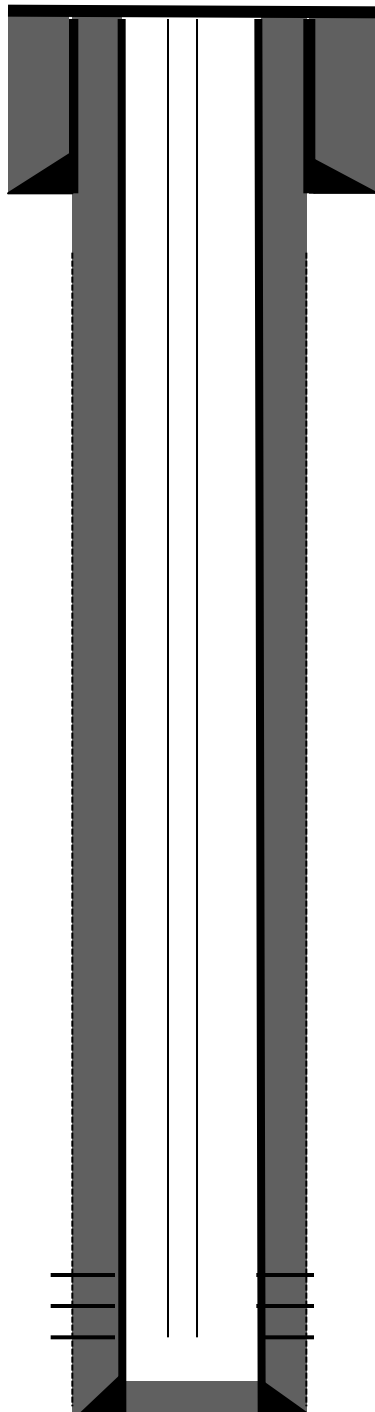

8-5/8" 24#, J-55 casing @ 130': Hole size - 12-1/4"

Cemented w/ 95 sks, type 5 cement w/2% CaCl₂ w/ 1/4# celloflake/sx.
(112 cu ft total slurry) Circulated 4 bbls cement

2-3/8" J-55 tubing ran to 1148'

5 1/2" 15.5# J-55 casing @ 1310'. Hole size: 7"

Cement w/ 70 sx type 5 with 2% lodense, w/ 2# phenoseal & 1/4#
celloflake/sx. Tail w/50 sx, type 5 cement w/2# Phenoseal and w/ 1/4#
celloflake/sx. (210 cu ft. total slurry) Circulate 7 bbl cement

Fruitland Coal Perforated @ 1073' - 1096' w/ 4 spf

PBTD @ 1268', TD 1320'

Planned P & A Wellbore Schematic

Homer Com 90S


30-045-33527

Basin Fruitland Coal

1150' FNL & 1850' FWL

C-S29-T24N-R10W

San Juan County, NM

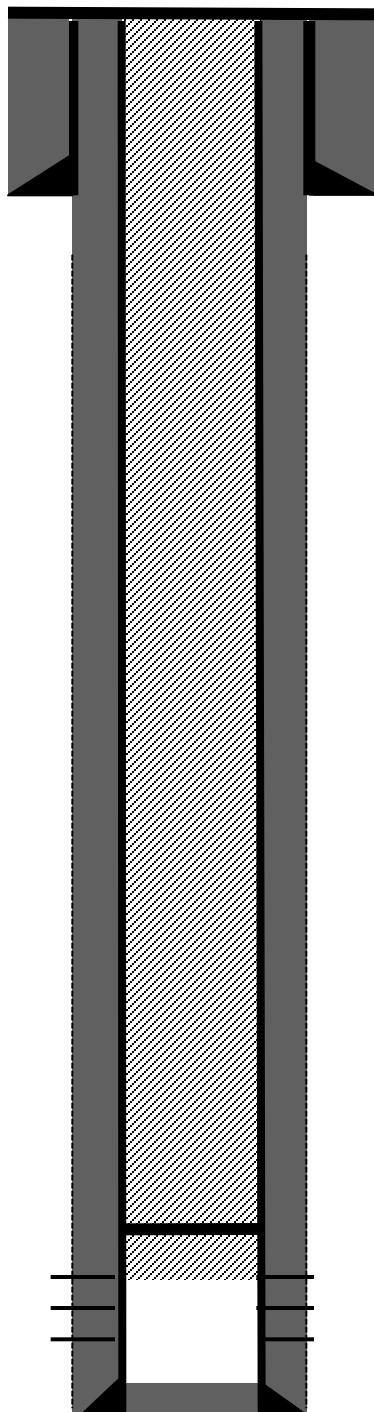

8-5/8" 24#, J-55 casing @ 130': Hole size - 12-1/4"

Cemented w/ 95 sks, type 5 cement w/2% CaCl₂ w/ 1/4# celloflake/sx. (112 cu ft total slurry) Circulated 4 bbls cement

5 1/2" 15.5# J-55 casing @ 1310'. Hole size: 7"

Cement w/ 70 sx type 5 with 2% lodense, w/ 2# phenoseal & 1/4# celloflake/sx. Tail w/50 sx, type 5 cement w/2# Phenoseal and w/ 1/4# celloflake/sx. (210 cu ft. total slurry) Circulate 7 bbl cement

Set 5 1/2" CR @ 1035'. Squeeze 20 sks, 23 Cu. ft cement to cover the Fruitland Perforations below the retainer.

Plug I, Inside 5 1/2" casing, Cement Retainer at 1035', 143 sks, 164.45 Cu ft, Fruitland Perforations-Pictured Cliffs-Fruitland-Kirtland-Ojo Alamo tops- Surface csg shoe -Surface, 0'-1073'.

Fruitland Coal Perforated @ 1073' - 1096' w/ 4 spf

PBTD @ 1268', TD 1320'

Homer Com 90S
30-045-33527
Basin Fruitland Coal
1150' FNL & 1850' FWL
C-S29-T24N-R10W
San Juan County, NM

Elevation: 6586' GL

Formation Tops (Operator Submitted)

- **Surface Casing - 130'**
- **Ojo Alamo - 48'**
- **Kirtland - 137'**
- **Fruitland - 710'**
- **Perforations - 1073'- 1096'**
- **Pictured Cliffs - 1098'**



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Farmington District Office
6251 College Boulevard, Suite A
Farmington, New Mexico 87402
<http://www.blm.gov/nm>



CONDITIONS OF APPROVAL

February 27, 2026

Notice of Intent – Plug and Abandonment

Operator: Dugan Production Corporation
Lease: NMNM 134598
Agreement: NMNM 118422
Well(s): Homer Com 90S, US Well # 30-045-33527
Sundry Notice ID #: 2897573

The Notice of Intent to Plug and Abandon is accepted with the following Conditions of Approval (COA):

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
2. The following modifications to your plugging program are to be made:
 - a. Complete wellbore fill up. No changes to the procedure.
3. **Notification:** Farmington Office is to be notified at least 24 hours before the plugging operations commence at (505) 564 7750.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

K. Rennick 2/27/2026

**GENERAL REQUIREMENTS FOR
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES
FARMINGTON FIELD OFFICE**

- 1.0 The approved plugging plans may contain variances from the following minimum general requirements.
- 1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.
 - 1.2 Requirements may be added to address specific well conditions.
- 2.0 Materials used must be accurately measured. (densometer/scales)
- 3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.
- 3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.
- 4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.
- 4.1 The cement shall be as specified in the approved plugging plan.
 - 4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
 - 4.3 Surface plugs may be no less than 50' in length.
 - 4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
 - 4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.
 - 4.6 **A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.**

5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.
- 5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.
- 5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.
- 5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

- 6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.
- 6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H₂S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), through the Automated Fluid Minerals Support System (AFMSS) with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.

BLM - FFO - Geologic Report

Date Completed

2/27/2026

Well No. Homer Com 90S
 US Well No. 30-045-33527
 Lease No. NMNM 134598
 Agreement No. NMNM 118422
 Operator Dugan Production Corporation Formation Basin Fruitland Coal

Geologic Formations	Est. tops	Remarks
Surface Casing	130	
Ojo Alamo	48	
Kirtland	137	
Fruitland Fm	710	
Top Perforation	1073	
Bottom	1096	
Pictured Cliffs	1098	

Remarks:

Reference Well:

Complete wellbore fill up. No changes to the procedure.

NA

Prepared by: Kenneth Rennick

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 559191

CONDITIONS

Operator: DUGAN PRODUCTION CORP PO Box 420 Farmington, NM 87499	OGRID: 6515
	Action Number: 559191
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
loren.diede	Notify the OCD inspection supervisor via email 24 hours prior to beginning Plug & Abandon (P&A) operations.	3/3/2026
loren.diede	Submit photo and GPS coordinates of the P&A marker with the C-103P subsequent P&A report. The API# on the marker must be clearly legible.	3/3/2026