
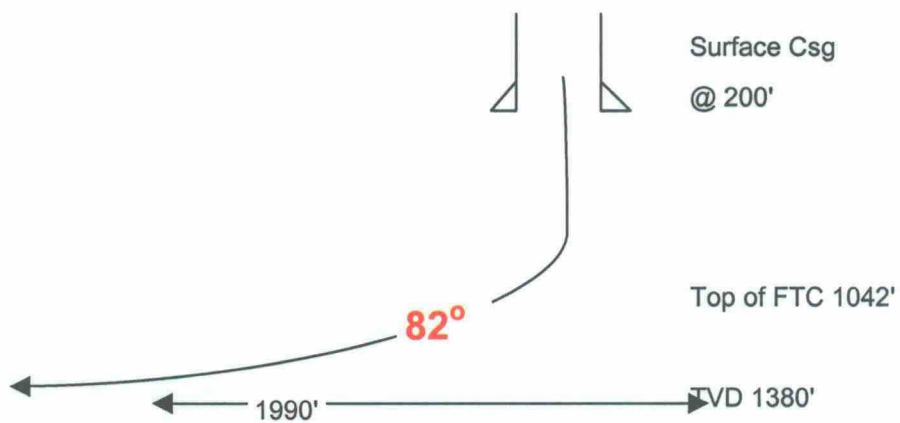


Burlington Resources

Deviated Hole


R13W

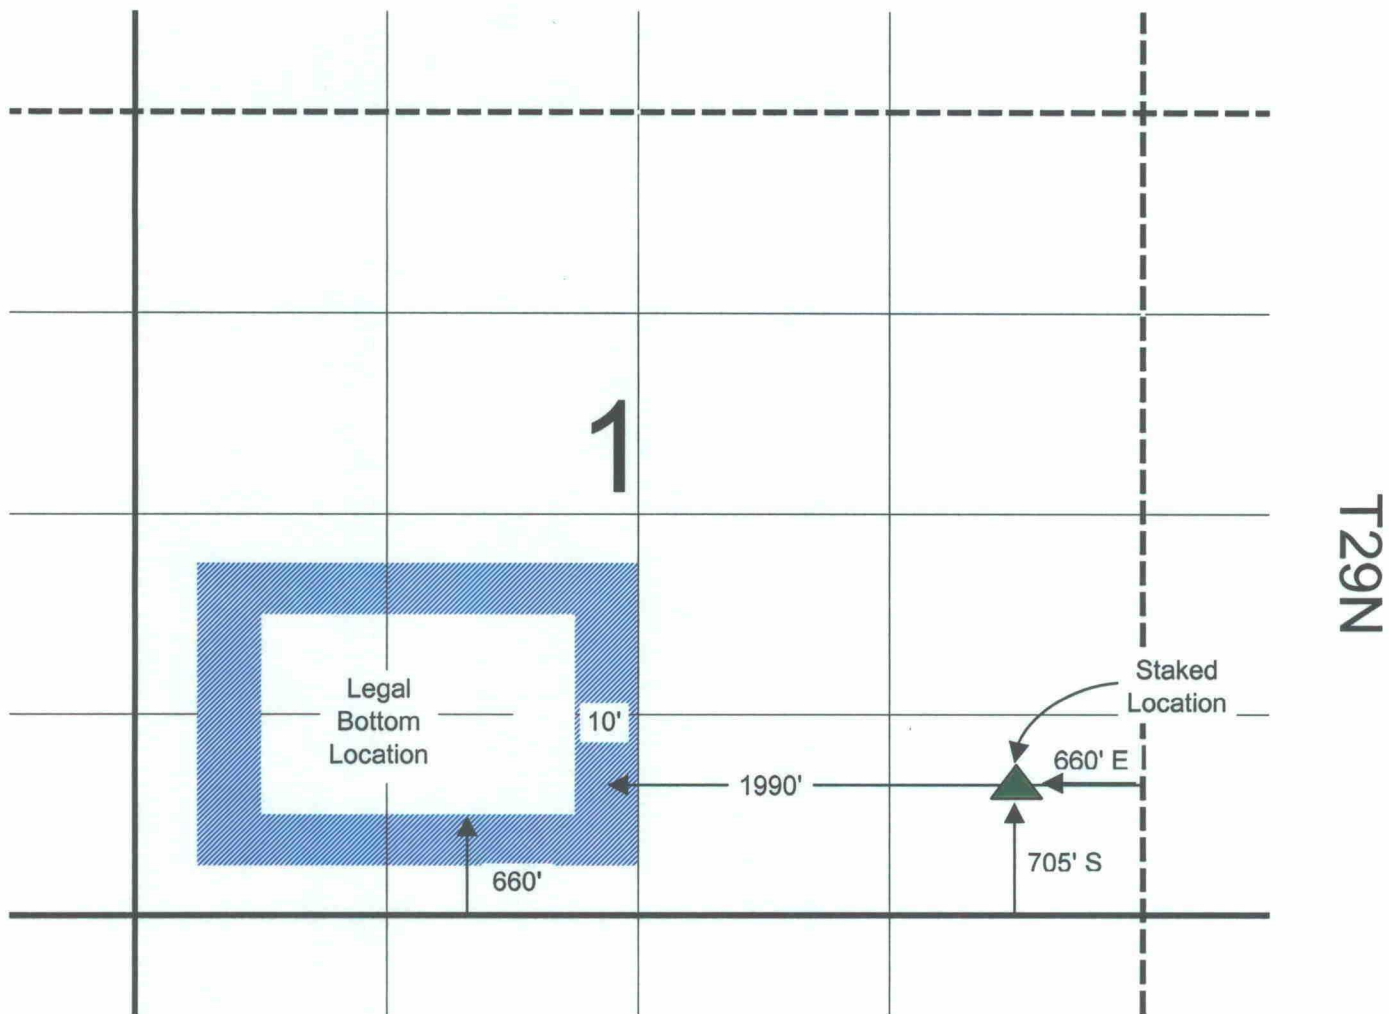

Burlington Resources

Deviated Hole Diagrams

Section 1, T-29-N, R-13-W

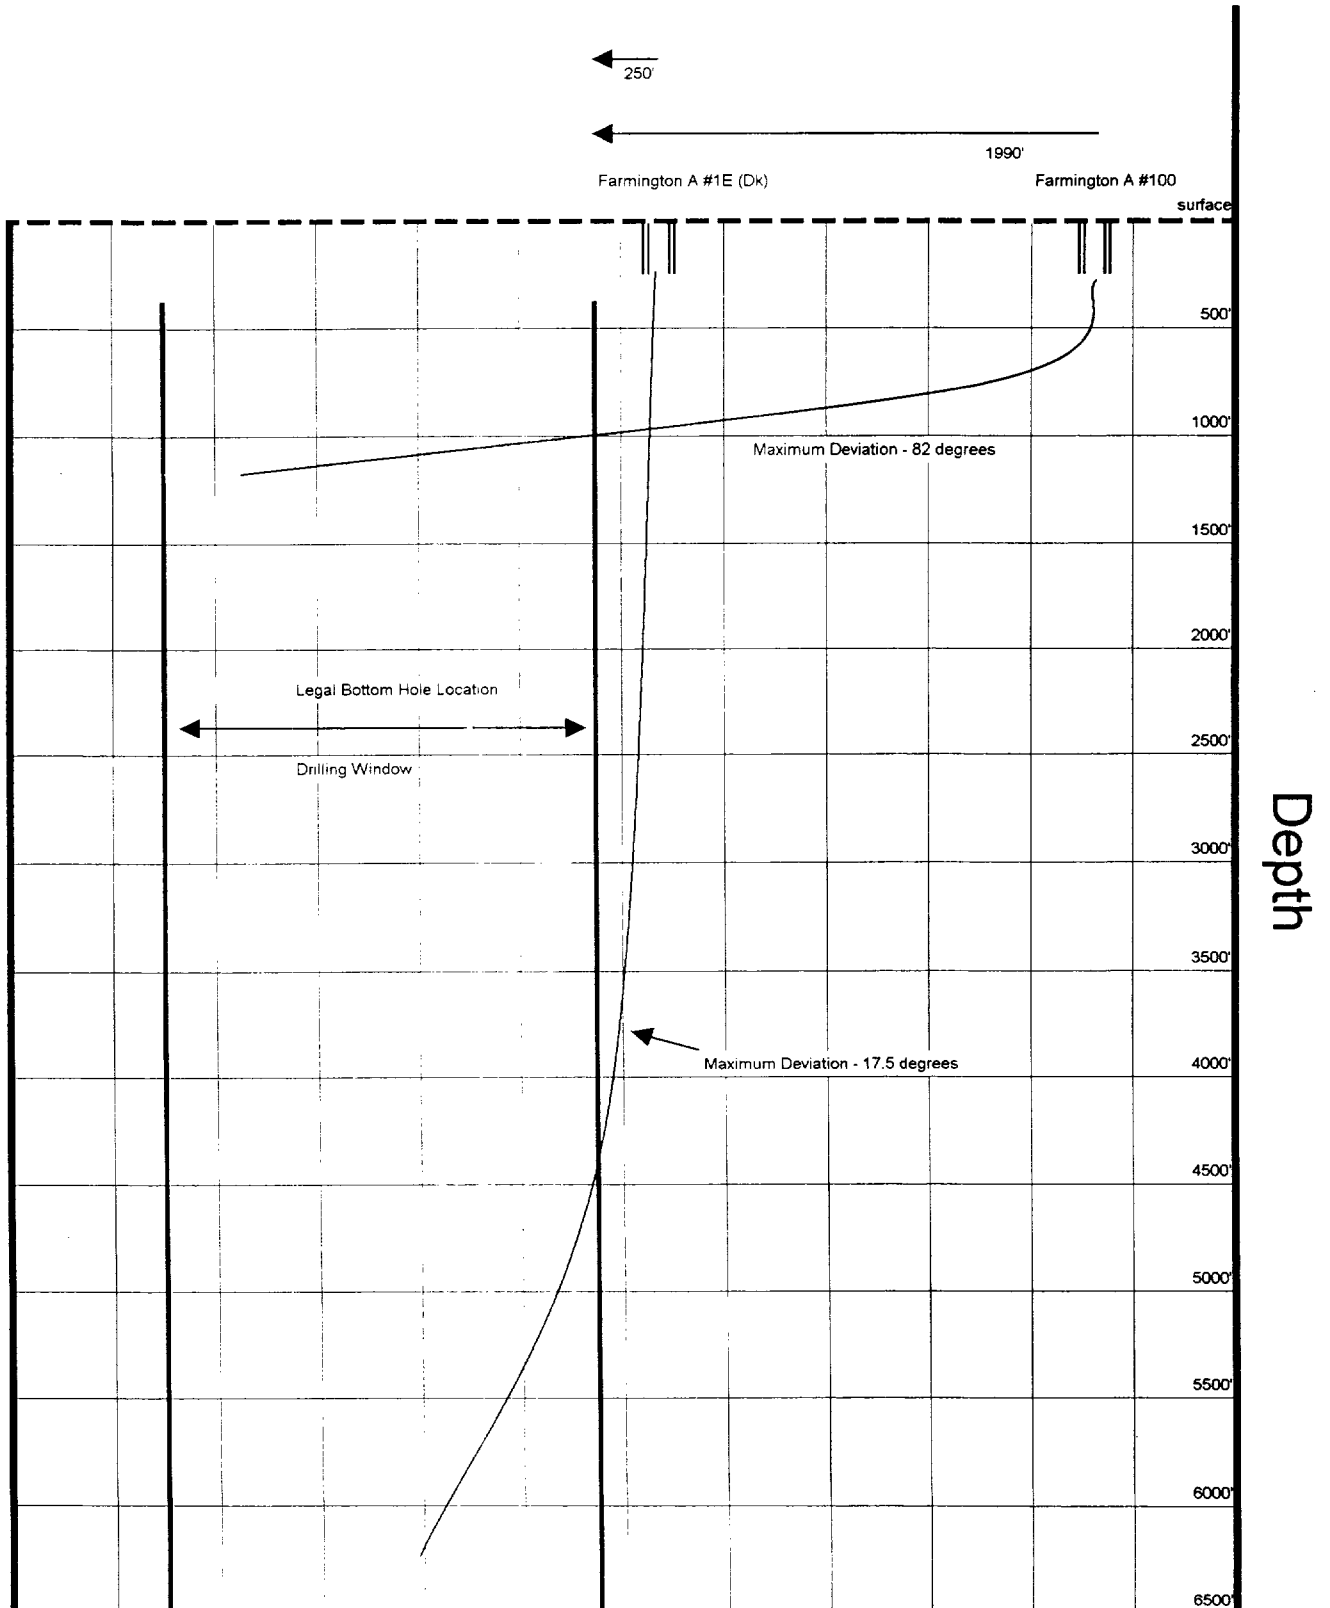

FAX TRANSMITTAL



INTEQ

Date _____ No. of pages including this page _____
To John Hostford, From Verry C
Company _____ Company _____
Phone _____ Phone _____
Fax _____ Fax _____

To report transmission problems, call the phone number above.

COMMENTS:

John - I don't think this is possible
- No weight in vertical hole.

BURLINGTON

Structure : SEC.13-T29N-R13W

Stol : stol #1

Field : SAN JUAN COUNTY

Location : NEW MEXICO

Created by Jerry
Date plotted : 1-Dec-2006
Plot Reference is WINDL
Coordinates are 1° feet reference stol #1.
True Vertical Depths are reference rotary table.
--- Baker Hughes INTEC ---

WELL PROFILE DATA

Point	VD	Inc	Dip	TVD	North	East	V. Sect	Dep./100
Tie in	0.00	0.00	270.00	0.00	0.00	0.00	0.00	0.00
KOP	250.00	0.00	270.00	250.00	0.00	0.00	0.00	0.00
End of Build	944.15	82.10	270.00	732.94	0.00	-41.86	316.57	12.00
Target	3153.66	82.10	270.00	1042.00	0.00	-2540.00	2221.46	0.00
T.D. & End of Drop	4523.74	82.31	270.00	1380.00	0.00	-3420.00	3228.57	0.00

<-- West (feet)


LEGAL WINDOW

Surface 0.00 N, 0.00 E

Target - 1042.00 Tvd, 0.00 S, 2640.00 W

T.D. & End of Drop - 1380.00 Tvd, 0.00 S, 3920.00 W

South (feet) -->

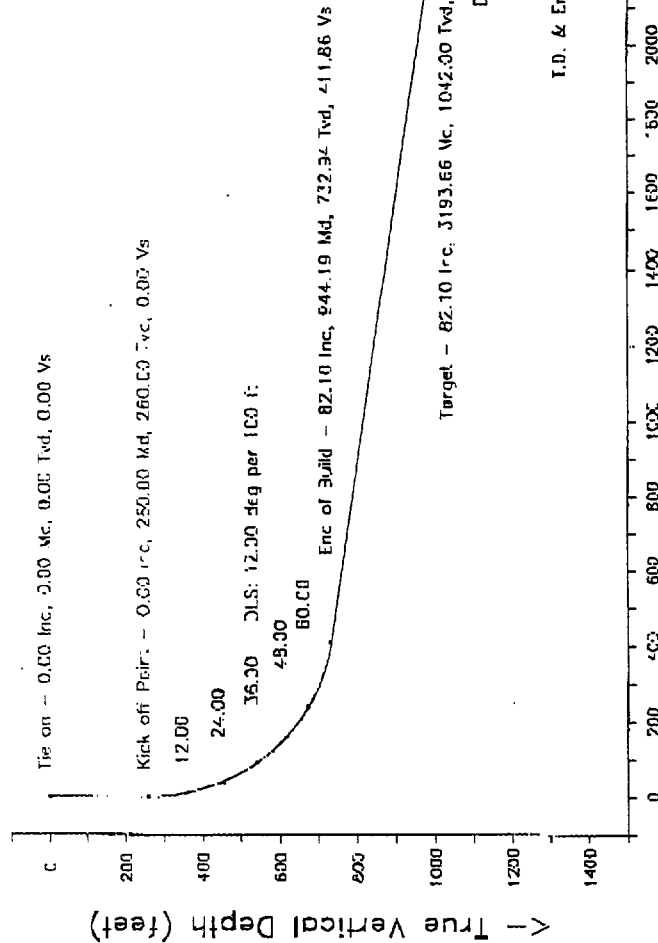

Azimuth 270.00 with reference 0.00 N, 0.00 E from stol #1

BURLINGTON
SEC.13-T29N-R13W

slot #1
SAN JUAN COUNTY
NEW MEXICO

P R O P O S A L L I S T I N G

by
Baker Hughes INTEQ

Your ref : INITIAL
Our ref : prcp4886
License :

Date printed : 1-Dec-2000
Date created : 1-Dec-2000
Last revised : 1-Dec-2000

Field is centred on n36 50 0.000,w107 30 0
Structure is centred on n36 50 0.000,w107 30 0

Slot location is n36 50 0.000,w107 30 0.000
Slot Grid coordinates are N 2122763.937, E 597550.598
Slot local coordinates are 0.00 N 0.00 E

Projection type: mercator - New Mexico West (3003), Spheroid: Clarke - 1866

Reference North is True North

Measured Depth	Inclin. Degrees	Azimuth Degrees	True Vert Depth	R E C T A N G U L A R C O O R D I N A T E S	Dogleg Deg/100ft
0.00	0.00	270.00	0.00	0.00 E	0.00
260.00	0.00	270.00	260.00	0.00 E	0.00
360.00	12.00	270.00	359.27	10.43 W	12.00
460.00	24.00	270.00	454.20	41.28 W	12.00
560.00	36.00	270.00	540.65	91.19 W	12.00
660.00	48.00	270.00	614.83	157.98 W	12.00
760.00	60.00	270.00	673.50	238.73 W	12.00
860.00	72.00	270.00	714.10	329.92 W	12.00
944.19	82.10	270.00	732.94	411.86 W	12.00
1000.00	82.10	270.00	740.50	457.14 W	0.00
1500.00	82.10	270.00	809.30	952.40 W	0.00
2000.00	82.10	270.00	878.00	1457.66 W	0.00
2500.00	82.10	270.00	946.70	1952.92 W	0.00
3000.00	82.10	270.00	1015.39	2448.18 W	0.00
3193.66	82.10	270.00	1042.00	2640.00 W	0.00
3194.85	82.09	270.00	1042.16	2641.18 W	1.04
3294.85	81.05	270.00	1056.82	2740.10 W	1.04
3394.85	80.01	270.00	1073.27	2838.74 W	1.04
3494.85	78.97	270.00	1091.51	2937.06 W	1.04
3594.85	77.93	270.00	1111.52	3035.03 W	1.04
3694.85	76.89	270.00	1133.31	3132.63 W	1.04
3794.85	75.86	270.00	1156.87	3229.81 W	1.04
3894.85	74.82	270.00	1182.18	3326.56 W	1.04
3994.85	73.78	270.00	1209.25	3422.82 W	1.04
4094.85	72.74	270.00	1238.05	3518.58 W	1.04

All data is in feet unless otherwise stated.
 Coordinates from slot #1 and TVD from rotary table.
 Bottom hole distance is 3920.00 on azimuth 270.00 degrees from wellhead.
 Calculation uses the minimum curvature method.
 Presented by Baker Hughes INTEQ

PROPOSAL LISTING Page 2
Your ref : INITIAL
Last revised : 1-Dec-2000

BURLINGTON
SEC.13-T29N-R13W, slot #1
SAN JUAN COUNTY, NEW MEXICO

Measured Depth	Inclin. Degrees	Azimuth Degrees	True Vert Depth	R E C T A N G U L A R C O O R D I N A T E S	Dogleg Deg/100ft
1194.85	71.70	270.00	1268.59	0.00 S 3613.80 W	1.04
1294.85	70.66	270.00	1300.85	0.00 S 3708.46 W	1.04
1394.85	69.62	270.00	1334.82	0.00 S 3802.51 W	1.04
1494.85	68.58	270.00	1370.49	0.00 S 3895.93 W	1.04
1520.74	68.31	270.00	1380.00	0.00 S 3920.00 W	1.04

All data is in feet unless otherwise stated.
Coordinates from slot #1 and TVD from rotary table.
Bottom hole distance is 3920.00 on azimuth 270.00 degrees from wellhead.
Calculation uses the minimum curvature method.
Presented by Baker Hughes INTEQ

PROPOSAL LISTING Page 3
Your ref : INITIAL
Last revised : 1-Dec-2000

BURLINGTON
SEC.13-T29N-R13W,slot #1
SAN JUAN COUNTY,NEW MEXICO

Casing positions in string 'A'

=====

Top MD	Top TVD	Rectangular Coords.	Bot MD	Bot TVD	Rectangular Coords.	Casing
0.00	0.00	0.00N	n/a	0.00	0.00N 0.00E	CASING B

Targets associated with this wellpath

=====

Target name	Geographic Location	T.V.D.	Rectangular Coordinates	Revised
LEGAL WINDOW	1042.CO	615.00N	3300.00W	1-Dec-200