

LONG STRING EQUIPMENT

1-10' PUP
1-4' PUP
129 jts. 2 3/8" OD Butt.
X-Over
28 jts. 1 1/4" I.J.

BAKER Parallel Anchor
22 jts. 1 1/4" I.J.
X-Over
29 jts. 2 3/8" OD Butt.
BAKER Latch-Type
Seal Ass'y.
BAKER TYPE "E"
Flow Tube


SHORT STRING EQUIPMENT

1-2' PUP
108 jts. 2 3/8" OD Butt.
X-Over
47 jts. 2" OD Butt.
Seating nipple (1 foot)
1-3' Perforated nipple
1 jt. 2" OD Butt. (31.29')
BAKER 1 1/4" Stinger
(Latch Type, 5.7 long)

NOTE

Long String Landed On
East Side.
Short String On West Side.
Long String Set With
4000 lbs. Tension.
Short String Set With
2000 lbs. Tension

All Measurements
From Rotary Table.

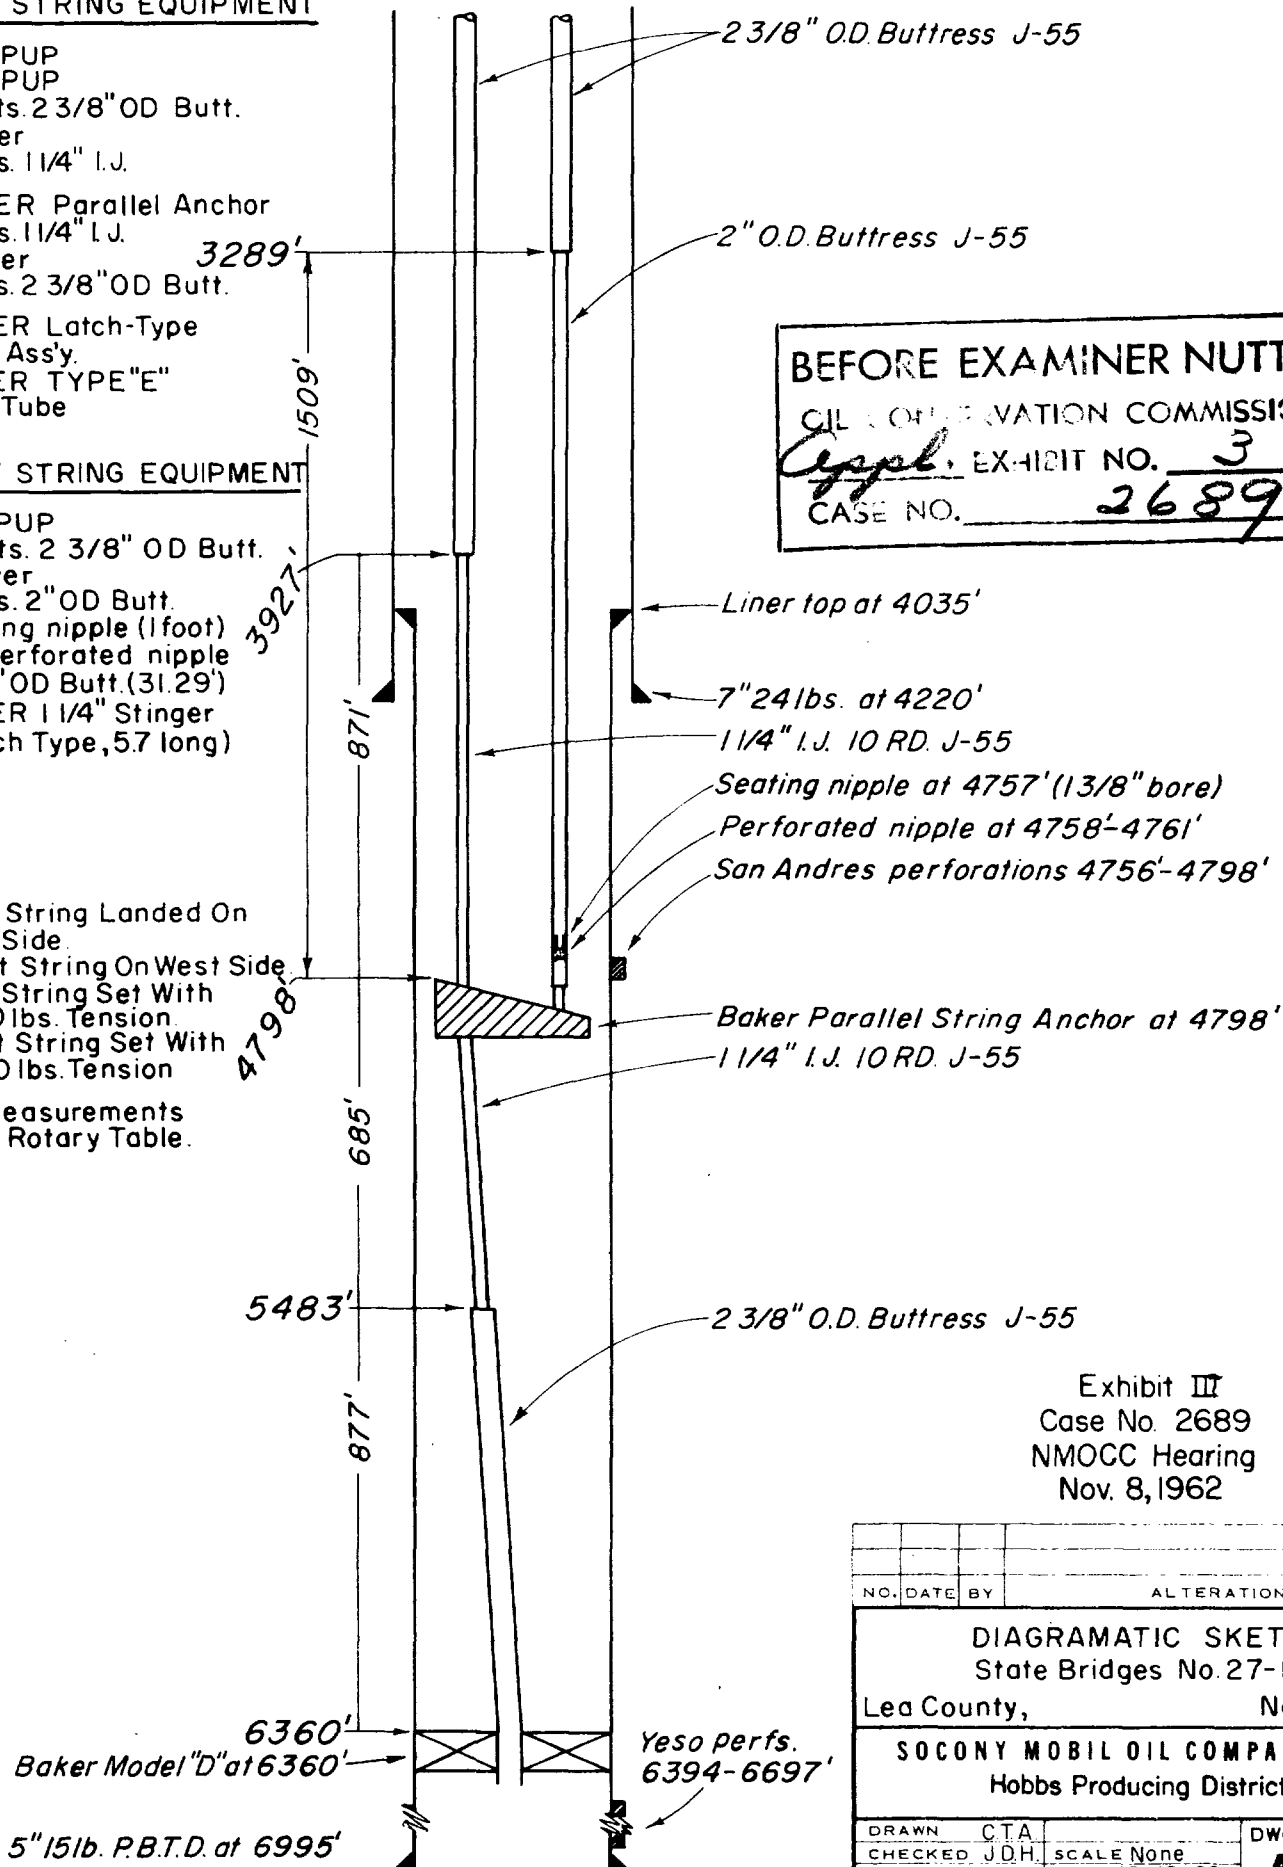

BEFORE EXAMINER NUTTER

OIL CONSERVATION COMMISSION

EXHIBIT NO. 3
CASE NO. 2689

Exhibit III
Case No. 2689
NMOCC Hearing
Nov. 8, 1962

NO.	DATE	BY	ALTERATION
DIAGRAMATIC SKETCH State Bridges No. 27-DD Lea County, New Mexico			
SOCONY MOBIL OIL COMPANY, INC. Hobbs Producing District			
DRAWN	CTA	SCALE	DWG. NO.
CHECKED	J.D.H.	None	A-159-D&P
		DATE	10-12-62