



CURTIS INMAN
Wait Canyon Unit #1

SEC 3, T-22-S, R-24-E
KB 3953' TD 10,694'

B



SFEOP, LP.
Righthand Canyon "34" #1

SEC 34, T-21-S, R-24-E
KB 3774' TD 9890'



SFEOP, LP.
Rocky Top Federal "27" #1

SEC 27, T-21-S, R-24-E
KB: PTD 10,300'



ANADARKO PROD.
Pardue Farms #1


SEC 27, T-21-S, R-24-E
KB 3702' TD 9853'




RALPH LOWE
Staple #1

SEC 22, T-21-S, R-24-E
KB 8678' TD 9900'


B'

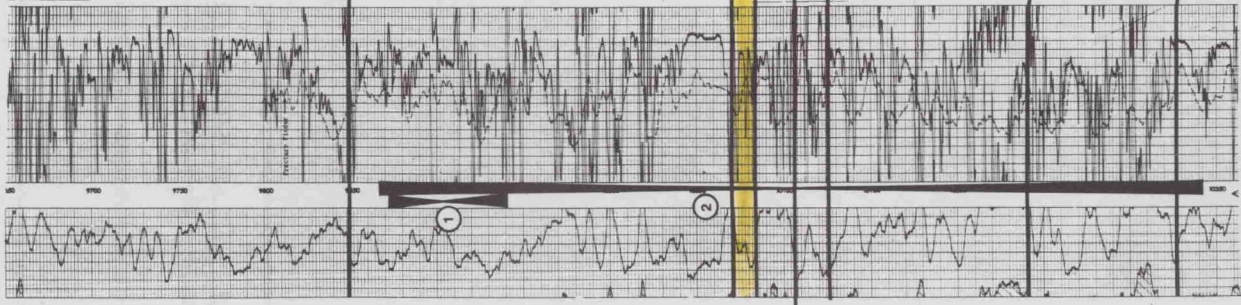


Comp: 4-64
1 DST: 9,872-9,940', op 90 mins, rec 30' mud, FP 101F, SIP 3038F/90 mins.
2 DST: 9,856-10,341', op 3 hrs, rec 500' mud, FP 134-102F, SIP 229F/90 mins.
D&A.

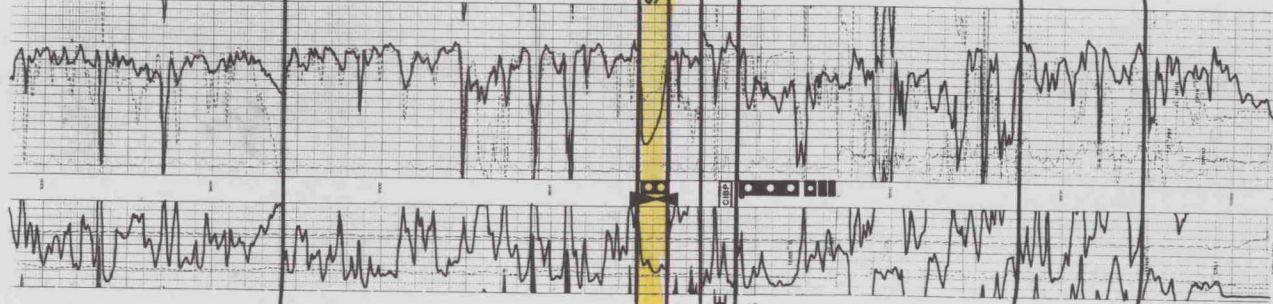

Comp: 8-92
1 DST: 9,648-9,673', op 64', GTS 25' @ 745 MCF w/ 10' 546 MCFP @ SI
SC Rec: 4.58 cfs @ 1180F, 1050
CC filtrate wt: 600' FFP 4379F/30
60' FFP 2051-3039F, 540F FSP 3821F, FHP 4372F.
Perf: 9,712-9,746' @ 1 spf (35 holes), 9,750-9,756', 9,758-9,762', 9,764-9,770' (35 holes).
Ac w/300 gals 10% acetic acid.
Ac w/3000 gals 7-1/2% HCL.
Flow test 24 hrs @ 214 BW, 0 BO, 635 MCFD, @ 730 psi FFP.
Well shut in.

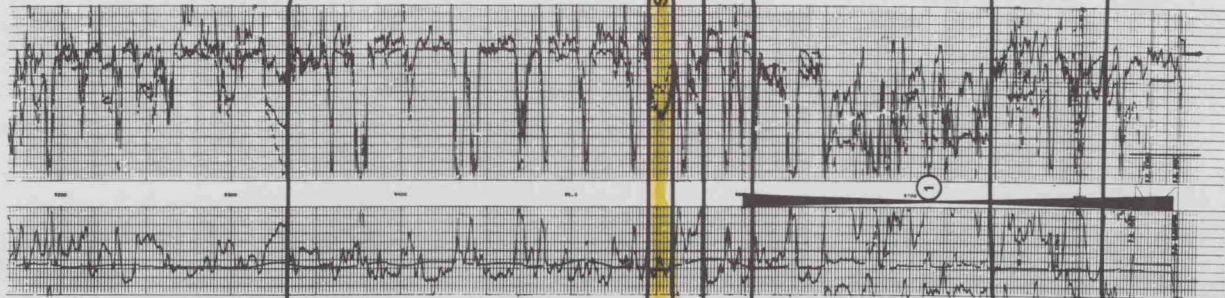

Comp: 2-78
1 DST: 9,601-9,853', op 1 hr 10 mins, GTS 17 mins @ 757M, rec 300' all mud, FP 121F, SIP 1211F, FP 297-314F 120' FSP 1599F.
PB to 9,158', attempt Cileco/Canyon completion.
D&A.

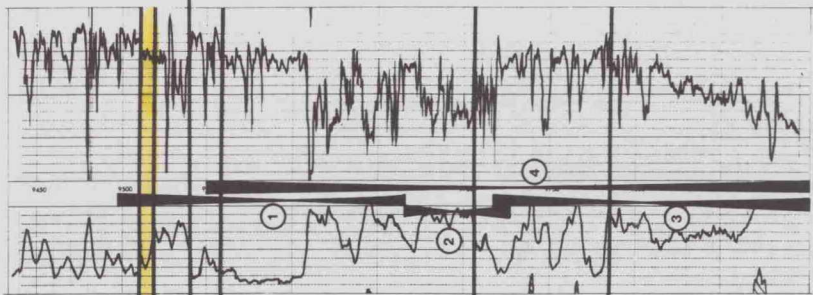

Comp: 9-63
1 DST: 9,458-9,565', op 1 hr, GTS 8 min @ 600 MCFD, rec 570' GTS, FP 307-307F, SIP 3787F/30 mins.
2 DST: 9,666-9,728', op 1 hr, GTS 10', rec 285' GCH, FP 69-115F, SIP 3787F/30'.
3 DST: 9,718-9,990', op 1 hr, rec 35' mud, FP 127-127F, SIP 724F/30 min.
4 DST: 9,550-9,900', op 3-1/2 hrs, GTS 8 min @ 600 MCFD, rec 570' GTS, GCH, FP 130-130F, SIP 3838F/30 mins.
D&A.

BEFORE EXAMINER STOGNER
OIL CONSERVATION DIVISION
Santa Fe
EXHIBIT NO. 9
CASE NO. 10628/10629