District IHOBBS OCDState of New1625 N. French Dr., Hobbs, NM 88240Energy Minerals and IDistrict IIII1301 W. Grand Avenue, Artesia, NM 88240DepartmDistrict IIIAPR 0 3 20131000 Rio Brazos Road, Aztec, NM 87410	Natural Resources July 21, 2008 Nent For closed-loop systems that only use above pround steel tanks or haut-off blus and propose	
District IV 1220 South St. 1220 S. St. Francis Dr., Santa Fe, NM 87505 RECEIVED Santa Fe, NM Santa Fe, NM	to the appropriate randood District office.	
Closed-Loop System Permit or Closure Plan Application		
(that only use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)		
Type of action:		
Instructions: Please submit one application (Form C-144 CLEZ) per individual closed-loop system request. For any application request other than for a closed-loop system that only use above ground steel tanks or haul-off bins and propose to implement waste removal for closure, please submit a Form C-144. Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the		
cnvironment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.		
Operator: Cimarex Energy Co.	OGRID #:	
Address: 600 N. Marienfeld St., Stc. 600; Midland, TX 79701		
Facility or well name: Lynch 25 Federal 2H		
API Number: <u>30-025-</u> 41090 OCD Po	rmit Number: PI-0 5995	
U/L or Qtr/Qtr P Section 25 Township 20S Range 34E		
Center of Proposed Design: Latitude <u>32° 32' 19.21"</u> Longitude <u>103° 30' 20.36"</u> NAD: □1927 ⊠ 1983		
Surface Owner: A Federal A State Private Tribal Trust or Indian Allotment		
2. Closed-loop System: Subsection H of 19.15.17.11 NMAC		
Operation: \square Drilling a new well \square Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) \square P&A		
Above Ground Steel Tanks or 🛛 Haul-off Bins		
3. Signs: Subsection C of 19.15.17.11 NMAC		
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers		
Signed in compliance with 19.15.3.103 NMAC		
A. <u>Closed-loop Systems Permit Application Attachment Checklist</u> : Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. M Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC M Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC		
Closure Plan (Please complete Box 5) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC		
Previously Approved Design (attach copy of design) API Number:		
Previously Approved Operating and Maintenance Plan API Number:		
5. <u>Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only</u> : (19.15.17.13.D NMAC) Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.		
Disposal Facility Name:	Disposal Facility Permit Number: <u>R-9166</u>	
Disposal Facility Name:	Disposal Facility Permit Number:	
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that <i>will not</i> be used for future service and operations? Yes (If yes, please provide the information below) No		
Required for impacted areas which will not be used for future service and operation Soil Backfill and Cover Design Specifications based upon the appropria Re-vegetation Plan - based upon the appropriate requirements of Subsectio Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsections	te requirements of Subsection H of 19.15.17.13 NMAC n I of 19.15.17.13 NMAC	
6. Operator Application Certification:		
I hereby certify that the information submitted with this application is true, accur	ate and complete to the best of my knowledge and belief.	
Name (Print): Chloe Alexander	Title: Regulatory Admin Assistant	
Signature: Childle all Kanch	Date:	
e-mail address: <u>cdalexander@cimarex.com</u>	Telephone: <u>432-620-1938</u>	
Form C-144 CLEZ Oil Conservation		
	APR 0 4 2013	

•

7.		
OCD Approval: Permit Application (including closure plan) Closure Plan (only)		
OCD Representative Signature:	Approval Date: O4/04/13	
Title: Petroleum Engineer	OCD Permit Number: 1 25785	
8. Closure Report (required within 60 days of closure completion): Subsection	n K of 19 15 17 13 NMAC	
Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report.		
The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.		
	Closure Completion Date:	
9. <u>Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:</u> Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.		
Disposal Facility Name:	Disposal Facility Permit Number:	
Disposal Facility Name:		
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations? Yes (If yes, please demonstrate compliance to the items below) No		
Required for impacted areas which will not be used for future service and operations: Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique		
10. Operator Closure Certification:		
I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.		
Name (Print):	Title:	
Signature:		
e-mail address:	Telephone:	

Cimarex Energy Co. of Colorado – Closed-Loop System Design Plan

Equipment List

- Primary Shakers
- Mud Cleaner hydro-cyclones
- 1 or 2 Centrifuges (depending on well depth)
- De-watering system with pH adjustment, coagulant mixing and dosing, and polymer mixing and dosing (may not be necessary for shallower wells)
- Drying Augur
- Sump Drying Augur
- Sump
- Cuttings Boxes
- Reserve Fluids Tank Farm
- Wire Mesh Trash Enclosure (spent motor oils kept in separate containers and later sent to approved landfill)

Operation and Maintenance

The Cimarex Zero Discharge system is designed to maintain drill solids at or below 5%. The equipment is arranged to progressively remove solids from the largest to the smallest size. Drilling fluids can thus be reused and savings is realized on mud and disposal costs. Dewatering may be required with the centrifuges to insure removal of ultra fine solids.

The drilling location is constructed to allow storm water to flow to a central sump normally the cellar. This ensures no contamination leaves the drilling pad in the event of a spill. Storm water is reused in the mud system or stored in a reserve fluid tank farm until it can be reused. All lubricants, oils, or chemicals are removed immediately from the ground to prevent the contamination of storm water. An oil trap is normally installed on the sump if an oil spill occurs during a storm.


A tank farm is utilized to store drilling fluids including fresh water and brine fluids. The tank farm is constructed on a 20 ml plastic lined, bermed pad to prevent the contamination of the drilling site during a spill. Fluids from other sites may be stored in these tanks for processing by the solids control equipment and reused in the mud system. At the end of the well the fluids are transported from the tank farm to an adjoining well or to the next well for the rig.

These closed loop operations can be monitored by our service technicians. Daily logs are maintained to ensure optimal equipment operation and maintenance. Screen and chemical use is logged to maintain inventory control. Fluid properties are monitored and recorded and drilling mud volumes are accounted for in the mud storage farm. This data is kept for end of well review to insure performance goals are met. Lessons learned are logged and used to help with continuous improvement.

Spill prevention is accomplished by maintaining pump packing, hoses, and pipe fittings to insure no leaks are occurring. During an upset condition the source of the spill is isolated and repaired as soon as it is discovered. Free liquid is removed by a diaphragm pump and returned to the mud system. Loose topsoil may be used to stabilize the spill and the contaminated soil is excavated and placed in the cuttings boxes. After the well is finished and the rig has moved, the entire location is scrapped and tested for all regulated toxic materials. If found they are removed and disposed of per regulatory requirements.

<u>Closure Plan</u>

During drilling operations, all liquids, drilling fluids, and cuttings will be hauled off via CRI (Controlled Recovery Incorporated, Permit R-9166).

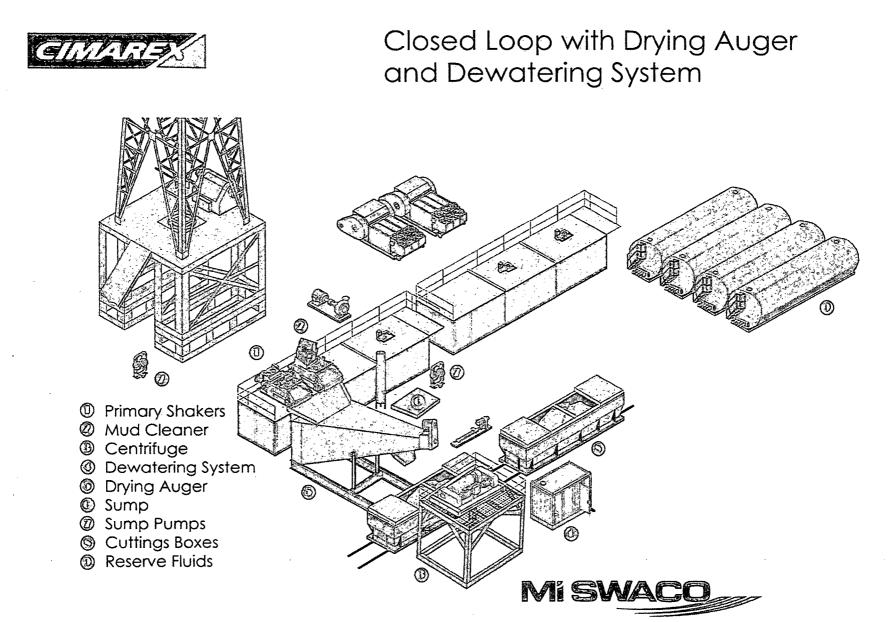

Page 4 of 4.

Oil Conservation Division

Form C-144 CLEZ