District 1 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87460 O 2013

State of New Mexico Energy Minerals and Natural Resources Department

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe. NM 87505 Form C-144 CLEZ Revised August 1, 2011

For closed-loop systems that only use above ground steel tanks or haul-off bins and propose to implement waste removal for closure, submit to the appropriate NMOCD District Office.

Santa Fe, NM 87505
Closedel Webp System Permit or Closure Plan Application (that only use above ground steel tanks or haul-off bins and propose to implement the operator of the procedure of the propose of the propose to implement the operator of the procedure of the propose of th
Operator: Conocor minips Company 21/61/
Address: P.O. Box 51810 Midland, TX 79710-1810
Facility or well name: MCA Unit #456 API Number: 30-025- 41392 OCD Permit Number: FOR RECORD OF STATE OCD Permit Number: FOR RECORD OF STATE OCD Permit Number: STATE OF S
U/L or Qtr/Qtr E Section 26 Township 17S Range 32E County: Lea
Center of Proposed Design: Latitude32 48' 28.12"N Longitude103 44' 39.32" NAD: ▼1927 □ 1983
Surface Owner: X Federal State Tribal Trust or Indian Allotment
Z Closed-loop System: Subsection H of 19.15.17.11 NMAC Operation: ☑ Drilling a new well ☐ Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) ☐ P&A ☑ Above Ground Steel Tanks or ☑ Haul-off Bins 3.
Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.16.8 NMAC
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. □ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC □ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC □ Closure Plan (Please complete Box 5) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC □ Previously Approved Design (attach copy of design) API Number: □ Previously Approved Operating and Maintenance Plan API Number:
5.
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC) Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.
Disposal Facility Name: Controlled Recovery; R360 Disposal Facility Permit Number: R9166
Disposal Facility Name: Disposal Facility Permit Number:
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations? Yes (If yes, please provide the information below)
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC
s. Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print): Susan B. Maunder Title: Senior Regulatory Specialist

Signature:

Date:

Telephone: <u>(432)688-6913</u>

7. OCD Approval: Permit Application (including closure plan) Closure P	lan (only)
OCD Representative Signature:	OCD Permit Number: FOR RECORD NAME OF THE PROPERTY OF THE PROP
Title:	OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection Instructions: Operators are required to obtain an approved closure plan prior of The closure report is required to be submitted to the division within 60 days of the section of the form until an approved closure plan has been obtained and the closure plan plan has been obtained and the closure plan plan plan plan plan plan plan plan	to implementing any closure activities and submitting the closure report. The completion of the closure activities. Please do not complete this
9. <u>Closure Report Regarding Waste Removal Closure For Closed-loop Systems</u> Instructions: Please indentify the facility or facilities for where the liquids, dril two facilities were utilized.	
Disposal Facility Name:	Disposal Facility Permit Number:
Disposal Facility Name:	Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on or Yes (If yes, please demonstrate compliance to the items below)	in areas that will not be used for future service and operations?
Required for impacted areas which will not be used for future service and operation Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	ons:
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure rebelief. I also certify that the closure complies with all applicable closure requirements.	
Name (Print): Susan B. Maunder	Title: Senior Regulatory Specialist
Signature:	Date:
e-mail address: Susan.B.Maunder@conocophillips.com	Telephone: (432)688-6913

ConocoPhillips


Location Schematic and Rig Layout for Closed Loop System

(PICTURE NOT TO SCALE)

Drawn by: James Chen

Drilling Engineer, ConocoPhillips Company
Date: 12-November-2012 (updated March 2013)

NOTE: There are two muster areas (primary & scondary) depending on the prevailing wind direction. The muster area that is furthest upwind/crosswind will be the designated area for briefing and assessing the situation. In the situation that a full evacuation is deemed necessary, all personnel will exit the location on the main access road. Otherwise, if the main access road is blocked off, they will exit on the secondary road or walk off road in the upwind/crosswind direction.

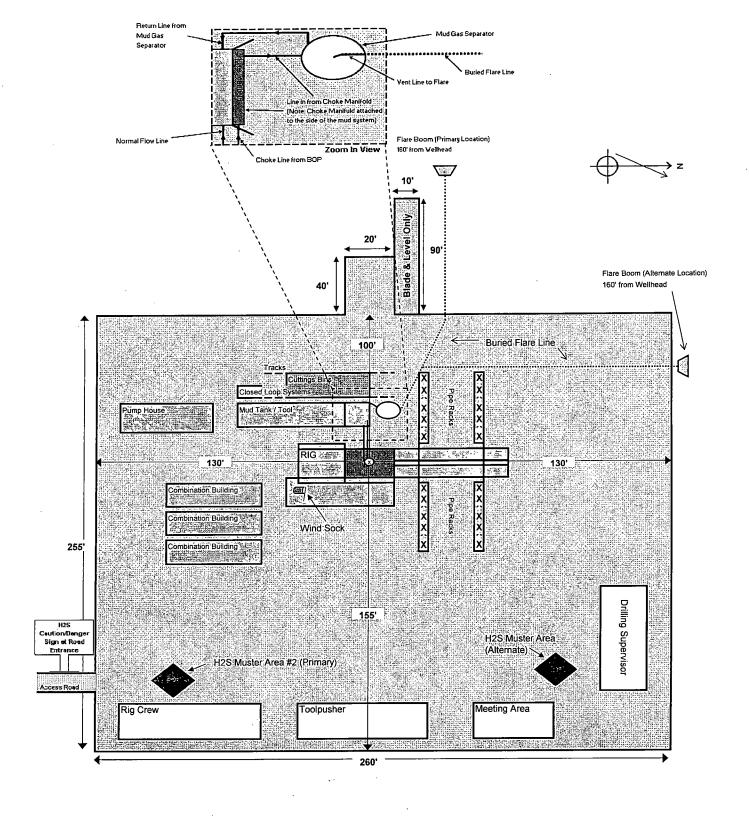

Closed Loop System Design, Operating and Maintenance, and Closure Plan

ConocoPhillips Company Well: MCA Unit #456

Location: Sec. 26, T17S, R32E

Date: 04-19-2013

ConocoPhillips proposes the following plan for design, operating and maintenance, and closure of our proposed closed loop system for the above named well:

1. We propose to use a closed loop system with steel pits, haul-off bins, and frac tanks for containing all cuttings, solids, mud, water, brine, and liquids. We will not dig a pit, nor will we use a drying pad, nor will we build an earth pit above ground level, nor will we dispose of or bury any waste on location.

All drilling waste and all drilling fluids (fresh water, brine, mud, cuttings, drill solids, cement returns, and any other liquid or solid that may be involved) will be contained on location in the rig's steel pits or in hauloff bins or in frac tanks as needed. The intent is as follows:

- We propose to use the rigs' steel pits for containing and maintaining the drilling fluids.
- We propose to remove cuttings and drilled solids from the mud by using solids control equipment and to contain such cuttings and drilled solids on location in haul-off bins.
- We propose that any excess water that may need to be stored on location will be stored in tanks.

The closed loop system components will be inspected daily by each tour and any need repairs will be made immediately. Any leak in the system will be repaired immediately, and any spilled liquids and/or solids will be cleaned immediately, and the area where any such spill occurred will be remediated immediately.

2. Cuttings and solids will be removed from location in haul-off bins by an authorized contractor and disposed of at an authorized facility. For this well, we propose the following disposal facility:

R-360 Inc.

4507 West Carlsbad Hwy, Hobbs, NM 88240, P.O. Box 388; Hobbs, New Mexico 88241

Toll Free Phone: 877.505.4274. Local Phone Number: 432.638.4076

The physical address for the plant where the disposal facility is located is Highway 62/180 at mile marker 66 (33 miles East of Hobbs, NM and 32 miles West of Carlsbad, NM).

The Permit Number for R-360 is NM-01-0006.

A photograph showing the type of haul-off bins that will be used is attached.

- 3. Mud will be transported by vacuum truck and disposed of at R-360 Inc. at the facility described above.
- 4. Fresh Water and Brine will be hauled off by vacuum truck and disposed of at an authorized salt water disposal well. We propose the following for disposal of fresh water and brine as needed:
 - Nabors Well Services Company, 3221 NW County Rd; Hobbs, NM 88240, PO 5208 Hobbs, NM, 88241, Permit SWD 092. (Well Location: Section 3, T19S R37E)
 - Basic Energy Services, P.O. Box 1869; Eunice, NM 88231 Phone Number: 575.394.2545, Facility located at Hwy 18, Mile Marker 19; Eunice, NM.

James Chen Drilling Engineer Office: 832.486.2184 Cell: 832.678.1647

SPECIFICATIONS

Heavy Duty Split Metal Rolling Lid

FLOOR: 3/16" PL one piece CROSS MEMBER: 3 x 4.1 channel 16" on

center
WALLS: 3/16' PL solid welded with Jubing top, insi de liner hooks
DOOR: 3/16' PL with Jubing frame.
ERONT: 3/16' PL slant formed.
PICK UP: Standard cable with 2' x 6' x 1/4' rails, gu sset at each crossmember.
WHEELS: 10 DIA x 9 long with reaselfittings.
DOOR LATCH: 3 lindependent ratcher binders with chains, vertical second latch.
GASKETS: Extruded rubber seal with metal. retainers.

retainers WELDS:: All welds:continuous except sub

WELDS:: All welds conlinuous except substructure crossmembers

EINISH:: Coated inside and out with direction metal rust inhibiting acrylic enamel color soat HYDR©TESTING: Euli capacity staticites DIMENSIONS: 22-11 long (21-8) inside).

99 Avide (88 inside) see drawing to ineight OPTIONS: Steel gridblash and special paint. Amplinolly Hell and Dino; pickup ROOF: 3/16 PL roof panels with tubing and channel support rame.


LIDS: (2) 68" x 90" metal rolling lids spring loaded self-raising ROLLERS: 4" V-groove rollers with delring bearings and grease fittings

OPENING: (2) 60" x 82" openings with 8" divider centered on

container

LATCH:(2) independent ratchet binders with chains

perilid GASK⊟IS: Extruded rubber seal with metal retainers

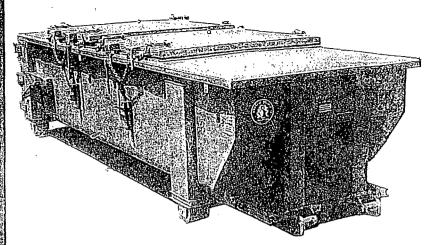

CONT.	Α	В
20 YD	41	53
25 YD	53	65
30 YD	65	77

