

# PECOS DISTRICT SURFACE USE CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Caza Operating LLC
LEASE NO.:	NMNM132945
WELL NAME & NO.:	Eagleclaw Federal 2H
SURFACE HOLE FOOTAGE:	190'/N & 2173'/W
BOTTOM HOLE FOOTAGE:	1675'/S & 2221'/W
LOCATION:	Section 5, T.20 S., R.35 E., NMPM
COUNTY:	Lea County, New Mexico

## TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
  - Lesser Prairie-Chicken Timing Stipulations
  - Below Ground-level Abandoned Well Marker
- ☐ **Construction**
  - Notification
  - Topsoil
  - Closed Loop System
  - Federal Mineral Material Pits
  - Well Pads
  - Roads
- ☐ **Road Section Diagram**
- ☐ **Production (Post Drilling)**
  - Well Structures & Facilities
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

## **I. GENERAL PROVISIONS**

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

## **II. PERMIT EXPIRATION**

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

## **III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES**

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

## **IV. NOXIOUS WEEDS**

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

## V. SPECIAL REQUIREMENT(S)

### **Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:**

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

**Below Ground-level Abandoned Well Marker to avoid raptor perching:** Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.



## **VI. CONSTRUCTION**

### **A. NOTIFICATION**

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

### **B. TOPSOIL**

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

### **C. CLOSED LOOP SYSTEM**

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

### **D. FEDERAL MINERAL MATERIALS PIT**

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

### **E. WELL PAD SURFACING**

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

### **F. EXCLOSURE FENCING (CELLARS & PITS)**



**Exclosure Fencing**

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

**G. ON LEASE ACCESS ROADS****Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

**Surfacing**

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

**Crowning**

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

**Ditching**

Ditching shall be required on both sides of the road.

**Turnouts**


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

**Drainage**

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

#### **Cross Section of a Typical Lead-off Ditch**

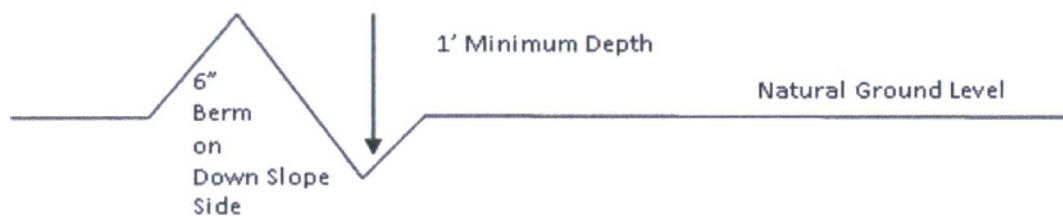

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

#### **Formula for Spacing Interval of Lead-off Ditches**

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

#### **Cattle guards**

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

#### **Fence Requirement**

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

#### **Public Access**

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

### Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

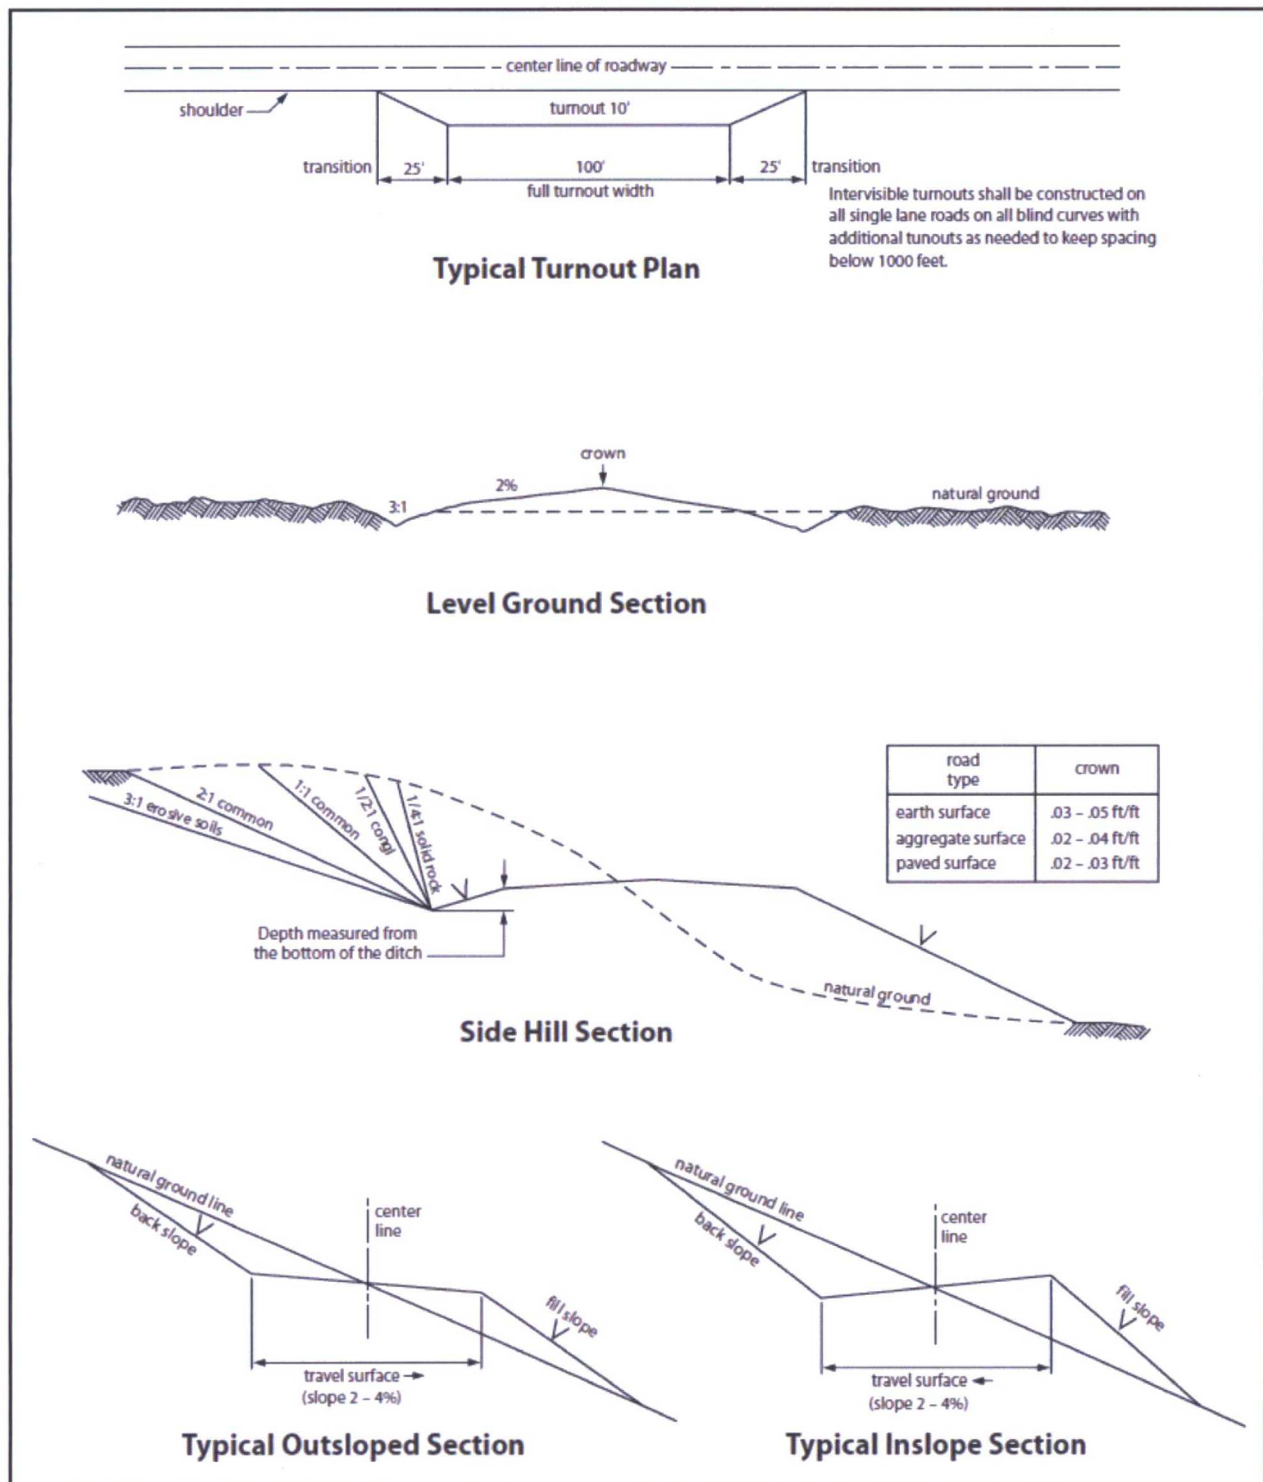


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.



## **VII. PRODUCTION (POST DRILLING)**

### **A. WELL STRUCTURES & FACILITIES**

#### **Placement of Production Facilities**

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

#### **Exclosure Netting (Open-top Tanks)**

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

#### **Chemical and Fuel Secondary Containment and Exclosure Screening**

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

#### **Open-Vent Exhaust Stack Exclosures**

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

#### **Containment Structures**

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

#### **Painting Requirement**

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

### **VIII. INTERIM RECLAMATION**

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

### **IX. FINAL ABANDONMENT & RECLAMATION**

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Below Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.



## Seed Mixture for LPC Sand/Shinnery Sites

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)\* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed shall be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. Seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed\* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains Bristlegrass	5lbs/A
Sand Bluestem	5lbs/A
Little Bluestem	3lbs/A
Big Bluestem	6lbs/A
Plains Coreopsis	2lbs/A
Sand Dropseed	1lbs/A

\*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

Project: Eagleclaw  
Site: Eagleclaw Federal 2H  
Well: Eagleclaw Federal 2H  
Wellbore: Eagleclaw Federal 2H  
Design: Eagleclaw Federal 2H





Azimuths to Grid North  
True North:  $-0.46^{\circ}$   
Magnetic North:  $6.31^{\circ}$

Magnetic Field  
Strength: 48206.8snT  
Dip Angle:  $60.39^{\circ}$   
Date: 12/01/2017  
Model: IGRF2010

#### REFERENCE INFORMATION

Co-ordinate (N/E) Reference: Well Eagleclaw Federal 2H, Grid North  
Vertical (TVD) Reference: WELL @ 3719.0usft (Original Well Elev)  
Section (VS) Reference: Slot - (0.0N, 0.0E)  
Measured Depth Reference: WELL @ 3719.0usft (Original Well Elev)  
Calculation Method: Minimum Curvature

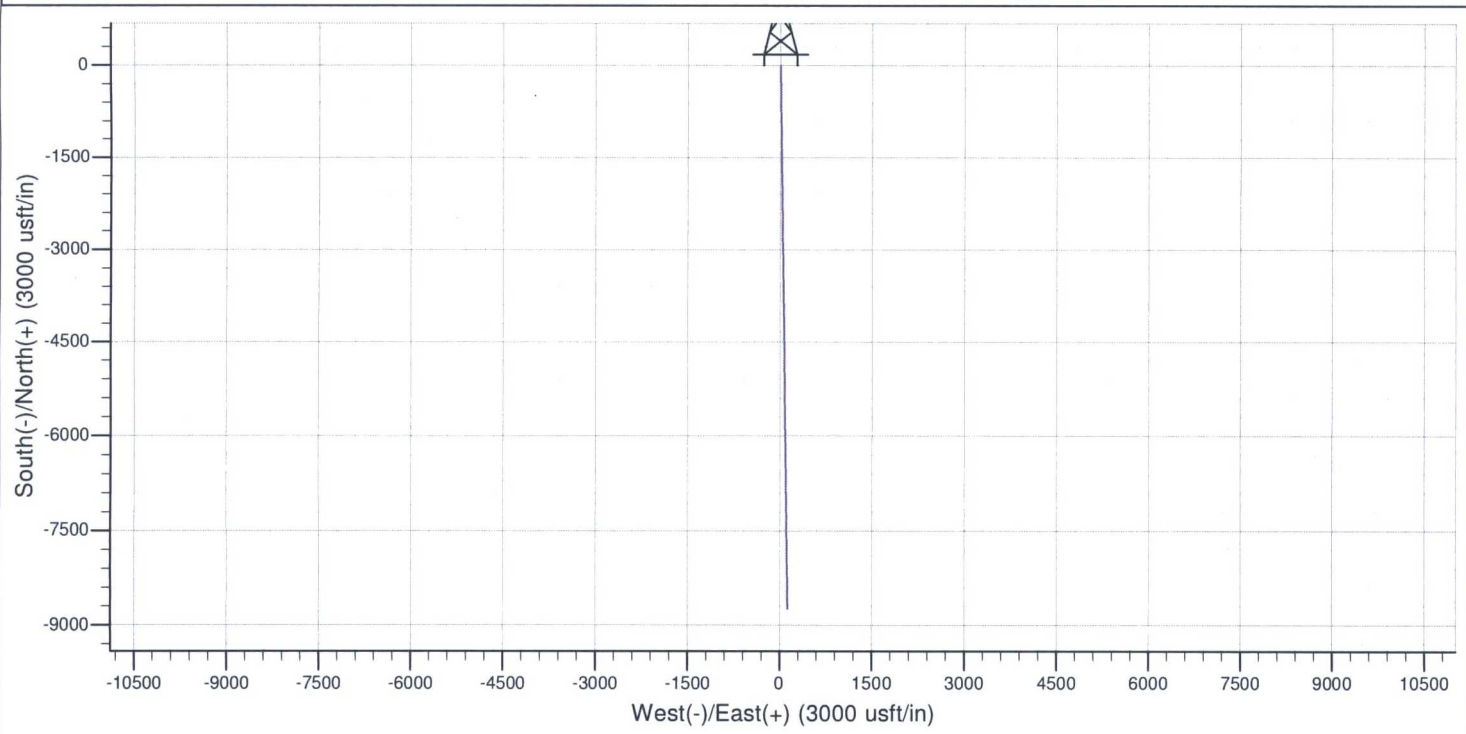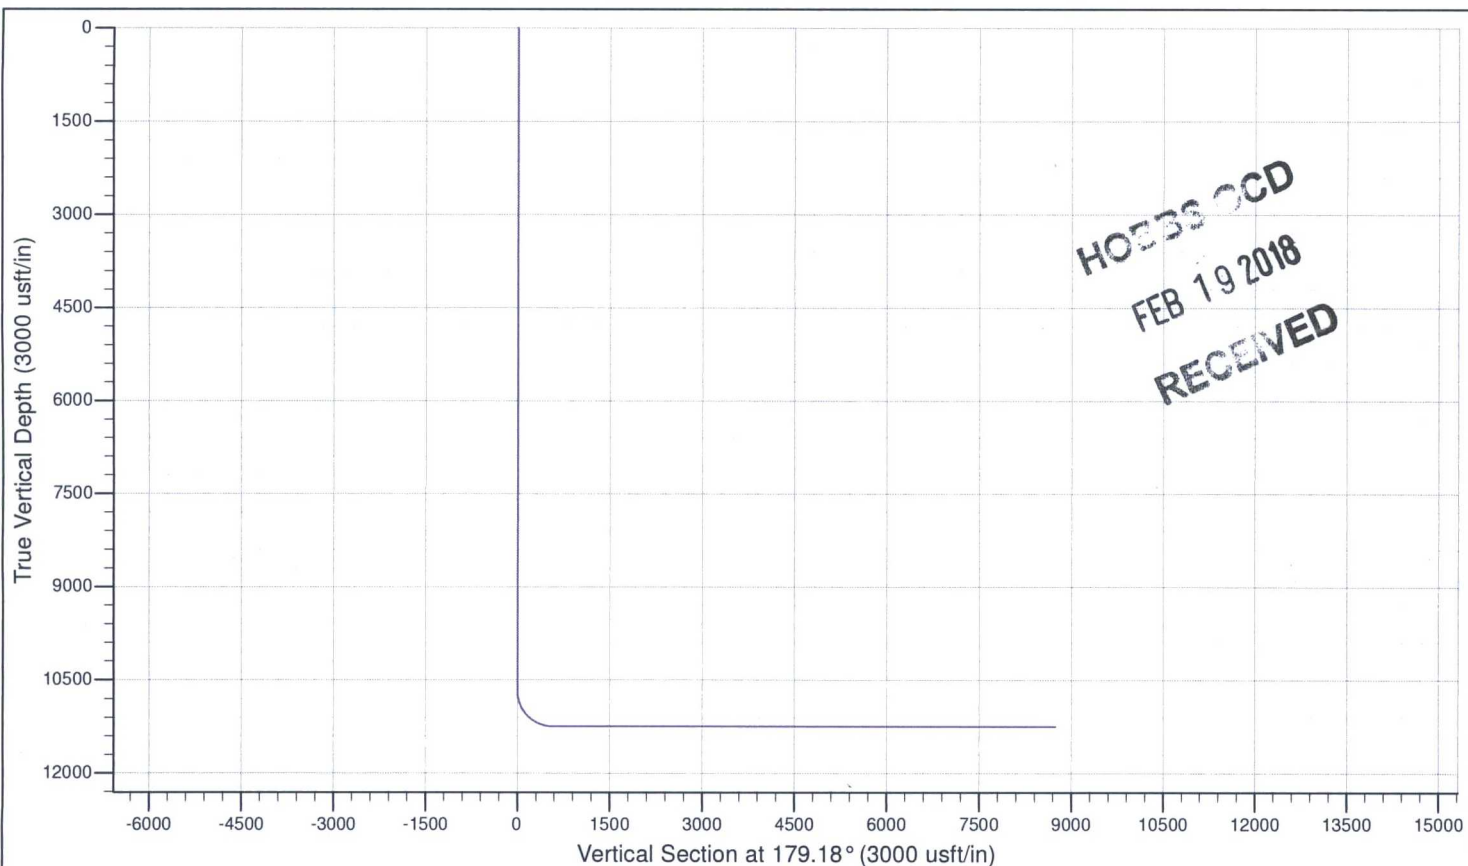

# Caza

Eagleclaw

Eagleclaw Federal 2H

Eagleclaw Federal 2H

Eagleclaw Federal 2H

Plan: Eagleclaw Federal 2H

## MOJO Standard Well Plan

01 December, 2017

HOZES OCD  
FEB 19 2018  
RECEIVED



MOJO Standard Well Plan

<b>Company:</b>	Caza	<b>Local Co-ordinate Reference:</b>	Well Eagleclaw Federal 2H
<b>Project:</b>	Eagleclaw	<b>TVD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Site:</b>	Eagleclaw Federal 2H	<b>MD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Well:</b>	Eagleclaw Federal 2H	<b>North Reference:</b>	Grid
<b>Wellbore:</b>	Eagleclaw Federal 2H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Eagleclaw Federal 2H	<b>Database:</b>	EDM 5000.1 Single User Db

Project		Eagleclaw	
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Eagleclaw Federal 2H			
Site Position:		Northing:		Latitude:	
From:	Lat/Long	Easting:	586,362.83 usft	32° 36' 32.656 N	
Position Uncertainty:	1.0 usft	Slot Radius:	803,788.33 usft	Longitude:	103° 28' 51.658 W
			17-1/2 "	Grid Convergence:	0.46 °

Well							Eagleclaw Federal 2H						
Well Position	+N/-S	0.0 usft	Northing:	586,362.83 usft	Latitude:	32° 36' 32.656 N							
	+E/-W	0.0 usft	Easting:	803,788.33 usft	Longitude:	103° 28' 51.658 W							
Position Uncertainty		1.0 usft	Wellhead Elevation:	usft	Ground Level:	3,694.0 usft							

Wellbore	Eagleclaw Federal 2H				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	12/01/17	6.77	60.39	48,207

Design	Eagleclaw Federal 2H			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	179.18

Survey Tool Program		Date	12/01/17		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
0.0	19,748.0	Eagleclaw Federal 2H (Eagleclaw Federal			

# MOJO Standard Well Plan

<b>Company:</b>	Caza	<b>Local Co-ordinate Reference:</b>	Well Eagleclaw Federal 2H
<b>Project:</b>	Eagleclaw	<b>TVD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Site:</b>	Eagleclaw Federal 2H	<b>MD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Well:</b>	Eagleclaw Federal 2H	<b>North Reference:</b>	Grid
<b>Wellbore:</b>	Eagleclaw Federal 2H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Eagleclaw Federal 2H	<b>Database:</b>	EDM 5000.1 Single User Db

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	V. Sec (usft)	Northing (usft)	Easting (usft)	
0.0	0.00	0.00	0.0	-3,719.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
100.0	0.00	0.00	100.0	-3,619.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
200.0	0.00	179.18	200.0	-3,519.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
300.0	0.00	179.18	300.0	-3,419.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
400.0	0.00	179.18	400.0	-3,319.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
500.0	0.00	179.18	500.0	-3,219.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
600.0	0.00	179.18	600.0	-3,119.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
700.0	0.00	179.18	700.0	-3,019.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
800.0	0.00	179.18	800.0	-2,919.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
900.0	0.00	179.18	900.0	-2,819.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
1,000.0	0.00	179.18	1,000.0	-2,719.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
1,100.0	0.00	179.18	1,100.0	-2,619.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
1,200.0	0.00	179.18	1,200.0	-2,519.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
1,300.0	0.00	179.18	1,300.0	-2,419.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
1,400.0	0.00	179.18	1,400.0	-2,319.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
1,500.0	0.00	179.18	1,500.0	-2,219.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
1,600.0	0.00	179.18	1,600.0	-2,119.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
1,700.0	0.00	179.18	1,700.0	-2,019.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
1,800.0	0.00	179.18	1,800.0	-1,919.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
1,900.0	0.00	179.18	1,900.0	-1,819.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
2,000.0	0.00	179.18	2,000.0	-1,719.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
2,100.0	0.00	179.18	2,100.0	-1,619.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
2,200.0	0.00	179.18	2,200.0	-1,519.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
2,300.0	0.00	179.18	2,300.0	-1,419.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
2,400.0	0.00	179.18	2,400.0	-1,319.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
2,500.0	0.00	179.18	2,500.0	-1,219.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
2,600.0	0.00	179.18	2,600.0	-1,119.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	



MOJO Standard Well Plan

<b>Company:</b>	Caza	<b>Local Co-ordinate Reference:</b>	Well Eagleclaw Federal 2H
<b>Project:</b>	Eagleclaw	<b>TVD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Site:</b>	Eagleclaw Federal 2H	<b>MD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Well:</b>	Eagleclaw Federal 2H	<b>North Reference:</b>	Grid
<b>Wellbore:</b>	Eagleclaw Federal 2H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Eagleclaw Federal 2H	<b>Database:</b>	EDM 5000.1 Single User Db

Planned Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	V. Sec (usft)	Northing (usft)	Easting (usft)
2,700.0	0.00	179.18	2,700.0	-1,019.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
2,800.0	0.00	179.18	2,800.0	-919.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
2,900.0	0.00	179.18	2,900.0	-819.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
3,000.0	0.00	179.18	3,000.0	-719.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
3,100.0	0.00	179.18	3,100.0	-619.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
3,200.0	0.00	179.18	3,200.0	-519.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
3,300.0	0.00	179.18	3,300.0	-419.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
3,400.0	0.00	179.18	3,400.0	-319.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
3,500.0	0.00	179.18	3,500.0	-219.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
3,600.0	0.00	179.18	3,600.0	-119.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
3,700.0	0.00	179.18	3,700.0	-19.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
3,800.0	0.00	179.18	3,800.0	81.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
3,900.0	0.00	179.18	3,900.0	181.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
4,000.0	0.00	179.18	4,000.0	281.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
4,100.0	0.00	179.18	4,100.0	381.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
4,200.0	0.00	179.18	4,200.0	481.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
4,300.0	0.00	179.18	4,300.0	581.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
4,400.0	0.00	179.18	4,400.0	681.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
4,500.0	0.00	179.18	4,500.0	781.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
4,600.0	0.00	179.18	4,600.0	881.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
4,700.0	0.00	179.18	4,700.0	981.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
4,800.0	0.00	179.18	4,800.0	1,081.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
4,900.0	0.00	179.18	4,900.0	1,181.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
5,000.0	0.00	179.18	5,000.0	1,281.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
5,100.0	0.00	179.18	5,100.0	1,381.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
5,200.0	0.00	179.18	5,200.0	1,481.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
5,300.0	0.00	179.18	5,300.0	1,581.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33



# MOJO Standard Well Plan

<b>Company:</b>	Caza	<b>Local Co-ordinate Reference:</b>	Well Eagleclaw Federal 2H
<b>Project:</b>	Eagleclaw	<b>TVD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Site:</b>	Eagleclaw Federal 2H	<b>MD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Well:</b>	Eagleclaw Federal 2H	<b>North Reference:</b>	Grid
<b>Wellbore:</b>	Eagleclaw Federal 2H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Eagleclaw Federal 2H	<b>Database:</b>	EDM 5000.1 Single User Db

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	V. Sec (usft)	Northing (usft)	Easting (usft)	
5,400.0	0.00	179.18	5,400.0	1,681.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
5,500.0	0.00	179.18	5,500.0	1,781.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
5,600.0	0.00	179.18	5,600.0	1,881.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
5,700.0	0.00	179.18	5,700.0	1,981.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
5,800.0	0.00	179.18	5,800.0	2,081.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
5,900.0	0.00	179.18	5,900.0	2,181.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
6,000.0	0.00	179.18	6,000.0	2,281.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
6,100.0	0.00	179.18	6,100.0	2,381.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
6,200.0	0.00	179.18	6,200.0	2,481.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
6,300.0	0.00	179.18	6,300.0	2,581.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
6,400.0	0.00	179.18	6,400.0	2,681.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
6,500.0	0.00	179.18	6,500.0	2,781.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
6,600.0	0.00	179.18	6,600.0	2,881.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
6,700.0	0.00	179.18	6,700.0	2,981.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
6,800.0	0.00	179.18	6,800.0	3,081.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
6,900.0	0.00	179.18	6,900.0	3,181.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
7,000.0	0.00	179.18	7,000.0	3,281.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
7,100.0	0.00	179.18	7,100.0	3,381.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
7,200.0	0.00	179.18	7,200.0	3,481.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
7,300.0	0.00	179.18	7,300.0	3,581.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
7,400.0	0.00	179.18	7,400.0	3,681.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
7,500.0	0.00	179.18	7,500.0	3,781.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
7,600.0	0.00	179.18	7,600.0	3,881.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
7,700.0	0.00	179.18	7,700.0	3,981.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
7,800.0	0.00	179.18	7,800.0	4,081.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
7,900.0	0.00	179.18	7,900.0	4,181.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
8,000.0	0.00	179.18	8,000.0	4,281.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	

# MOJO Standard Well Plan

<b>Company:</b>	Caza	<b>Local Co-ordinate Reference:</b>	Well Eagleclaw Federal 2H
<b>Project:</b>	Eagleclaw	<b>TVD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Site:</b>	Eagleclaw Federal 2H	<b>MD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Well:</b>	Eagleclaw Federal 2H	<b>North Reference:</b>	Grid
<b>Wellbore:</b>	Eagleclaw Federal 2H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Eagleclaw Federal 2H	<b>Database:</b>	EDM 5000.1 Single User Db

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	V. Sec (usft)	Northing (usft)	Easting (usft)	
8,100.0	0.00	179.18	8,100.0	4,381.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
8,200.0	0.00	179.18	8,200.0	4,481.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
8,300.0	0.00	179.18	8,300.0	4,581.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
8,400.0	0.00	179.18	8,400.0	4,681.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
8,500.0	0.00	179.18	8,500.0	4,781.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
8,600.0	0.00	179.18	8,600.0	4,881.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
8,700.0	0.00	179.18	8,700.0	4,981.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
8,800.0	0.00	179.18	8,800.0	5,081.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
8,900.0	0.00	179.18	8,900.0	5,181.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
9,000.0	0.00	179.18	9,000.0	5,281.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
9,100.0	0.00	179.18	9,100.0	5,381.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
9,200.0	0.00	179.18	9,200.0	5,481.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
9,300.0	0.00	179.18	9,300.0	5,581.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
9,400.0	0.00	179.18	9,400.0	5,681.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
9,500.0	0.00	179.18	9,500.0	5,781.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
9,600.0	0.00	179.18	9,600.0	5,881.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
9,700.0	0.00	179.18	9,700.0	5,981.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
9,800.0	0.00	179.18	9,800.0	6,081.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
9,900.0	0.00	179.18	9,900.0	6,181.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
10,000.0	0.00	179.18	10,000.0	6,281.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
10,100.0	0.00	179.18	10,100.0	6,381.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
10,200.0	0.00	179.18	10,200.0	6,481.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
10,300.0	0.00	179.18	10,300.0	6,581.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
10,400.0	0.00	179.18	10,400.0	6,681.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
10,500.0	0.00	179.18	10,500.0	6,781.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	
10,600.0	0.00	179.18	10,600.0	6,881.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33	



MOJO Standard Well Plan

Company:	Caza	Local Co-ordinate Reference:	Well Eagleclaw Federal 2H
Project:	Eagleclaw	TVD Reference:	WELL @ 3719.0usft (Original Well Elev)
Site:	Eagleclaw Federal 2H	MD Reference:	WELL @ 3719.0usft (Original Well Elev)
Well:	Eagleclaw Federal 2H	North Reference:	Grid
Wellbore:	Eagleclaw Federal 2H	Survey Calculation Method:	Minimum Curvature
Design:	Eagleclaw Federal 2H	Database:	EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	V. Sec (usft)	Northing (usft)	Easting (usft)
10,677.0	0.00	179.18	10,677.0	6,958.0	0.0	0.0	0.00	0.0	586,362.83	803,788.33
<b>Start Build 10.00</b>										
10,700.0	2.30	179.18	10,700.0	6,981.0	-0.5	0.0	10.00	0.5	586,362.37	803,788.34
10,800.0	12.30	179.18	10,799.0	7,080.0	-13.1	0.2	10.00	13.1	586,349.68	803,788.52
10,900.0	22.30	179.18	10,894.4	7,175.4	-42.8	0.6	10.00	42.8	586,319.99	803,788.95
11,000.0	32.30	179.18	10,983.1	7,264.1	-88.6	1.3	10.00	88.6	586,274.19	803,789.60
11,100.0	42.30	179.18	11,062.6	7,343.6	-149.2	2.1	10.00	149.2	586,213.68	803,790.47
11,200.0	52.30	179.18	11,130.3	7,411.3	-222.5	3.2	10.00	222.6	586,140.29	803,791.52
11,300.0	62.30	179.18	11,184.3	7,465.3	-306.6	4.4	10.00	306.6	586,056.26	803,792.72
11,400.0	72.30	179.18	11,222.8	7,503.8	-398.7	5.7	10.00	398.7	585,964.13	803,794.04
11,500.0	82.30	179.18	11,244.8	7,525.8	-496.1	7.1	10.00	496.2	585,866.71	803,795.43
11,577.0	90.00	179.18	11,250.0	7,531.0	-572.9	8.2	10.00	573.0	585,789.93	803,796.53
<b>Start 8171.0 hold at 11577.0 MD</b>										
11,600.0	90.00	179.18	11,250.0	7,531.0	-595.9	8.5	0.00	595.9	585,766.95	803,796.86
11,700.0	90.00	179.18	11,250.0	7,531.0	-695.9	10.0	0.00	695.9	585,666.96	803,798.29
11,800.0	90.00	179.18	11,250.0	7,531.0	-795.9	11.4	0.00	795.9	585,566.97	803,799.72
11,900.0	90.00	179.18	11,250.0	7,531.0	-895.8	12.8	0.00	895.9	585,466.98	803,801.16
12,000.0	90.00	179.18	11,250.0	7,531.0	-995.8	14.3	0.00	995.9	585,366.99	803,802.59
12,100.0	90.00	179.18	11,250.0	7,531.0	-1,095.8	15.7	0.00	1,095.9	585,267.01	803,804.02
12,200.0	90.00	179.18	11,250.0	7,531.0	-1,195.8	17.1	0.00	1,195.9	585,167.02	803,805.45
12,300.0	90.00	179.18	11,250.0	7,531.0	-1,295.8	18.5	0.00	1,295.9	585,067.03	803,806.88
12,400.0	90.00	179.18	11,250.0	7,531.0	-1,395.8	20.0	0.00	1,395.9	584,967.04	803,808.31
12,500.0	90.00	179.18	11,250.0	7,531.0	-1,495.8	21.4	0.00	1,495.9	584,867.05	803,809.74
12,600.0	90.00	179.18	11,250.0	7,531.0	-1,595.8	22.8	0.00	1,595.9	584,767.06	803,811.17
12,700.0	90.00	179.18	11,250.0	7,531.0	-1,695.8	24.3	0.00	1,695.9	584,667.07	803,812.60
12,800.0	90.00	179.18	11,250.0	7,531.0	-1,795.7	25.7	0.00	1,795.9	584,567.08	803,814.04
12,900.0	90.00	179.18	11,250.0	7,531.0	-1,895.7	27.1	0.00	1,895.9	584,467.09	803,815.47



# MOJO Standard Well Plan

<b>Company:</b>	Caza	<b>Local Co-ordinate Reference:</b>	Well Eagleclaw Federal 2H
<b>Project:</b>	Eagleclaw	<b>TVD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Site:</b>	Eagleclaw Federal 2H	<b>MD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Well:</b>	Eagleclaw Federal 2H	<b>North Reference:</b>	Grid
<b>Wellbore:</b>	Eagleclaw Federal 2H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Eagleclaw Federal 2H	<b>Database:</b>	EDM 5000.1 Single User Db

Planned Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	V. Sec (usft)	Northing (usft)	Easting (usft)
13,000.0	90.00	179.18	11,250.0	7,531.0	-1,995.7	28.6	0.00	1,995.9	584,367.10	803,816.90
13,100.0	90.00	179.18	11,250.0	7,531.0	-2,095.7	30.0	0.00	2,095.9	584,267.11	803,818.33
13,200.0	90.00	179.18	11,250.0	7,531.0	-2,195.7	31.4	0.00	2,195.9	584,167.12	803,819.76
13,300.0	90.00	179.18	11,250.0	7,531.0	-2,295.7	32.9	0.00	2,295.9	584,067.13	803,821.19
13,400.0	90.00	179.18	11,250.0	7,531.0	-2,395.7	34.3	0.00	2,395.9	583,967.14	803,822.62
13,500.0	90.00	179.18	11,250.0	7,531.0	-2,495.7	35.7	0.00	2,495.9	583,867.15	803,824.05
13,600.0	90.00	179.18	11,250.0	7,531.0	-2,595.7	37.2	0.00	2,595.9	583,767.16	803,825.49
13,700.0	90.00	179.18	11,250.0	7,531.0	-2,695.7	38.6	0.00	2,695.9	583,667.17	803,826.92
13,800.0	90.00	179.18	11,250.0	7,531.0	-2,795.6	40.0	0.00	2,795.9	583,567.18	803,828.35
13,900.0	90.00	179.18	11,250.0	7,531.0	-2,895.6	41.4	0.00	2,895.9	583,467.19	803,829.78
14,000.0	90.00	179.18	11,250.0	7,531.0	-2,995.6	42.9	0.00	2,995.9	583,367.20	803,831.21
14,100.0	90.00	179.18	11,250.0	7,531.0	-3,095.6	44.3	0.00	3,095.9	583,267.21	803,832.64
14,200.0	90.00	179.18	11,250.0	7,531.0	-3,195.6	45.7	0.00	3,195.9	583,167.22	803,834.07
14,300.0	90.00	179.18	11,250.0	7,531.0	-3,295.6	47.2	0.00	3,295.9	583,067.24	803,835.50
14,400.0	90.00	179.18	11,250.0	7,531.0	-3,395.6	48.6	0.00	3,395.9	582,967.25	803,836.93
14,500.0	90.00	179.18	11,250.0	7,531.0	-3,495.6	50.0	0.00	3,495.9	582,867.26	803,838.37
14,600.0	90.00	179.18	11,250.0	7,531.0	-3,595.6	51.5	0.00	3,595.9	582,767.27	803,839.80
14,700.0	90.00	179.18	11,250.0	7,531.0	-3,695.5	52.9	0.00	3,695.9	582,667.28	803,841.23
14,800.0	90.00	179.18	11,250.0	7,531.0	-3,795.5	54.3	0.00	3,795.9	582,567.29	803,842.66
14,900.0	90.00	179.18	11,250.0	7,531.0	-3,895.5	55.8	0.00	3,895.9	582,467.30	803,844.09
15,000.0	90.00	179.18	11,250.0	7,531.0	-3,995.5	57.2	0.00	3,995.9	582,367.31	803,845.52
15,100.0	90.00	179.18	11,250.0	7,531.0	-4,095.5	58.6	0.00	4,095.9	582,267.32	803,846.95
15,200.0	90.00	179.18	11,250.0	7,531.0	-4,195.5	60.0	0.00	4,195.9	582,167.33	803,848.38
15,300.0	90.00	179.18	11,250.0	7,531.0	-4,295.5	61.5	0.00	4,295.9	582,067.34	803,849.81
15,400.0	90.00	179.18	11,250.0	7,531.0	-4,395.5	62.9	0.00	4,395.9	581,967.35	803,851.25
15,500.0	90.00	179.18	11,250.0	7,531.0	-4,495.5	64.3	0.00	4,495.9	581,867.36	803,852.68
15,600.0	90.00	179.18	11,250.0	7,531.0	-4,595.5	65.8	0.00	4,595.9	581,767.37	803,854.11

# MOJO Standard Well Plan

Company:	Caza	Local Co-ordinate Reference:	Well Eagleclaw Federal 2H
Project:	Eagleclaw	TVD Reference:	WELL @ 3719.0usft (Original Well Elev)
Site:	Eagleclaw Federal 2H	MD Reference:	WELL @ 3719.0usft (Original Well Elev)
Well:	Eagleclaw Federal 2H	North Reference:	Grid
Wellbore:	Eagleclaw Federal 2H	Survey Calculation Method:	Minimum Curvature
Design:	Eagleclaw Federal 2H	Database:	EDM 5000.1 Single User Db

## Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	V. Sec (usft)	Northing (usft)	Easting (usft)
15,700.0	90.00	179.18	11,250.0	7,531.0	-4,695.4	67.2	0.00	4,695.9	581,667.38	803,855.54
15,800.0	90.00	179.18	11,250.0	7,531.0	-4,795.4	68.6	0.00	4,795.9	581,567.39	803,856.97
15,900.0	90.00	179.18	11,250.0	7,531.0	-4,895.4	70.1	0.00	4,895.9	581,467.40	803,858.40
16,000.0	90.00	179.18	11,250.0	7,531.0	-4,995.4	71.5	0.00	4,995.9	581,367.41	803,859.83
16,100.0	90.00	179.18	11,250.0	7,531.0	-5,095.4	72.9	0.00	5,095.9	581,267.42	803,861.26
16,200.0	90.00	179.18	11,250.0	7,531.0	-5,195.4	74.4	0.00	5,195.9	581,167.43	803,862.69
16,300.0	90.00	179.18	11,250.0	7,531.0	-5,295.4	75.8	0.00	5,295.9	581,067.44	803,864.13
16,400.0	90.00	179.18	11,250.0	7,531.0	-5,395.4	77.2	0.00	5,395.9	580,967.45	803,865.56
16,500.0	90.00	179.18	11,250.0	7,531.0	-5,495.4	78.7	0.00	5,495.9	580,867.46	803,866.99
16,600.0	90.00	179.18	11,250.0	7,531.0	-5,595.4	80.1	0.00	5,595.9	580,767.48	803,868.42
16,700.0	90.00	179.18	11,250.0	7,531.0	-5,695.3	81.5	0.00	5,695.9	580,667.49	803,869.85
16,800.0	90.00	179.18	11,250.0	7,531.0	-5,795.3	82.9	0.00	5,795.9	580,567.50	803,871.28
16,900.0	90.00	179.18	11,250.0	7,531.0	-5,895.3	84.4	0.00	5,895.9	580,467.51	803,872.71
17,000.0	90.00	179.18	11,250.0	7,531.0	-5,995.3	85.8	0.00	5,995.9	580,367.52	803,874.14
17,100.0	90.00	179.18	11,250.0	7,531.0	-6,095.3	87.2	0.00	6,095.9	580,267.53	803,875.57
17,200.0	90.00	179.18	11,250.0	7,531.0	-6,195.3	88.7	0.00	6,195.9	580,167.54	803,877.01
17,300.0	90.00	179.18	11,250.0	7,531.0	-6,295.3	90.1	0.00	6,295.9	580,067.55	803,878.44
17,400.0	90.00	179.18	11,250.0	7,531.0	-6,395.3	91.5	0.00	6,395.9	579,967.56	803,879.87
17,500.0	90.00	179.18	11,250.0	7,531.0	-6,495.3	93.0	0.00	6,495.9	579,867.57	803,881.30
17,600.0	90.00	179.18	11,250.0	7,531.0	-6,595.2	94.4	0.00	6,595.9	579,767.58	803,882.73
17,700.0	90.00	179.18	11,250.0	7,531.0	-6,695.2	95.8	0.00	6,695.9	579,667.59	803,884.16
17,800.0	90.00	179.18	11,250.0	7,531.0	-6,795.2	97.3	0.00	6,795.9	579,567.60	803,885.59
17,900.0	90.00	179.18	11,250.0	7,531.0	-6,895.2	98.7	0.00	6,895.9	579,467.61	803,887.02
18,000.0	90.00	179.18	11,250.0	7,531.0	-6,995.2	100.1	0.00	6,995.9	579,367.62	803,888.45
18,100.0	90.00	179.18	11,250.0	7,531.0	-7,095.2	101.6	0.00	7,095.9	579,267.63	803,889.89
18,200.0	90.00	179.18	11,250.0	7,531.0	-7,195.2	103.0	0.00	7,195.9	579,167.64	803,891.32
18,300.0	90.00	179.18	11,250.0	7,531.0	-7,295.2	104.4	0.00	7,295.9	579,067.65	803,892.75



# MOJO Standard Well Plan

<b>Company:</b>	Caza	<b>Local Co-ordinate Reference:</b>	Well Eagleclaw Federal 2H
<b>Project:</b>	Eagleclaw	<b>TVD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Site:</b>	Eagleclaw Federal 2H	<b>MD Reference:</b>	WELL @ 3719.0usft (Original Well Elev)
<b>Well:</b>	Eagleclaw Federal 2H	<b>North Reference:</b>	Grid
<b>Wellbore:</b>	Eagleclaw Federal 2H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Eagleclaw Federal 2H	<b>Database:</b>	EDM 5000.1 Single User Db

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	V. Sec (usft)	Northing (usft)	Easting (usft)	
18,400.0	90.00	179.18	11,250.0	7,531.0	-7,395.2	105.8	0.00	7,395.9	578,967.66	803,894.18	
18,500.0	90.00	179.18	11,250.0	7,531.0	-7,495.2	107.3	0.00	7,495.9	578,867.67	803,895.61	
18,600.0	90.00	179.18	11,250.0	7,531.0	-7,595.1	108.7	0.00	7,595.9	578,767.68	803,897.04	
18,700.0	90.00	179.18	11,250.0	7,531.0	-7,695.1	110.1	0.00	7,695.9	578,667.69	803,898.47	
18,800.0	90.00	179.18	11,250.0	7,531.0	-7,795.1	111.6	0.00	7,795.9	578,567.70	803,899.90	
18,900.0	90.00	179.18	11,250.0	7,531.0	-7,895.1	113.0	0.00	7,895.9	578,467.72	803,901.33	
19,000.0	90.00	179.18	11,250.0	7,531.0	-7,995.1	114.4	0.00	7,995.9	578,367.73	803,902.77	
19,100.0	90.00	179.18	11,250.0	7,531.0	-8,095.1	115.9	0.00	8,095.9	578,267.74	803,904.20	
19,200.0	90.00	179.18	11,250.0	7,531.0	-8,195.1	117.3	0.00	8,195.9	578,167.75	803,905.63	
19,300.0	90.00	179.18	11,250.0	7,531.0	-8,295.1	118.7	0.00	8,295.9	578,067.76	803,907.06	
19,400.0	90.00	179.18	11,250.0	7,531.0	-8,395.1	120.2	0.00	8,395.9	577,967.77	803,908.49	
19,500.0	90.00	179.18	11,250.0	7,531.0	-8,495.0	121.6	0.00	8,495.9	577,867.78	803,909.92	
19,600.0	90.00	179.18	11,250.0	7,531.0	-8,595.0	123.0	0.00	8,595.9	577,767.79	803,911.35	
19,700.0	90.00	179.18	11,250.0	7,531.0	-8,695.0	124.4	0.00	8,695.9	577,667.80	803,912.78	
19,748.0	90.00	179.18	11,250.0	7,531.0	-8,743.1	125.1	0.00	8,744.0	577,619.76	803,913.47	
TD at 19748.0											

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
10,677.0	10,677.0	0.0	0.0	Start Build 10.00
11,577.0	11,250.0	-572.9	8.2	Start 8171.0 hold at 11577.0 MD
19,748.0	11,250.0	-8,743.1	125.1	TD at 19748.0

Checked By: \_\_\_\_\_ Approved By: \_\_\_\_\_ Date: \_\_\_\_\_