1	OCD Hobbs							
Form 3160-5 (June 2015) DE	UNITED STATES PARTMENT OF THE INTERIOR URFAIL OF LAND MANAGEMENT				FORM APPROVED OMB NO. 1004-0137 Expires: January 31, 2018			
SUNDRY NOTICES AND REPORTS ON WELLS					5. Lease Serial No. NMNM108504			
SUBMIT IN TRIPLICATE - Other instructions on page 2					6. If Indian, Allottee or Tribe Name			
SUBMIT IN T	page 2 M	RIS	2. Unit or CA/Agreement, Name and/or No.					
 Type of Well Oil Well Gas Well Other 			RECL		8. Well Name and No. ANDRIKOPOULOS 01			
2. Name of Operator Contact: KAY MADDOX EOG RESOURCES INCORPORATEDE-Mail: KAY_MADDOX@EOGRESOURCES.COM						30-025-26438-00-S1		
3a. Address	(include area code) 10. F 6-3658 W			0. Field and Pool or Exploratory Area WILDCAT;WOLFCAMP				
MIDLAND, TX 79702				11. County or Parish, State				
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 24 T25S R33E NWSW 1980FSL 660FWL						OUNTY, NM		
Sec 24 1255 R33E NWSW 18		1						
12. CHECK THE AI	PPROPRIATE BOX(ES)	TO INDICA	ΓΕ NATURE O	F NOTICE,	, REPORT	, OR OTHER	DATA	
TYPE OF SUBMISSION	TYPE OF ACTION						-	
Notice of Intent	□ Acidize	Deep Deep		Product	,	INT TO P	A (2000)	
□ Subsequent Report	t Alter Casing		Hydraulic Fracturing		ation	P&A NR	A PP 1	
☐ Final Abandonment Notice			New Construction Plug and Abandon		emporarily Ab P&A R			
	Convert to Injection		Plug Back		Water Disposal			
following completion of the involved testing has been completed. Final Al determined that the site is ready for f EOG PROPOSES TO UTILIZ THE WELL IS CURRENTLY F ATOKA/MORROW.(REFERE 12,283-14,061' AND GATHEF WILL BE PLUGGED USING T	andonment Notices must be fil inal inspection. E THIS WELL FOR PRES PERFORATED BETWES NCE ATTACHED CURRI & PRESSURE DATA. TH	ed only after all SSURE TEST N 15,209-14,5 ENT WELLBC IS TESTING	requirements, includ ING BEFORE F 986' AND PROE 9RE SCHEMAT WILL TAKE AR	ding reclamatic PULGGING DUCES FRC IC) THE PL/ OUND ~30	on, have been IT. OM THE AN IS TO F DAYS. THI	Completed and the PERFORATE T EN THE WELL	e operator has	
EOG IS REQUESTING APPROVAL TO TEST AND THEN PLUG THIS WELL USING THE ATTACHED PROCEDURE.								
RECLAMATION PROCEDURE SEE ATTACHED FOR							OR	
ATTACHED CONDITIONS OF APPROVAL								
Below ground	(level day	how	e ma	chec	(eg	used	2	
14. I hereby certify that the foregoing is	Electronic Submission #	406699 verifie	d by the BLM We	Il Informatio	n System			
For EOG RESOURCES INCORPORATED, sent to the Hobbs Committed to AFMSS for processing by PRISCILLA PEREZ on 03/08/2018 (18PP0717SE)								
Name (Printed/Typed) KAY MAD	Title REGULATORY ANALYST							
Signature (Electronic Submission)			Date 03/06/2018					
	THIS SPACE FO	OR FEDERA	L OR STATE	OFFICE U	ISE			
Approved By James	a. ano-		Title Sup	V. AL	T		3-10-18 Date	
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would exite the applicant to conduct operations thereon. Office Carlsbac								
Title 18 U.S.C. Section 1001 and Title 43 States any false, fictitious or fraudulent	U.S.C. Section 1212, make it a statements or representations as	crime for any pe to any matter w	rson knowingly and thin its jurisdiction	l willfully to m	ake to any de	epartment or agenc	ey of the United	
(Instructions on page 2) ** BLM REVISED ** BLM REVI								
	FOR RECORD ONLY							
				NM	OCD	03/19/	2018	



Andrikopoulos Fed #1 - P&A

SECT 24, T25S, R33E

API # 30-025-26438

35' min.

- 1. Set 4-1/2" CIBP at 14,936' and dump 2 sx or 20' Class H on top of CIBP
 - 2. Set 7-5/8" CIBP at 12,233' and dump 5 sx or 20' on top of CIBP-
 - 3. Spot 40 sx class H cement (200') at 9,233' (Bore Spring)
 - 4. Spot 40 sx class H cement (200') at 6,233' (Spacer)
- Perf-5. Spot 50-sx class H cement (250') across 10-3/4" shoe (top of cement plug at 4875' and bottom of plug at 5125') & Top Deleware) Perf @ 5125 SQZ Cont to 4875 6. Tag plug at 4875' * Add Plug
- Aunt 7. Spot 40 sx class H (200') at 1875' 1350, SOZ Cont 1240 wor Tag (T/Sat)
 - 8. Perferate 7-5/8" at 1020' and squeeze cement to surface
 - 9. Cut off WH 3' below surface


* ALA


10. Weld on P&A marker. Cut off anchors 3' below surface and clean location.

* Add plug. from 14174 - 13934, wor Tag (Top Strawn) * Add plug. from 13350 - 13120. wor Tag (Top Wolfcomp) * Add plug. from 12686 - 12369, wor Tag (Shoe & Liner Top)

* Add plug, from 3872 - 3732, Perf @ 3872, SOZ crit to 3732 (wor Tag) Base Salt,

Plugs designed to isolate formations Pressure test perfs may need BP's capped w/ cnt to isolate parts and tormatic tops.

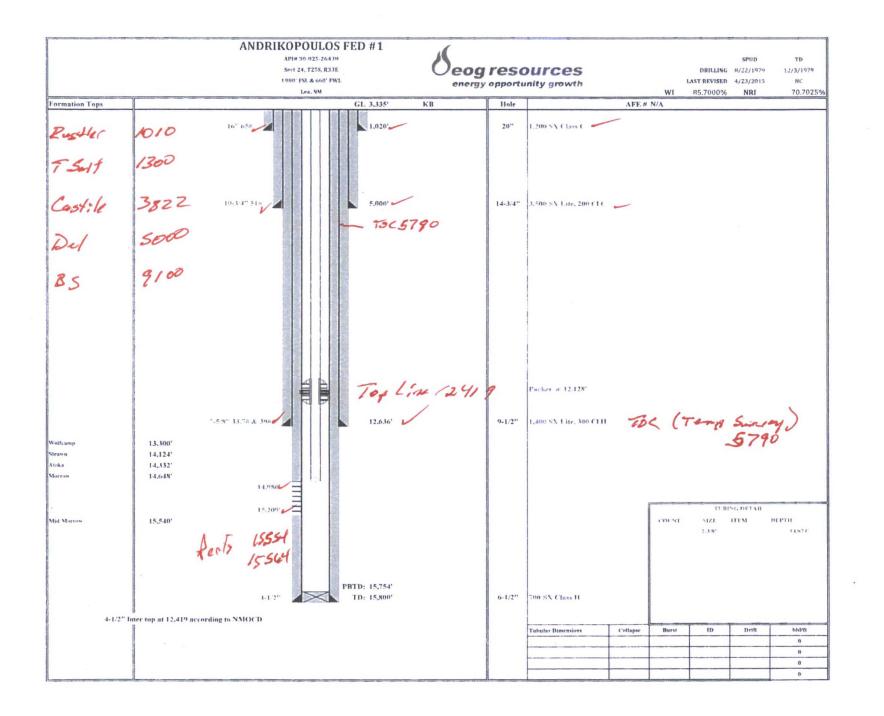

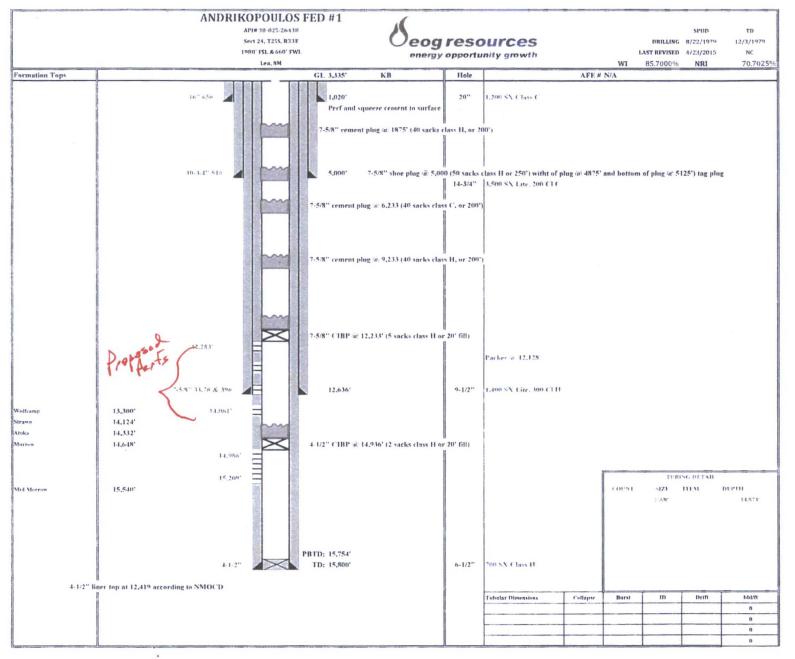

.

R

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval (LPC Habitat)

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.

3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.

5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. <u>Below Ground Level Cap (Lesser Prairie-Chicken Habitat)</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.** Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¹/₄ inch thick and welded in place. A weep hole shall be left in the plate and/or casing.

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

7. <u>Subsequent Plugging Reporting</u>: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:

From March 1st through June 15th annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted



United States Department of the Interior

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its predisturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any and all contaminants, scrap/trash, equipment, pipelines and powerlines. Strip and remove caliche, contour the location to blend with the surrounding landscape, redistribute the native soils, provide erosion control as needed, rip and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation

equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos

Supervisory Petroleum Engineering Tech 575-234-5909, 575-361-2648 (Cell)

Arthur Arias Environmental Protection Specialist 575-234-6230

Henryetta Price Environmental Protection Specialist 575-234-5951

Shelly Tucker Environmental Protection Specialist 575-234-5979

Trishia Bad Bear, Hobbs Field Station Natural Resource Specialist 575-393-3612