


# OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## MISCELLANEOUS REPORTS ON WELLS

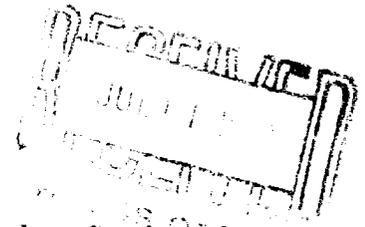

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING
REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON DEEPENING WELL
REPORT ON RESULT OF PLUGGING OF WELL		

July 9, 1949

Hobbs, New Mexico

Date

Place

OIL CONSERVATION COMMISSION,  
SANTA FE, NEW MEXICO  
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the Stanolind Oil & Gas Company State "A" Tract 10 Well No. 23-X in the

SE/4 Company or Operator of Sec. 33, T. 18-S, R. 38-E, N. M. P. M.,  
Bowers Field, Lea County.

The dates of this work were as follows: July 5-7, 1949

Notice of intention to do the work was (~~was not~~) submitted on Form C-102 on July 5, 19 49 and approval of the proposed plan was (~~was not~~) obtained. (Cross out incorrect words.)

### DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

On July 7, 1949, at 12:01 a.m., 48 hours had elapsed since running 3151' of 5 1/2" casing set at 3160', and cemented with 700 sacks to be used as oil string. At this time pipe and water shut off was tested by applying 1000 psi pressure and holding for 30 minutes before and after drilling cement plug. Pressure did not drop in excess of 100 psi. Drilling was resumed.

Temperature survey was not taken since cement was circulated to surface.

Witnessed by A.W. Gibson Stanolind Oil & Gas Company Head Roustabout  
Name Company Title

Subscribed and sworn before me this 9th day of July 19 49  
[Signature]  
Notary Public

I hereby swear or affirm that the information given above is true and correct.

Name [Signature]  
Position Production Foreman  
Representing Stanolind Oil & Gas Company

My commission expires 2-23-50

Company or Operator  
Address Box "F", Hobbs, New Mexico

Remarks:

APPROVED  
JUL 12 1949

[Signature]  
Name  
Title