


OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

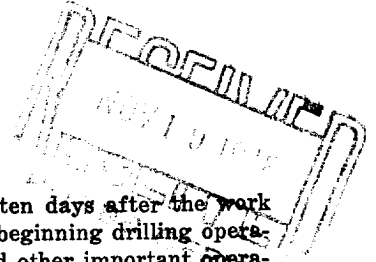

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS	REPORT ON REPAIRING WELL
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL	REPORT ON PULLING OR OTHERWISE ALTERING CASING
REPORT ON RESULT OF TEST OF CASING SHUT-OFF	REPORT ON DEEPENING WELL
REPORT ON RESULT OF PLUGGING OF WELL	Report on Gun Perforating X

November 16, 1948 Monument, New Mexico.
Date Place

OIL CONSERVATION COMMISSION,
SANTA FE, NEW MEXICO
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the _____
Amerada Petroleum Corporation Phillips A Well No. 3 in the _____
 Company or Operator Lease
SW 1/4 NE 1/4 of Sec. 31, T. 19S, R. 37E, N. M. P. M.,
Monument Field, Lea County.

The dates of this work were as follows: November 15, 1948
 Notice of intention to do the work was (~~was not~~) submitted on Form C-102 on November 13 19 48
 and approval of the proposed plan was (~~was not~~) obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

3870' Estimated plugged back depth, Picked up drill pipe and found top of cement at 3858' and drilled out cement to 3905', Gun perforated with Lane Wells 3892' to 3903' w/ 44 holes, Ran DST TD 3905', packer set at 3880', perforations 3881-3902, 5/8" Bottom and 1" Top choke, opened tool @ 12:15AM with good blow of air immediately, decreased after 30 minutes and had weak blow for 3 1/2 hours, tool open 4 hours, closed tool @ 4:15AM, recovered 225' Mud slightly oil & gas cut, 630' Sulphur salt water slightly oil & gas cut, Amerada Bomb Hydrostatic Pressure in 1770#, out 1520#, Min Flow press 90#, Max 310#, 15 minutes build up pressure 440#. We will run Baker cement retainer and squeeze off bottom perforations & retest.

Witnessed by C. E. Telge Amerada Pet. Corp. Farm Boss
Name Company Title

Subscribed and sworn before me this _____

16 day of November 19 48

Will Hails Taylor
 Notary Public

I hereby swear or affirm that the information given above is true and correct.

Name [Signature]

Position Asst. Dist. Supt.

Representing Amerada Pet. Corp.
 Company or Operator

My commission expires _____

Address Drawer D, Monument, New Mexico.

Remarks:

[Signature]
 Name
[Signature]
 Title

APPROVED
 NOV 19 1948

1936
1937